




F106 Pro

MECHANICAL KEYBOARD

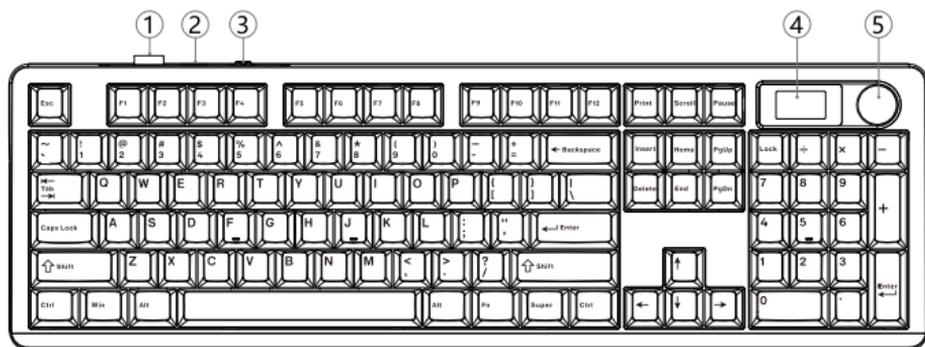

- ① Receiver storage compartment ② USB-C interface ③ ON/OFF
④ LCD screen display ⑤ Knobs and knob buttons

Fashionable appearance design, GASKET structure, and delicate soft and bouncy hand feel.

Keycaps (optional) and mechanical switches (optional) be plugged in and unplugged. Users can also purchase switches and personalized keycaps from various brands in the market to DIY freely.

The keyboard is made of solid materials has a sensitive key response.

The keyboard has a 1.14-inch TFT display in the upper right corner with a variety of functions that can be DIY with driver. The knob and button in the upper right corner of the keyboard can be used with the TFT screen. The knob rotates to adjust the menu, and the knob is-pressed to confirm and return to the previous menu.

The keyboard TFT screen has a time display and calendar display. If the bottom power switch is turned off at the or during normal use, it is necessary to turn on the power switch and calibrate the time and calendar with the driver.

Wired mode/power on/off

02


- ① Rotate the knob to scroll the LCD screen menu "Connection Method" to wired mode



② The screen displays 'USB mode, please connect USB cable'. If the USB is inserted within 5 seconds, it will show 'USB connection successful'. If not inserted, it will show 'USB connection failed'

③ After successful connection, the corresponding icon on the main menu of the LCD screen will also be highlighted.

2.4G Connection Instructions

03

- ① Rotate the knob to scroll the LCD screen menu "Connection Method" to 2.4G mode

② Short press the knob to display "2.4G reconnection in progress" on the screen, long press the knob for 5 seconds to display "2.4G pairing in progress" on the screen

③ Insert the receiver, and the screen displays '2.4G pairing successful', indicating successful pairing.

Attention: When connecting to 2.4G, search first and then plug in the receiver; The factory default code has been matched; The corresponding icon on the main menu of the LCD screen will also be highlighted.

BT Connection Instructions

04

- ① Rotate the knob to scroll through the LCD screen menu and select "Connection Method" to Bluetooth

② Press and hold the knob for 5 seconds to select the screen display "BT1 in process of reconnection", and press and hold the knob for 5 seconds to display "BT1 in process of pairing"

③ The screen displays 'BT1 pairing successful' and the corresponding icon on the main menu of the LCD screen will also be highlighted. Device name AULA F106Pro-1

Attention: In BT mode, 3 devices can be connected. The BT names are AULA F106Pro -1, AULA F106Pro -2, AULA F106Pro -3.

SYSTEM	Win/Mac/iOS/Android	BRIGHTNESS	Backlight Brightness +/-
EFFECT	Toggle the Backlight RGB	SPEED	Backlight Speed +/-
COLOUR	Toggle the Backlight colour	VOLUME	Control the Volume +/-
LANGUAGE	Toggle the screen language (Chinese or English)		

Standard version shortcut key description

Fn+	ESC	WIN-L	∨	TAB
Combined function	Restore the default	Lock WIN	Backlighting effect switching	Backlight colour switching
Fn+	/?	Shift-R	Ctrl-R	Alt-R
Combined function	Switching RGB ambient light bar colours on both sides	Switching RGB ambient light bar mode	Cycle through RGB ambient light bar speeds on both sides	Switching the brightness of RGB ambient light

Shortcut Key Description

Android system F-zone single press function and F-zone FN combination function

Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3	Convert Window	F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12

Windows system F-zone single press function and F-zone FN combination function

Key position	Single press	Fn combination
F1	F1	Browser homepage
F2	F2	mail
F3	F3	Convert Window
F4	F4	open Resource Manager
F5	F5	Main backlight brightness-
F6	F6	Main backlight brightness+

Key position	Single press	Fn combination
F7	F7	Previous song
F8	F8	play/pause
F9	F9	Next song
F10	F10	mute
F11	F11	Volume-
F12	F12	Volume+

Mac system F-zone single press function and F-zone FN combination function

Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3	Convert Window	F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12

IOS system F-zone single press function and F-zone FN combination function

Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3	Convert Window	F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6


Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12

Intelligent sleep mode description



- Under BT/2.4G mode, if there is no operation for 5 minutes, it will automatically enter power-saving mode. Click the button to wake up the keyboard.

Charging Instructions

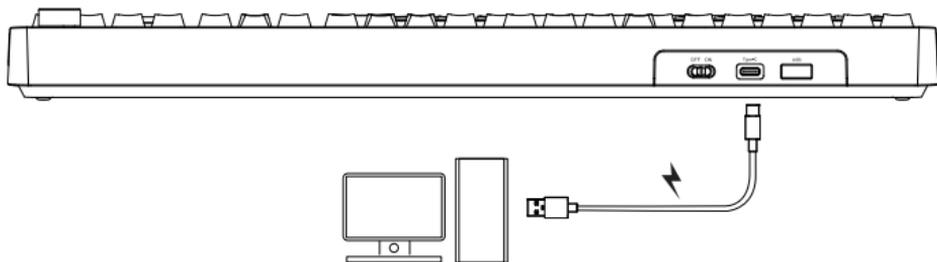

- USB-C connectivity is more reliable, performance is more stable, and charging is faster

  <p>Charging instructions</p>	<ol style="list-style-type: none">1. It is recommended to use only the computer USB port to charge the keyboard.2. Do not use fast-charging cell phone chargers to charge the keyboard.3. Do not use inferior non-standard power adapter to charge the keyboard.4. Do not use over-voltage and over-current power adapter to charge the keyboard.5. Please keep away from high temperature equipment when charging6. Please turn off the power switch if it is not used for a long time. <p>The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)</p>
--	--

Mechanical Keyboard

- Connection: Type-C Wired & 2.4G Wireless & BT
- FN key multi-function
- Number of keys: 104 keys
- Rated voltage: DC 5V
- Rated current: <1200mA
- Rechargeable battery 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Weight: 1235g
- Operating system: WIN XP/7/8/10/MAC/Android/IOS

사용자 매뉴얼

기계적 키보드

- 연결: Type-C Wired & 2.4G Wireless & BT
- FN 키 다기능
- 키 수: 104 키
- 정격전압: DC 5V
- 정격 전류: <1200mA
- 충전식 배터리 8000mAh
- 크기: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- 무게: 1235g
- 운영체제: WIN XP/7/8/10/MAC/Android/IOS

Teclado mecânico

- Conexão: Tipo C com fio e 2,4G sem fio e BT
- Tecla FN multifuncional
- Número de teclas: 104 teclas
- Tensão nominal: DC 5V
- Corrente nominal: <1200mA
- Bateria recarregável de 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Peso: 1235g
- Sistema operacional: WIN XP/7/8/10/MAC/Android/IOS

Manual de usuario

Teclado mecánico

- Conexión: Tipo-C con cable&2.4G inalámbrico&BT
- Tecla FN multifunción
- Número de teclas:104 teclas
- Tensión nominal: 5 V CC
- Corriente nominal: <1200mA
- Batería recargable 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Peso: 1235g
- Sistema operativo: WIN XP/7/8/10/MAC/Android/IOS

Mechanische Tastatur

- Anschluss: Type-C Wired & 2.4G Wireless & BT
- FN-Tasten-Multifunktion
- Anzahl der Tasten: 104 Tasten
- Nennspannung: DC 5V
- Nennstrom: <1200mA
- Aufladbare Batterie 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Gewicht: 1235g
- Betriebssystem: WIN XP/7/8/10/MAC/Android/IOS

Manuale d'uso



Tastiera meccanica

- Collegamento: Tipo-C cablato & 2.4G senza fili & BT
- Tasto FN multi-funzione
- Numero di tasti: 104 tasti
- Tensione nominale: DC 5V
- Corrente nominale: <1200mA
- Ricaricabile battery 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Peso: 1235g
- Sistema operativo: WIN XP/7/8/10/MAC/Android/IOS

Механическая клавиатура

- Подключение: проводное Type-C и беспроводное 2.4G&BT
- Многофункциональная клавиша FN
- Количество клавиш: 104 клавиши
- Номинальное напряжение: DC 5V
- Номинальный ток: <1200 мА
- Заряжаемый аккумулятор 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Вес: 1235g
- Операционная система: WIN XP/7/8/10/MAC/Android/IOS

คู่มือการใช้

เป็นพิมพ์เชิงกล

- การเชื่อมต่อ: ty - cWired & 2.4 GWireless & BT
- ปุ่มมัลติฟังก์ชัน FN
- จำนวนปุ่ม: 104 คีย์
- แรงดันไฟฟ้า ที่ได้รับการจัด อันดับ: DC 5 V
- กระแสไฟฟ้า ที่มีการจัด อันดับ: < 1200 mA
- แบตเตอรี่ชาร์จไฟได้ 8000 mAh
- ขนาด:445.17(L)×142.94(L)×43.46(L)±0.1 mm
- น้ำหนัก: 1235g
- ระบบปฏิบัติการ: WINXP/7/8/10/MAC/Android/IOS



ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.

Спасибо за выбор продуктов AULA.

Компьютерные Клавиатура и мышь – основные устройства управления компьютером, предназначены для ввода данных (могут быть проводными или беспроводными (2.4 Гц с передатчиком в комплекте или Bluetooth без передатчика)).

Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голоса) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4Гц, Bluetooth, 2.4Гц+ Bluetooth)).

Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.

Стенд/Подставка для ноутбука/планшета необходима для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.

Колонки 2.0/2.1 предназначены для воспроизведения музыки и других аудио файлов, подключаются к ПК, ноутбукам, планшетам, смартфонам через разъем 3.5 мм, питаются от USB.

USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопители памяти, дополнительные мониторы и проводной интернет.

Подробные характеристики товара находятся на сайте www.aulagaming.ru

Подключение:

Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB/аудиоразъему (для гарнитур/ колонок) и проверьте работоспособность.

Изготовитель: DONGGUAN SUOAI ELECTRONICS CO.,LTD. Address: NO.3 HUAYU STREET, CHANGLONG VILLAGE HUANGJIANG TOWN, DONGGUAN CITY, Донгуан Суоай Электроникс Ко. ЛТД. Адрес: NO.3 ХУАЮ СТРИТ, ЧАНГЛОНГ ВИЛЛАДЖ ХУАНГЖИАНГ ТАУН, ДОНГУАН СИТИ. Импортёр/Организация уполномоченная принимать претензии: ООО «Техпорт». Адрес: 107140, Москва г, внутригородская территория муниципальный округ Красносельский, 1-й Красносельский ПЕР., дом № 9А, офис Этаж 3, Часть Пом. 9Б, 9Г, телефон: +79153075886, электронная почта: Ootechport@ua.ru. Товар соответствует требованиям ТР ТС 037/2016 «Об ограничении применения опасных веществ в изделия электротехники и радиоэлектроники» (для компьютерных мышей, клавиатур и гарнитур/колонок), а так же ТР ТС 020/2011 «Электромагнитная совместимость технических средств» (для колонок, Bluetooth/2.4Гц гарнитур, клавиатур и мышей с беспроводным способом подключения (Bluetooth/2.4Гц)). Информация о разрешительной документации размещена на упаковке. Коврики для мыши/стенды/ подставки для ноутбука/планшета обязательной сертификации не подлежат. Информация о гарантийном обслуживании предоставлена на сайте www.aulagaming.ru. Гарантийный срок: 1 год. Срок службы: 2 года. Срок годности: не ограничен. Дата производства указана на упаковке. Использовать только по прямому назначению. Не ронять, не разбирать, беречь от огня, перегрева и попадания жидкости. Конструкция, внешний вид и технические характеристики могут быть изменены без предварительного уведомления. Страна изготовления: Китай.



www.aulagaming.ru

Clavier mécanique

- Connexion : Type-C filaire&2.4G sans fil&BT
- Touche FN multifonction
- Nombre de touches : 104 touches
- Tension nominale : 5V DC
- Courant nominal : <1200mA
- Batterie rechargeable 8000mAH
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Poids : 1235g
- Système d'exploitation : WIN XP/7/8/10/MAC/Android/IOS

Посібник користувача

Механічна клавіатура

- Підключення: дротовий Type-C та бездротовий 2.4G і BT
- Багатофункціональна клавіша FN
- Кількість клавіш: 104 клавіші
- Номінальна напруга: постійного струму 5В
- Номінальний струм: <1200 мА
- Акумуляторна батарея 8000mAH
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Вага: 1235g
- Операційна система: WIN XP/7/8/10/MAC/Android/IOS

Keyboard Mekanis

- Koneksi: Kabel Tipe-C & Nirkabel 2.4G & BT
- Multi-fungsi tombol FN
- Jumlah tombol: 104 tombol
- Tegangan pengenalan: DC 5V
- Nilai arus: <1200mA
- Baterai yang dapat diisi ulang 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Berat: 1235g
- Sistem operasi: MENANGKAN XP / 7/8/10 / MAC / Android / iOS

ユーザーマニュアル

メカニカルキーボード

- 接続: Type-C有線&2.4Gワイヤレス&BT
- FNキー多機能
- キー数: 104キー
- 定格電圧: DC 5V
- 定格電流 <1200mA
- 充電電池: 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- 重量: 1235g
- 操作システム WIN XP/7/8/10/MAC/Android/IOS

Mekanik Klavye

- Bağlantı: Type-C Kablolu & 2.4G Kablosuz & BT
- FN tuşu çok fonksiyonlu
- Tuş sayısı: 104 tuş
- Nominal gerilim : DC 5V
- Nominal akım: <1200mA
- Şarj edilebilir batarya 8000mAh
- Size: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Ağırlık: 1235g
- İşletim sistemi: WIN XP/7/8/10/MAC/Android/IOS

Hướng dẫn sử dụng

Bàn phím cơ khí

- Kết nối: Type-C Wired & 2.4G Wireless & BT
- FN Key đa chức năng
- Số khóa: 104
- Điện áp xếp loại: DC 5V
- Dòng chảy: < 1200mA
- Dung tích 8000mAh
- Kích thước: 445.17(L)×142.94(L)×43.46(L)±0.1 mm
- Trọng lượng: 1235g
- Hệ điều hành: WIN XP / 7/8/10 / MAC/Android/IOS



Dongguan Suoai Electronics CO.,LTD

www.aulastar.com

SOAI Industry Park, Huayu Street Changlong

Village Huangjiang Town Dongguan City

Guangdong Province

Execution Standard:GB/T 14081-2010

Made in China



Points de collecte sur www.quefairedemesdechets.fr

说明书技术要求：

1.成品尺寸：**100x130mm**

2.材质：120g铜版纸+打骑马钉

3.工艺：单黑双面印刷