


封面

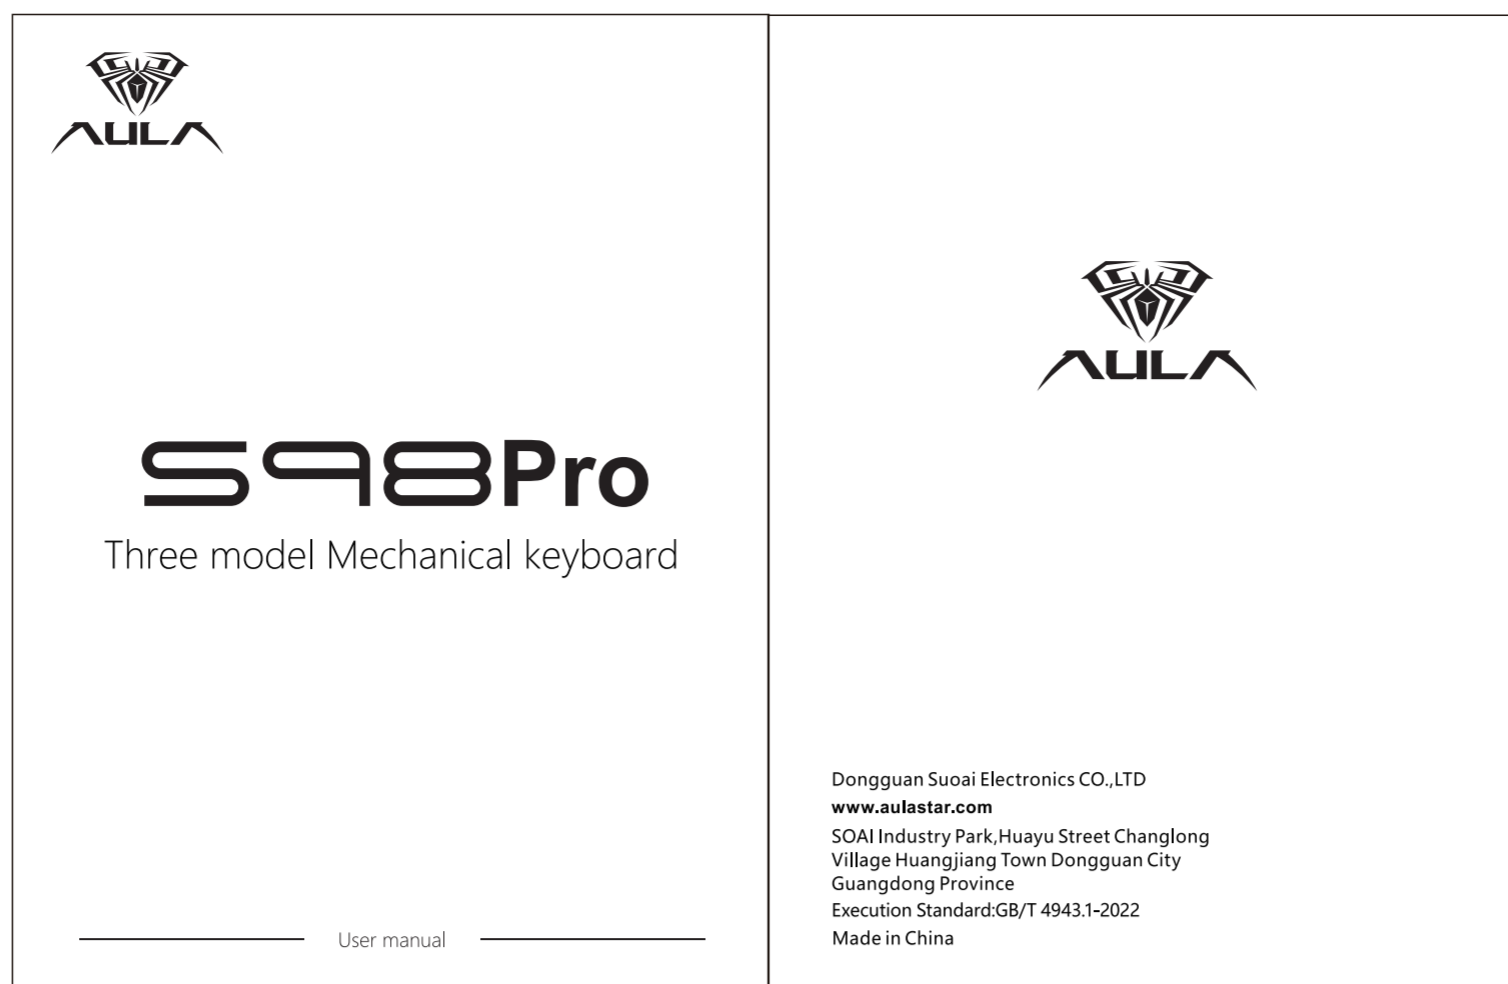

封底

Keyboard Function Description 01

- Type-C interface
- Keyboard toggle switch
- USB receiver
- Indicator light
- LCD screen
- Multi-function knob

- Stylish appearance design, gasket structure, delicate and soft texture. The keyboard is made of solid materials and the keys are responsive.
- Hot-swappable mechanical keyboard with PBT keycaps and mechanical switches; users can also buy various brands of switches and personalized keycaps on the market for free DIY.
- Tri-mode connection: 2.4GHz/BT 5.0/USB C wired.
- Keyboard return rate: wired mode 1000Hz, 2.4G mode 1000Hz, Bluetooth mode 125Hz.
- 1.14-inch LCD display shows time, date and battery level. First time use requires turning on the power switch and calibrating the time and calendar with the driver.
- Multi-function knob works with the display to adjust connection mode, system, lighting effects, multimedia volume and language. Rotate the knob to adjust the menu, short press the knob to confirm and return to the previous menu.
- 19 RGB light effects and music rhythm light effects can be easily switched by the driver.
- Customized driver can set key combination function, macro editing, light setting, display time, calendar and custom GIF.
- 5000mAh large capacity Li-ion battery can be recharged repeatedly to extend battery life.
- S98pro driver download: bit.ly/m/AULA (Note: The driver needs to be downloaded and used in wired mode under windows system.)

1

Wired Mode/On/Off 02

- Rotate the knob to scroll the LCD screen menu.
- The screen displays "USB Connection Method" to wired mode.
- Insert USB cable within 5S and display "USB connection successful". If not inserted, display "USB connection failed".

Note: After successful connection, the corresponding icon on the main menu of the LCD screen will also be highlighted.

Power on/off instructions

- Turn the toggle switch to OFF (without USB power), and the keyboard will be turned off. The built-in battery will stop supplying power to the keyboard.

2.4G Connection Instructions 03

- Short press the knob to select "Connect".
- Rotate the knob to 2.4G mode, then press and hold for 5S.
- Screen displays "2.4G Pairing".
- Insert the USB receiver to your device.
- Screen displays "2.4G Success!".

- Attention: When connecting to 2.4G, search first before inserting the receiver. The default factory code has been matched.
- The corresponding icon on the main menu of the LCD screen will also be highlighted.

2

BT Connection Instructions 04

- Short press the knob to select "Connect".
- Rotate the knob to BT1, then press and hold for 5S.
- Screen displays "BT1 Pairing".
- Search for the BT device (AULA-S98Pro-1) on your device and connect.
- Screen displays "BT1 Success!". Then finished.

- Note: Connect other BT channels and adjust the screen to BT1/BT2/BT3 for switching.
- The corresponding icon on the main menu of the LCD screen will also be highlighted after successful connection.

3

Backlight Effect Adjustment 05

Scroll to the "Light Effects" mode on the LCD screen, switch between 19 RGB light effects, and turn off a total of 20 light effects.

| | | | | |
|------------------------------------|--------------------------------------|-------------------------------|----------------------------------|----------------------------|
| Adrift (flashes our light effects) | The path winds along mountain ridges | be touch-and-go | Will two birds with one stone | Ripple diffusion |
| a continuous flow | range upon range of mountains | light wind and drizzling rain | Shuttle back and forth | Static constant brightness |
| Single light up | Single extinction | was studied with stars | Flying snow all over the sky | Flowers are blooming |
| Dynamic respiration | Spectral cycle | Colorful spring surging | Colorful Vertical and Horizontal | OFF |

Scroll to the "Light Color" mode on the LCD screen to switch between RGB, red, orange, yellow, green, cyan, blue, purple, and white.

- Equipped with music and dynamic RGB lighting effects in conjunction with the driver.

4

Backlight Effect Roller Adjustment

- Scroll to the "Light Brightness" mode on the LCD screen and switch to 5 levels of brightness, with each level being 20%. Rotate the knob clockwise to increase the brightness of the light, and counterclockwise to decrease the brightness of the light.
- Scroll to the "Light Speed" mode on the LCD screen and switch to 5 speed levels, with each level being 20%. Rotate the knob clockwise to increase the light speed, and counterclockwise to decrease the light speed.

- Scroll to the "Volume Adjustment" mode on the LCD screen to increase the volume clockwise and decrease the volume counterclockwise, and the corresponding volume icon will flash.
- Screen menu in English (default English)

5

Front Side Decorative Light Adjustment 06

| | | | |
|-----------|--------------------------------------|---------|--|
| FN+ Shift | Switch light bar mode | FN+ . > | Switch the brightness of the light bar |
| FN+ Ctrl | Switching the speed of the light bar | FN+ / ? | Switching Light Bar Colors (streaming and constant light mode) |

Operating System Mode Switching 07

- On the LCD screen, enter "System Switching", where there are four systems to choose from: "WIN", "MAC", "IOS", and "Android".

Switch to Mac/iOS system and switch button positions (non lock WIN as shown in the table below):

| | | | | |
|-------------|-------------|--------------|---------------|--------------|
| WIN/Android | Left WIN | Left ALT | Right ALT | Right CTRL |
| Mac/iOS | Left Option | Left Command | Right Command | Right Option |

6

Shortcut Key Description 08

| | | | | | |
|-----|-------|--|-----|------|-------|
| FN+ | ESC | Long press for 3 seconds to restore factory settings | FN+ | I | SCRLK |
| | WIN-L | Lock WIN key, WIN key cannot be used when locked | | O | PAUSE |
| | DEL | INS | | PgUp | Home |
| | U | PRTSKR | | PgDn | End |

The Android system F zone single press function and F zone FN combination function.

| | | | | | |
|--------------|----------------------------|----------------|--------------|---------------|----------------|
| Key position | Single press | Fn combination | Key position | Single press | Fn combination |
| F1 | Screen brightness- | F1 | F7 | Previous song | F7 |
| F2 | Screen brightness+ | F2 | F8 | play/pause | F8 |
| F3 | Convert Window | F3 | F9 | Next song | F9 |
| F4 | Return to desktop | F4 | F10 | mute | F10 |
| F5 | Main backlight brightness- | F5 | F11 | Volume- | F11 |
| F6 | Main backlight brightness+ | F6 | F12 | Volume+ | F12 |

7

Windows system F zone single press function and F zone FN combination function.

| | | | | | |
|--------------|--------------|----------------------------|--------------|--------------|----------------|
| Key position | Single press | Fn combination | Key position | Single press | Fn combination |
| F1 | F1 | Home | F7 | F7 | Previous song |
| F2 | F2 | mail | F8 | F8 | play/pause |
| F3 | F3 | Convert Window | F9 | F9 | Next song |
| F4 | F4 | open Resource Manager | F10 | F10 | mute |
| F5 | F5 | Main backlight brightness- | F11 | F11 | Volume- |
| F6 | F6 | Main backlight brightness+ | F12 | F12 | Volume+ |

Mac system F zone single press function and F zone FN combination function.

| | | | | | |
|--------------|----------------------------|----------------|--------------|---------------|----------------|
| Key position | Single press | Fn combination | Key position | Single press | Fn combination |
| F1 | Screen brightness- | F1 | F7 | Previous song | F7 |
| F2 | Screen brightness+ | F2 | F8 | play/pause | F8 |
| F3 | Convert Window | F3 | F9 | Next song | F9 |
| F4 | Return to desktop | F4 | F10 | mute | F10 |
| F5 | Main backlight brightness- | F5 | F11 | Volume- | F11 |
| F6 | Main backlight brightness+ | F6 | F12 | Volume+ | F12 |

8

The IOS system F zone single press function and F zone FN combination function.

| | | | | | |
|--------------|----------------------------|----------------|--------------|---------------|----------------|
| Key position | Single press | Fn combination | Key position | Single press | Fn combination |
| F1 | Screen brightness- | F1 | F7 | Previous song | F7 |
| F2 | Screen brightness+ | F2 | F8 | play/pause | F8 |
| F3 | Convert Window | F3 | F9 | Next song | F9 |
| F4 | Return to desktop | F4 | F10 | mute | F10 |
| F5 | Main backlight brightness- | F5 | F11 | Volume- | F11 |
| F6 | Main backlight brightness+ | F6 | F12 | Volume+ | F12 |

Intelligent Sleep Mode Description 09

- In Bluetooth/2.4G mode, after 5 minutes of inactivity, the keyboard automatically enters power-saving mode. Click the button to wake up the keyboard.

9

Charging Instructions 10

- Connect the keyboard to the computer through the equipped USB cable to charge the keyboard.

Charging instructions

- It is recommended to use only the computer USB port to charge the keyboard.
- Do not use fast-charging USB power adapters to charge the keyboard.
- Do not use inferior non-standard power adapters to charge the keyboard.
- Do not use over-voltage and over-current power adapters to charge the keyboard.
- Please keep away from high temperature equipment when charging.
- Please turn off the power switch if it is not used for a long time.

The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)

10

Product Parameters 11

- Number of keys: 96
- Total travel of buttons: 4.0m
- FN key multifunctional
- Product size: 406.6 x 137.9 x 45.1 ± 0.2mm
- Product weight: approximately 866g (including keycaps/shafts, excluding wires/receivers)
- Approximately 906g (including keycaps/shafts/wires/receivers)
- Charging voltage/current: DC 5V max 1250mA
- Rated voltage: DC 3.7V (fully charged with 4.2V)
- Rated current: < 245mA @ 3.7V (default light effect)
- < 75mA (turn off backlight and light strip)
- Battery life: > 20 hours (default light effect)
- > 66.5 hours (turn off backlight and light strip)
- Battery capacity: 5000mAh rechargeable lithium battery
- Charging interface: Type-C interface
- Computer system requirements:
 - Wired/2.4G mode: Windows ALL operating system WIN XP, WIN7, WIN8, WIN10 (drivers may be required in Win95, Win98 systems).
 - BT mode: WIN8, WIN10 and above systems.
 - BT mode: MAC computer with BT BLE 4.0, BLE 5.0 and above hardware, Android phone or tablet, IOS phone or tablet.
- Hardware connection:
 - Wired mode/2.4G receiver: configured with USB 1.1 or above ports.
 - The wired USB/2.4G receiver supports hot swapping (plug and play).
 - Switch to the corresponding channel in Bluetooth mode, and connect to the BT terminal device to use it.

11

Description of Warranty Matters 12

Dear Customer:

Thank you for purchasing AULA series products! This warranty card is the proof of AULA products, which is kept by the user, with this warranty card you will enjoy the after-sales service provided by AULA. This warranty card is a copy of each product and will not be replaced if lost, so please keep it in a safe place.

I. With this card you will enjoy the following rights and services:

- Return service: within seven days from the date of sale of the product, the product quality problems, according to the provisions of the national "three packages", in the case of the product appearance and packaging intact, the product will be returned to the seller or tarantula designated places, with the purchase of the valid certificate, return the product you paid for the purchase price.
- Warranty service: If the product performance failure is detected by AULA after-sales service center within 12 months from the date of purchase, you can enjoy the maintenance service free of charge.

II. The following situations do not belong to the free service scope:

- Exceeding the specified warranty period;
- Cannot show the valid warranty certificate or the original serial number label has been altered, replaced, torn and other phenomena;
- There is no serial number on the product or the product model on the warranty certificate does not match the product in kind;
- Failure and damage caused by abnormal use, maintenance and storage;
- Failure or damage caused by repair, change or disassembly of the product by non-authorized maintenance personnel of our company;
- Failure or damage caused by accidents or other force majeure;
- Services and additional accessories or gifts outside the product promised by the sales staff are not included in the scope of this warranty service;
- Failure or damage caused by unstable power supply or voltage.

12

说明书技术要求:

- 成品尺寸: 100x130mm
- 材质: 120g铜版纸+打骑马钉
- 工艺: 单黑双面印刷