




**Description of functions and indicators**

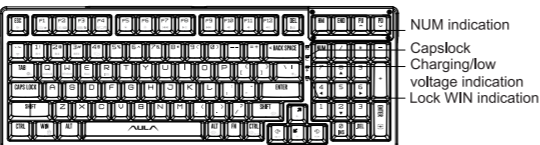

**Product features**

1. Stylish design with Gasket construction, soft and flexible feel
2. Transparent keycaps, special character process, not easy to fade
3. Keycaps and mechanical switches are pluggable.
4. Large-capacity lithium battery can be recharged, with power switch, environmental protection and energy saving, effectively extending battery life.
5. FN+| key combination to switch between 19 RGB light effects
6. Cooperate with the drive keys with custom functions and macro definitions.
7. Humanized design of the keyboard, adding a series of commonly used shortcut function keys in cooperation with Fn.

**Specifications**

- Connection: Type-C wired & 2.4G wireless & BT
- With Gasket construction
- Number of keys: 99 keys
- Hot-Swappable
- RGB switchable lighting effects
- Lithium battery: rechargeable lithium battery 2000mAh\*2
- Charging voltage/current: DC 5V/ = 600mA
- Rated voltage: DC 3.7V

- Battery life: ≧ 32 hours (default lighting effect)  
≧ 133 hours (with backlight and side lights off)
- Dimensions: 384.98 (L) × 138.20 (W) × 40.68 (H) ± 0.5mm
- Weight: 1074g
- Operating system: WIN XP7/8/10/Android/IOS/MAC

**Standard version shortcut key description**

Fn+	ESC	~`	1	2
Combination Function	Restore Default	2.4G mode	BT device 1#	BT device 2#
Fn+	3	4	TAB	Q
Combination Function	BT device 3#	Wired mode	Color Toggle	Android system
Fn+	W	E	R	DEL
Combination Function	Windows system	Mac system	IOS system	INS
Fn+	WIN-L		↑	↓
Combination Function	Lock WIN	Light mode switching	Brightness+	Brightness-
Fn+	←	→	Shift-R	Alt-R
Combination Function	Speed-	Speed+	Switching side Lamp mode	Switch side lamp brightness
Fn+	Ctrl-R	U	I	O
Combination Function	Switching side lamp speed	PRT	SCR	PAUSE
Fn+	/?			
Combination Function	Switching sidelight colours			



Dongguan Suoai Electronics CO.,LTD  
**www.aulastar.com**  
 SOAI Industry Park, Huayu Street Changlong  
 Village Huangjiang Town Dongguan City  
 Guangdong Province  
 Execution Standard: GB/T 14081-2010  
 Made in China

FN+Q = Android (Q button red light flashes for 3s), single press function in F zone with FN combination function in F zone

Key	F1	F2	F3	F4
Single press	Screen Brightness-	Screen Brightness+	Switching windows	Back to desktop
Fn combination	F1	F2	F3	F4
Key	F5	F6	F7	F8
Single press	Brightness-	Brightness+	Previous song	Play/pause
Fn combination	F5	F6	F7	F8
Key	F9	F10	F11	F12
Single press	Next song	Mute	Volume-	Volume+
Fn combination	F9	F10	F11	F12

FN+W = Windows system (W key red light flashes for 3s), F zone single press function with F zone FN combination function.

Key	F1	F2	F3	F4
Single press	F1	F2	F3	F4
Fn combination	Home	Email	Switching windows	Open Explorer
Key	F5	F6	F7	F8
Single press	F5	F6	F7	F8
Fn combination	Brightness-	Brightness+	Previous song	Play/pause
Key	F9	F10	F11	F12
Single press	F9	F10	F11	F12
Fn combination	Next song	Mute	Volume-	Volume+

FN+E = Mac system (E button red light flashes for 3s), F zone single press function with FN combination function in F zone

Key	F1	F2	F3	F4
Single press	Screen Brightness-	Screen Brightness+	Mission Control	Application switching
Fn combination	F1	F2	F3	F4
Key	F5	F6	F7	F8
Single press	Brightness-	Brightness+	Previous song	Play/pause
Key	F9	F10	F11	F12
Single press	Next song	Mute	Volume-	Volume+
Fn combination	F9	F10	F11	F12

FN+R = IOS system (R button red light flashes for 3s), single press function in F zone with FN combination function in F zone.

Key	F1	F2	F3	F4
Single press	Screen Brightness-	Screen Brightness+		Back to desktop
Fn combination	F1	F2	F3	F4
Key	F5	F6	F7	F8
Single press	Brightness-	Brightness+	Previous song	Play/pause
Fn combination	F5	F6	F7	F8
Key	F9	F10	F11	F12
Single press	Next song	Mute	Volume-	Volume+
Fn combination	F9	F10	F11	F12

**Operating instructions**

FN + ` = switch to 2.4G mode ~` key cyan light slow flashing, then long press FN + ` key cyan light fast flashing into the code state, then insert the receiver to complete the code, ~` key cyan light 2s, 2.4G link successfully. Note: 2.4G connection first search before inserting the receiver. The factory default has been coded.

BT mode BLE5.1, 3 devices can be connected:  
 FN+1=BT 1 (device name BLE5.1 KB-1) .The key is a blue indicator, the blue light flashes fast when the channel is broadcast by a long press of 5s, and the blue light is on for 2s when it is connected back/on.  
 FN+2=BT 2 (device name BLE5.1 KB-2) .The key is a blue indicator, the blue light flashes fast when the channel is broadcast by a long press of 5s, and the blue light is on for 2s when it is connected back/on.  
 FN+3=BT 3 (device name BLE5.1 KB-3) .The key is a blue indicator, the blue light flashes fast when the channel is broadcast by a long press of 5s, and the blue light is on for 2s when it is connected back/on.  
 FN+4=wired mode, white light on key 4 for 2s, long press for 5s white light flashing fast to code  
 FN+Shift-R=Switching sidelight mode, FN+ Alt-R=Switching side light brightness, FN+Ctrl-R=Switching side light speed, FN+/? = Light switch between seven colours (breathing and constant light modes)  
 Fn+Esc long press for three seconds = restore default. The saving of the originally connected Bluetooth device will not be cleared.  
 Fn+|=light brightness+ , Fn+|=light brightness- , Fn+←=speed- , Fn+→=speed+.  
 FN+Q=Android, FN+W=Windows, FN+E=Mac, FN+R=IOS.  
 4 separate indicators from top to bottom: Num indicator/CAP case indicator/Charge indicator/Lock WIN indicator.  
 Fn+TAB=Switching light effect colours  
 Fn+WIN-L=Lock/Open WIN-L window key (Lock WIN indicator is always on when lock WIN, in WIN system).  
 Switch to Mac/IOS system and switch the WIN-L/ALT-L position (without locking WIN).

The low voltage charging indication flashes to indicate that the blue light is always on when charging and goes off when fully charged.  
 Press and hold FN to indicate the current mode, the corresponding keys are lit, release to restore the light effect.  
 BT/2.4G mode for one minute without any operation automatically into the power-saving mode, click the key to wake up the keyboard, check the keyboard power connected to the BT can be displayed on the computer.  
 Keyboard patch needs to be switched to wired mode, re-plug the keyboard cable after brushing and re-switch the switch on the top left corner of the keyboard

**Charging instructions**

1. It is recommended to use only the computer USB port to charge the keyboard.
2. Please do not use fast-charging mobile phone chargers to charge the keyboard.
3. Please do not use inferior non-standard power adapter to charge the keyboard.
4. Please do not use over-voltage and over-current power adapter to charge the keyboard.
5. When charging, please keep away from high temperature equipment.
6. The indicator light is on when charging, the indicator light is off when fully charged.
7. Please turn off the power switch when not in use for a long time.

The above charging instructions also apply to other devices with charging capabilities (keyboard/mouse/headphones/speakers, etc.)

# 说明书技术要求:

1.成品尺寸:80x95mm

2.材质:128g铜版纸

3.工艺:风琴折(正反印刷)

