




F98Pro V3

Mechanical Keyboard

Keyboard Function Description

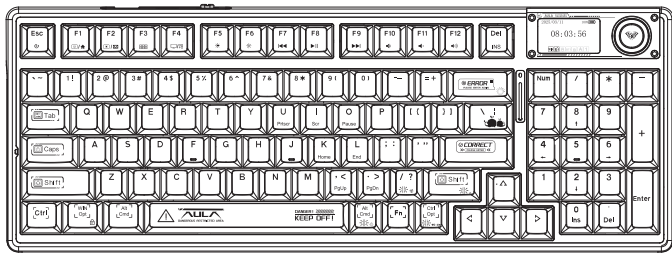

1. Fashionable exterior design, Gasket structure, delicate and soft touch.
2. Humanized keyboard design, combined with Fn to add a series of commonly used shortcut function keys.
3. Keycaps (optional) and mechanical switches (optional) can be plugged, and users can also purchase various brands of switches and personalized keycaps on the market for free DIY.
4. The keyboard is made of solid materials and has sensitive key response.
5. The upper right corner of the keyboard is equipped with a 1.14-inch TFT display screen, which has various functions and can be used with DIY drivers. The knob and buttons in the upper right corner of the keyboard can be used with the TFT screen to rotate and adjust the menu. Short press the knob to confirm and return to the previous menu.
6. The keyboard TFT screen displays the battery life, making it easy to see the charging and remaining battery levels at a glance.
7. Keyboard return rate: wired mode 1000Hz, 2.4G mode 1000Hz, Bluetooth mode 125Hz.
8. Independent battery compartment, equipped with two 5000mAh large capacity lithium batteries for cyclic charging, with power switch, environmentally friendly and energy-saving, worry free and cost-effective. effectively extending battery life.
9. Type-C connectivity is more reliable, performance is more stable, and charging is faster.


BT Connection Instructions

02

1. Rotate the knob to BT mode (BT:AULA-F98Pro V3-1)



2. Press FN+1 and screen displays "BT1 linking" then long press and hold for 5S, screen displays "BT1 Pairing"



3. Search for "AULA-F98Pro V3-1" on the device and click on the link.



4. The screen displays "BT1 Success!". Highlight the BT 1 icon corresponding to the main menu on the screen.

Note: Connect other BT channels and adjust the screen to BT1 (Fn+1) /BT2 (Fn+2)/BT3 (Fn+3) for switching. The corresponding icon on the main menu of the TFT screen will also be highlighted after successful connection.

2.4G Connection Instructions

03

1. Rotate the knob to 2.4G mode and screen display "2.4G Linking"



2. Insert the USB receiver for your device



3. The screen display "corresponding to the main menu on the screen The screen displays "2.4G Success! ", indicating successful pairing, Highlight the 2.4G icon corresponding to the main menu on the screen.

2.4G Pairing



1. Turn the mode switch to 2.4G mode, and the screen displays "2.4G Linking"

2. Long press FN+`~5S to display "2.4G Pairing" on the screen



3. Inserting the receiver screen displays '2.4G Success!', indicating successful pairing. Highlight the 2.4G icon corresponding to the main menu on the screen.

Note: Attention: When connecting to 2,4G, search first and then plug in the receiver. The factory default code has been matched.

Wired Connection Instructions

04

Turn the knob to wired USB mode, and the icon corresponding to the main menu on the screen will be highlighted.

Backlight effect adjustment

05

Scroll to the "Light Effects" mode on the TFT screen, switch between 19 RGB light effects, and turn off a total of 20 light effects:


Adrift (Restore default rear light effects)	The path winds along mountain ridges	be touch-and-go	kill two birds with one stone	Ripple diffusion
a continuous flow	range upon range of mountains	light wind and drizzling rain	Shuttle back and forth	Static constant brightness
Single light up	Single extinction	was studded with stars	Flying snow all over the sky	Flowers are blooming
Dynamic respiration	Spectral cycle	Colorful spring surging	Colorful Vertical and Horizontal	OFF

Scroll to the "Effects" mode on the TFT screen to switch between 19 RGB lighting effects and turn off a total of 20 lighting effects

Scroll to the "Light Color" mode on the TFT screen to switch between RGB, red, orange, yellow, greencyan, blue, purple, and white.


Equipped with music and dynamic RGB lighting effects in conjunction with the driver.

The wired and 2.4G mode are combined to drive each key with custom functions and macro definitions ,can customize over 16 million colors.

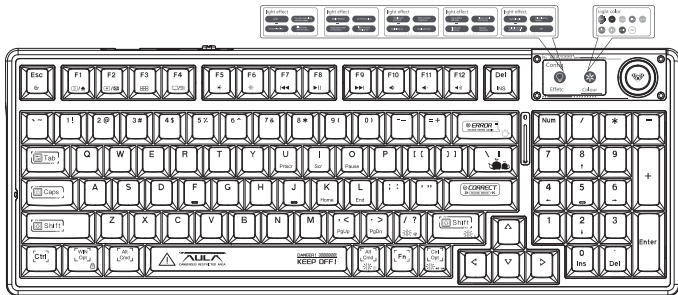


Backlight Effect Roller Adjustment

- Scroll to the "Light Brightness" mode on the TFT screen and switch to 5 levels of brightness, with each level being 20%. Rotate the knob clockwise to increase the brightness of the light, and counterclockwise to decrease the brightness of the light.
- Scroll to the "Light Speed" mode on the TFT screen and switch to 5 speed levels with each level being 20%. Rotate the knob clockwise to increase the light speed, and counterclockwise to decrease the light speed.

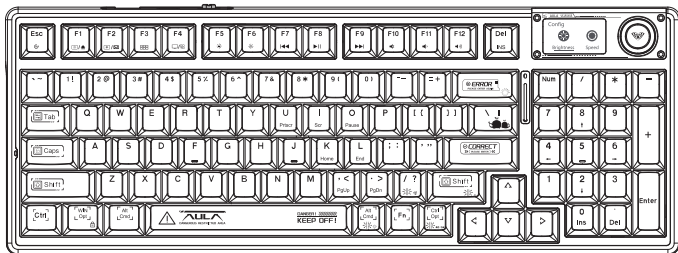


- Scroll to the "Volume Adjustment" mode on the TFT screen to increase the volume clockwise and decrease the volume counterclockwise, and the corresponding volume icon will flash.
- Scroll to the "Language Selection" mode on the TFT screen to switch between Chinese and English.

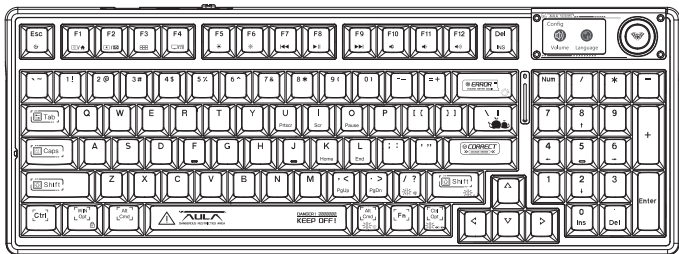




Front Side Decorative Light Adjustment

06

Side light strip light adjustment




Atmosphere lighting adjustment



Operating System Mode Switching

- On the TFT screen, enter "System Switching", where there are four systems to choose from: "WIN", "MAC", "IOS", and "Android".

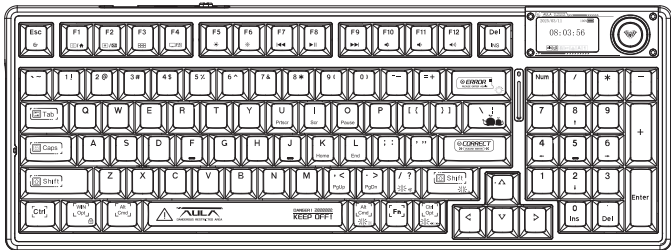

Switch to Mac/iOS system and switch button positions (non lock WIN as shown in the table below):

WIN/Android	Left WIN	Left ALT	Right ALT
Mac/iOS	Left Option	Left Command	Right Command

Operating System Mode Switching

+	Restore Default	+	Lock WIN	+	INS
+	Prtscr	+	Scr	+	PGDN
+	END	+	PGUP		
+	R. G, B color test	+	Pause		
+	Turn on/off the screen	+	HOME		

The Android system F zone single press function and F zone FN combination function.

Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3	Convert Window	F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12

Windows system Fzone single press function and Fzone FN combination function.

Key position	Single press	Fn combination
F1	F1	Home
F2	F2	mail
F3	F3	Convert Window
F4	F4	open Resource Manager
F5	F5	Main backlight brightness-
F6	F6	Main backlight brightness+

Key position	Single press	Fn combination
F7	F7	Previous song
F8	F8	play/pause
F9	F9	Next song
F10	F10	mute
F11	F11	Volume-
F12	F12	Volume+

Mac system F zone single press function and F zone FN combination function.

Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3	Convert Window	F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12

The IOS system F zone single press function and F zone FN combination function.


Key position	Single press	Fn combination
F1	Screen brightness-	F1
F2	Screen brightness+	F2
F3		F3
F4	Return to desktop	F4
F5	Main backlight brightness-	F5
F6	Main backlight brightness+	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	play/pause	F8
F9	Next song	F9
F10	mute	F10
F11	Volume-	F11
F12	Volume+	F12


Shortcut Key Description



- In Bluetooth/2.4G mode, after 5 minutes of inactivity, the keyboard automatically enters power-saving mode. Click the button to wake up the keyboard.

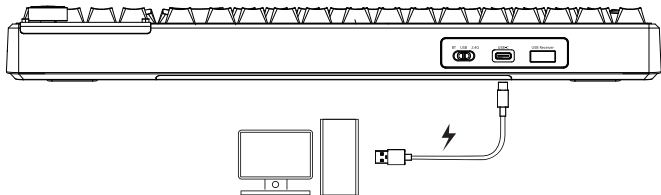

- Connect the keyboard to the computer through the equipped USB cable to charge the keyboard.

 <p>Charging instructions</p>	<ol style="list-style-type: none">1. It is recommended to use only the computer USB port to charge the keyboard.2. Do not use fast-charging cell phone chargers to charge the keyboard.3. Do not use inferior non-standard power adapter to charge the keyboard.4. Do not use over-voltage and over-current power adapter to charge the keyboard.5. Please keep away from high temperature equipment when charging6. Please turn off the power switch if it is not used for a long time. <p>The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)</p>
--	--



FN key multifunctional

- Number of keys: 95
- Product size: 386.95x141.92x44.32 +0.1mm
- Product weight: Approximately 1240g (10000mAh battery capacity)
Approximately 1228g (8000mAh battery capacity)
- Charging voltage/Current: DC 5V--1200mA
- Rated voltage: DC 3.7V (Fully charged 4.2V)
- Rated current: Approximately 140mA @ 3.7V (Default light effect)

Approximately 45mA (Backlight off)

- Charging interface: Type-C interface

Battery life: ≥ 71 hours (default light effect)222 hours (turn off backlight and light strip)

Battery capacity:5000mAh rechargeable lithium batteryCharging *2

Interface: Type-C interface

Computer system requirements:

Wired/2.4G mode: Windows ALL operating system WIN XP, WIN7, WIN8, WIN10 (drivers may be required in Win95, Win98 systems).

BT mode: WIN8, WIN10 and above systems.

BT mode: MAC computer with BT BLE 4.0, BLE 5.0 and above hardware,Android phone or tablet, IOS phone or tablet.

Hardware connection: Wired mode/2.4G receiver: configured with USB 1.1 or above ports.

The wired USB/2.4G receiver supports hot swapping (plug and play).Switch to the corresponding channel in Bluetooth mode, and connect to the BT terminal device to use it.



Dongguan Suoai Electronics CO.,LTD

www.aulastar.com

SOAI Industry Park, Huayu Street Changlong

Village Huangjiang Town Dongguan City

Guangdong Province

Execution Standard:GB/T 14081-2010

Made in China



Points de collecte sur www.quefairedemesdechets.fr

说明书技术要求:

- 1.成品尺寸:100x130mm
- 2.材质:120g铜版纸+打骑马钉
- 3.工艺:单黑双面印刷