
封面

F87 PRO V2

TRI-MODE FULL-SIZE MECHANICAL KEYBOARD


FUEL YOUR PASSION

Guida alle Combinazioni di Tasti FN e Funzioni

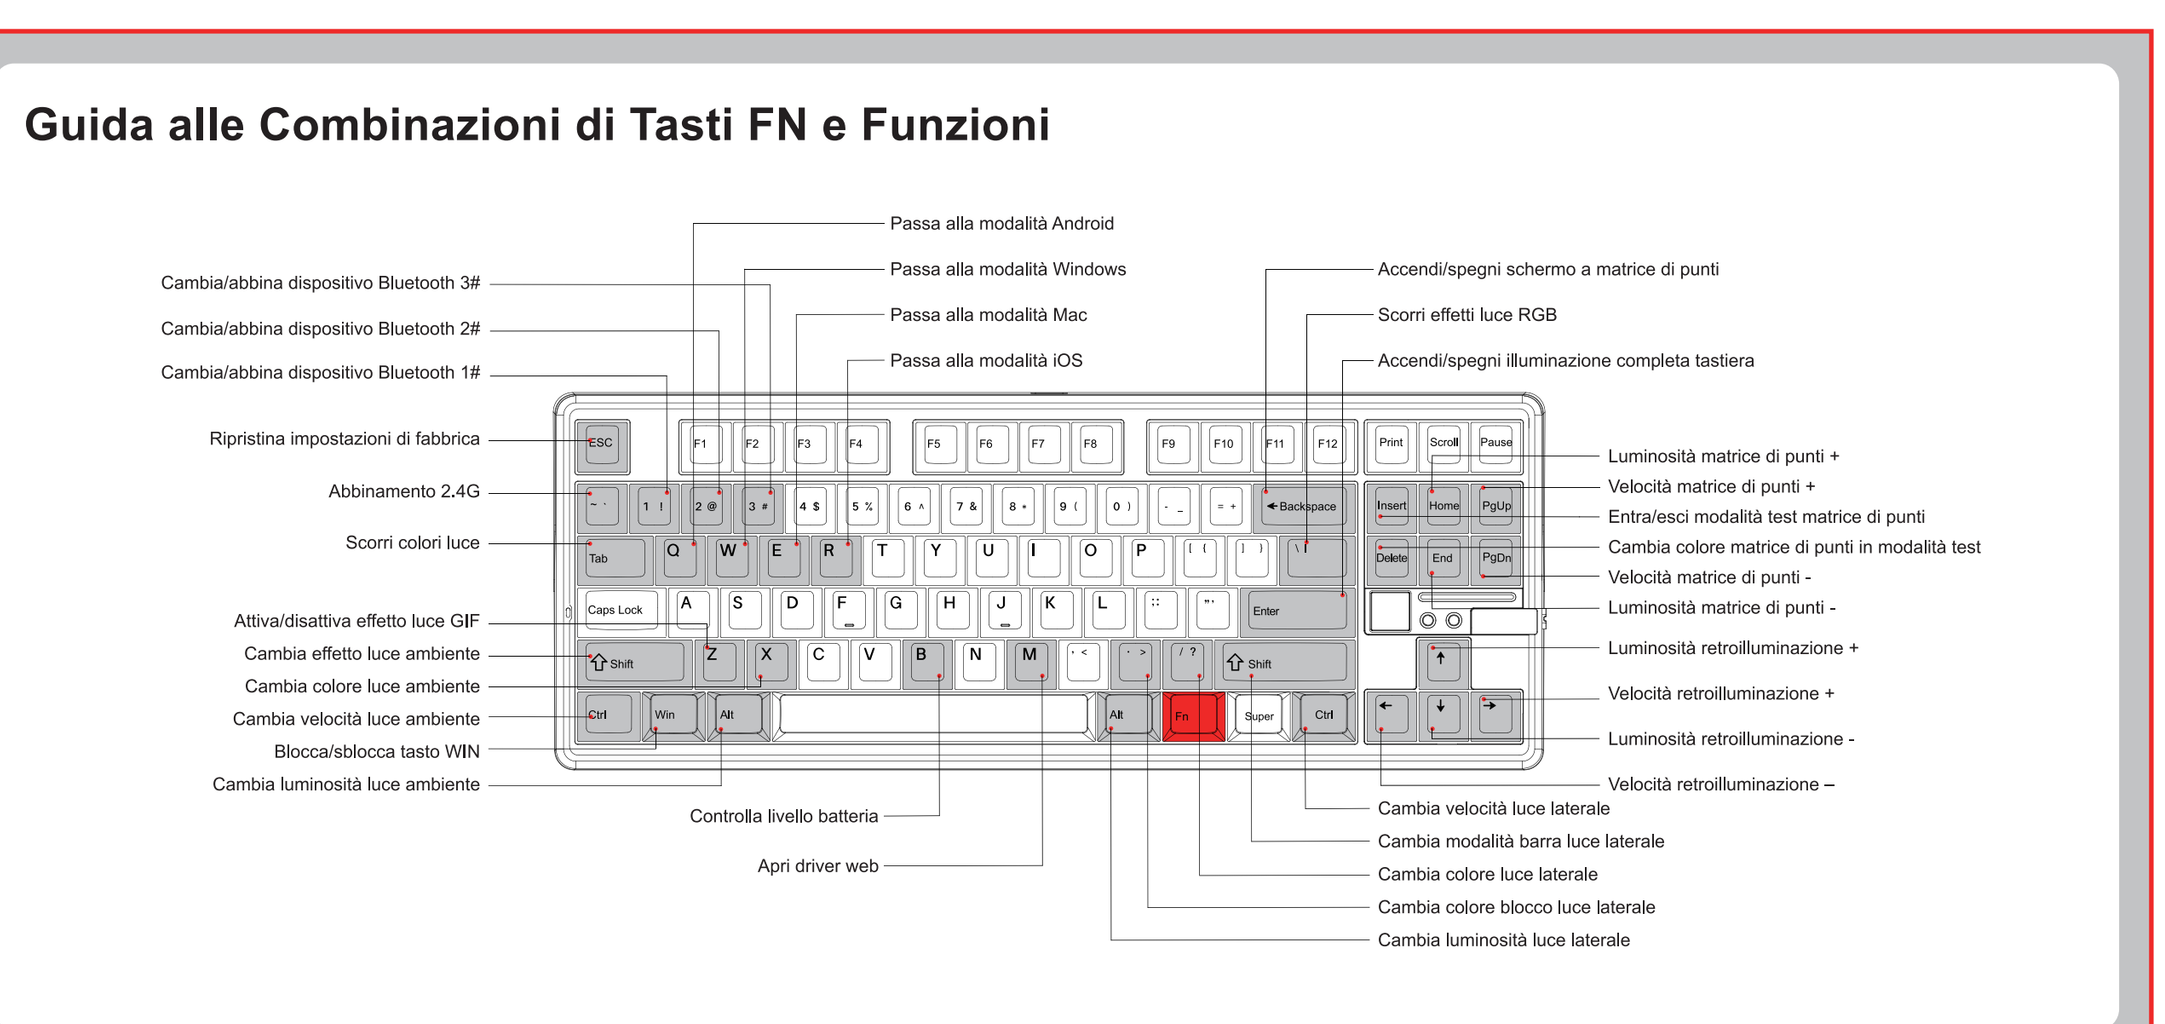

Product Specifications


- Number of keys: 87
- FN key: Multifunctional
- Product size: 362.47(L) x 137.96(W) x 41.72(H) +0.5 mm
- Product weight: Approx. 1089 g (excluding cable/receiver) / Approx. 1136 g (including cable/receiver)
- Rated voltage: DC 3.7 V (4.2 V when fully charged)
- Rated current: <160 mA @ 3.7 V (default light effect) / <17 mA (with lights off)
- Charging voltage/current: DC 5 V- 1500 mA
- Battery capacity: 10000 mAh rechargeable lithium battery
- Battery life: >75 h (default light effect) / >700 h (with lights off)
- Computer system requirements: Wired/2.4G mode: Windows ALL operating systems including WIN XP, WIN7, WIN8, WIN10 (Drivers may be required for WIN95 and WIN98)
  Wired mode/2.4G receiver: Requires USB 1.1 port or above
  BT mode: MAC computers, Android phones/tablets, iOS phones/tablets with BT3.0, BLE4.0, BLE5.0 and above hardware
- Hardware connection: Wired USB/2.4G receiver supports hot plugging (plug and play) Switch to the corresponding BT channel and pair with the BT device to use

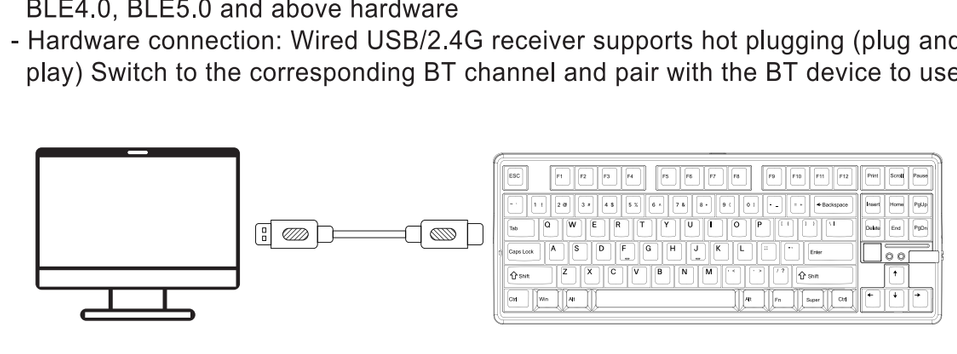

Product Introduction

- Fashionable exterior design, Gasket structure, delicate and soft touch.
- Humanized keyboard design, combined with Fn to add a series of commonly used shortcut function keys
- Keycaps (optional) and mechanical switches (optional) can be plugged in and unplugged, and users canalso purchase various brands of switches and personalized keycaps on the market for free DIY.
- The keyboard is made of solid materials and has sensitive key response.
- The right side of the keyboard is equipped with a 7 7 Matrix LED, which has various functions and can / be used with DIY drivers.
- Separate receiver storage compartment (the 8K version does not have a storage compartment).
- Keyboard polling rate: wired mode 8000Hz, 2.4G mode 1000Hz (8+8version: 8000Hz), BT mode 125Hz
- Built in 2 5000mAh large capacity lithium batteries for cyclic charging, with power switch, environmentally friendly and energy-saving, worry free and cost-effective, effectively extending battery life.
- Type C connectivity is more reliable, performance is more stable, and charging is faster.

FN Tuş Kombinasyonları Fonksiyon Kılavuzu

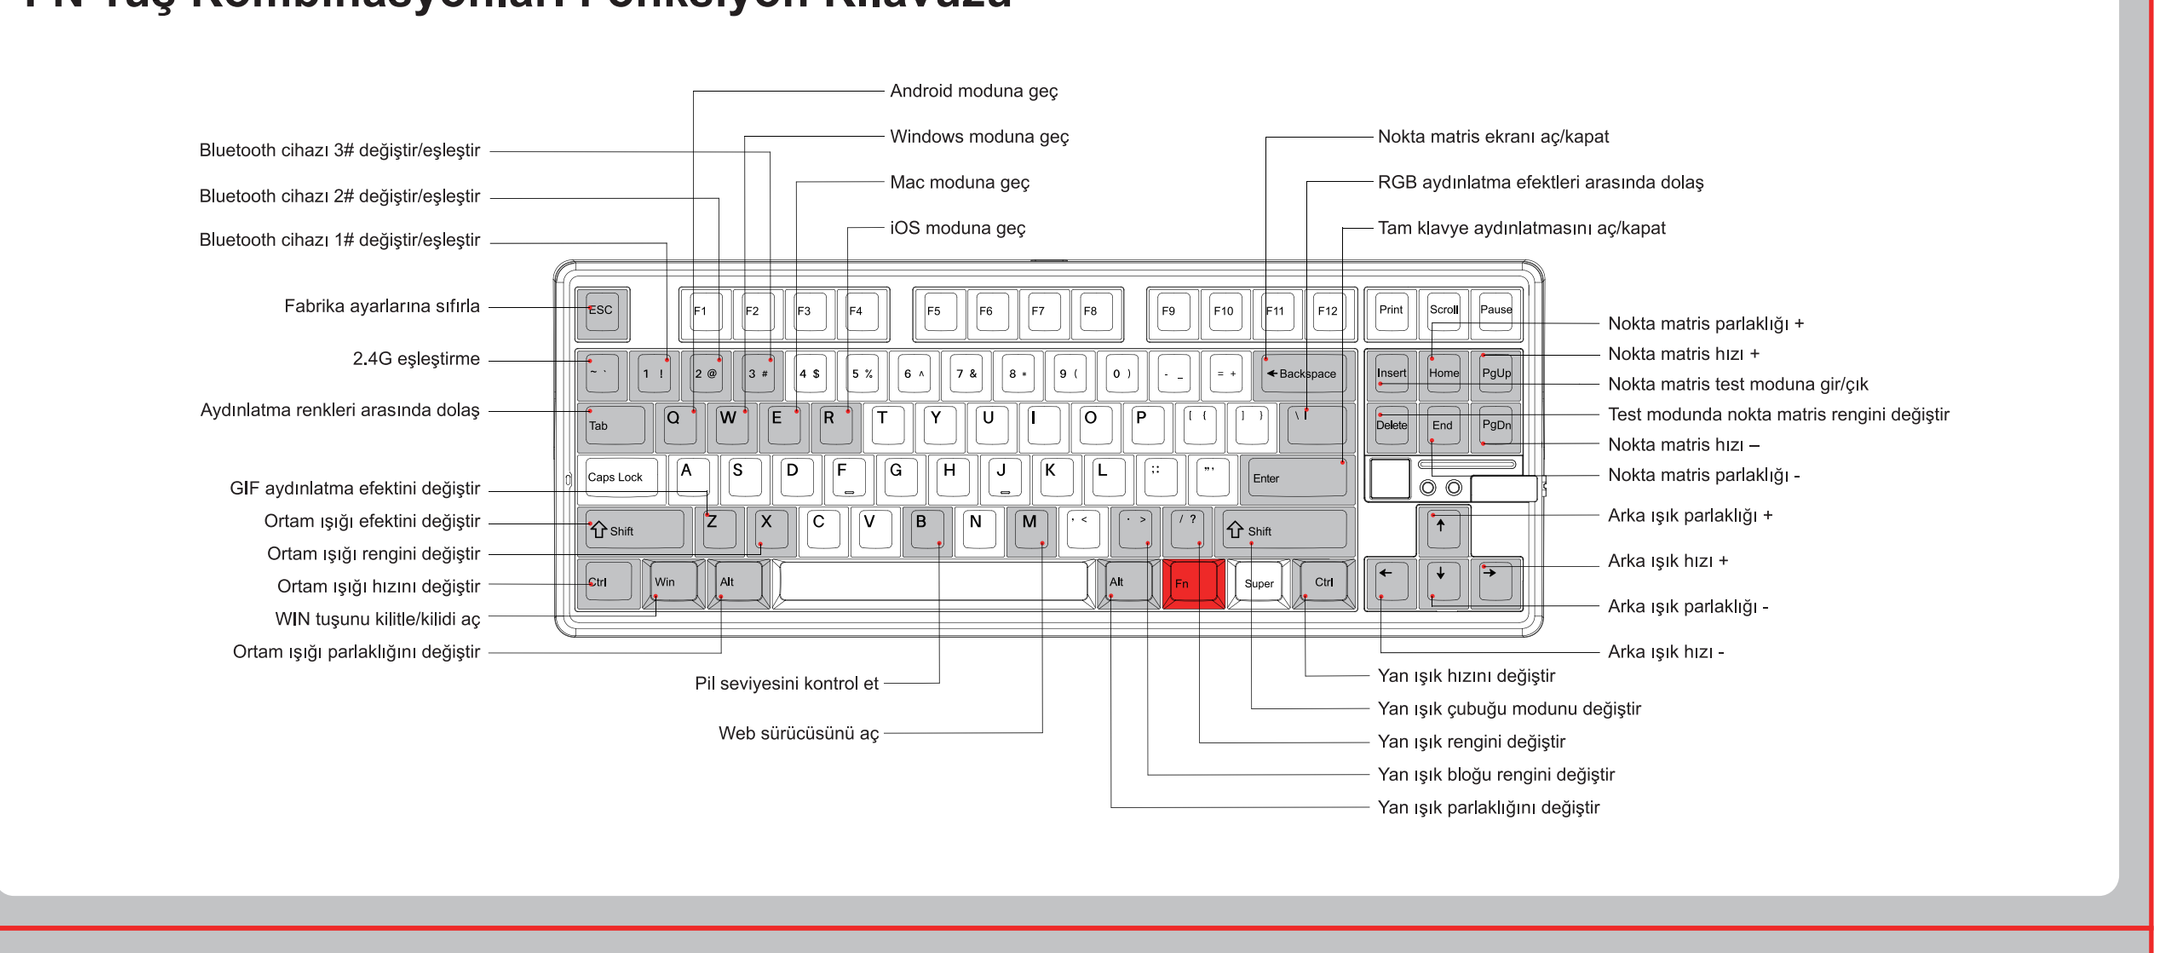

Please visit the AULA official website to download the driver to use this product.

The AULA HUB software provides a customizable user experience.
Please use the AULA HUB web-based driver to access this feature.

www.aulastar.com

This application is used to perform the following functions:

- tomize key assignments and FN layers
- Factory reset
- Adjust lighting colors and effects
- Firmware upgrade
- Performance tuning
- Macro programming
- Custom Dot Matrix Screen GIF Animation

Руководство по комбинациям клавиш FN




BT Connection Instructions



•Long press FN+1! /2@/3# to switch AULA-F87Pro V2D-1/2/3. When the blue indicator channel broadcasts, the blue light will flash and the blue light will light up for 2s when reconnecting/connecting


1.After holding down FN, it will prompt that the current 3 mode, BT 3 channel, and 4 system corresponding buttons are all lit with white lights. Release to restore the light effect.
2.After restoring the default settings, the previously connected BT device will not be cleared.

2.4G Connection Instructions

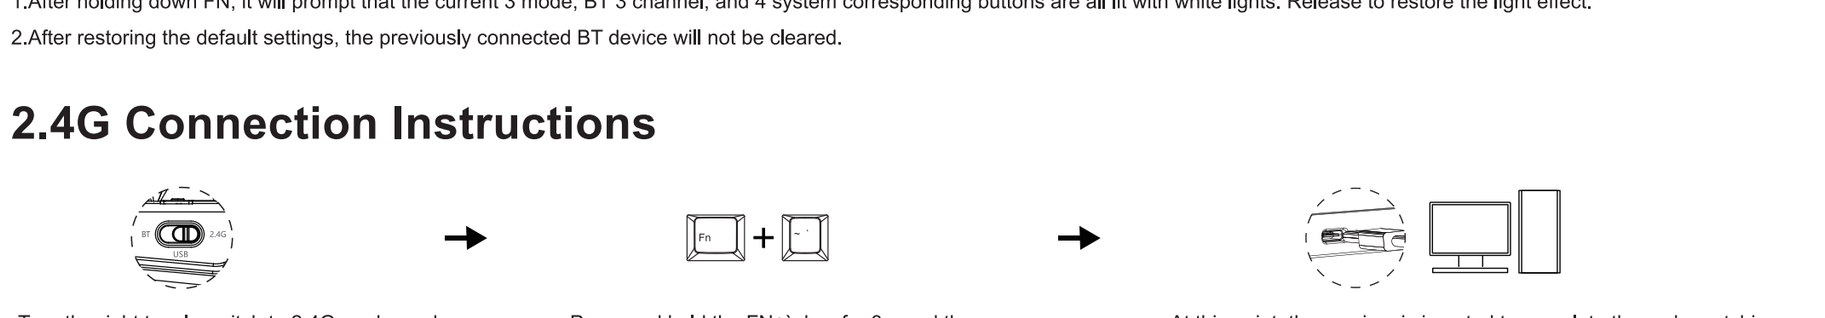


Attention: When connecting to 2.4G, search first and then plug in the receiver.
The factory default code has been matched.

คู่มือการรวมปุ่ม FN และฟังก์ชัน

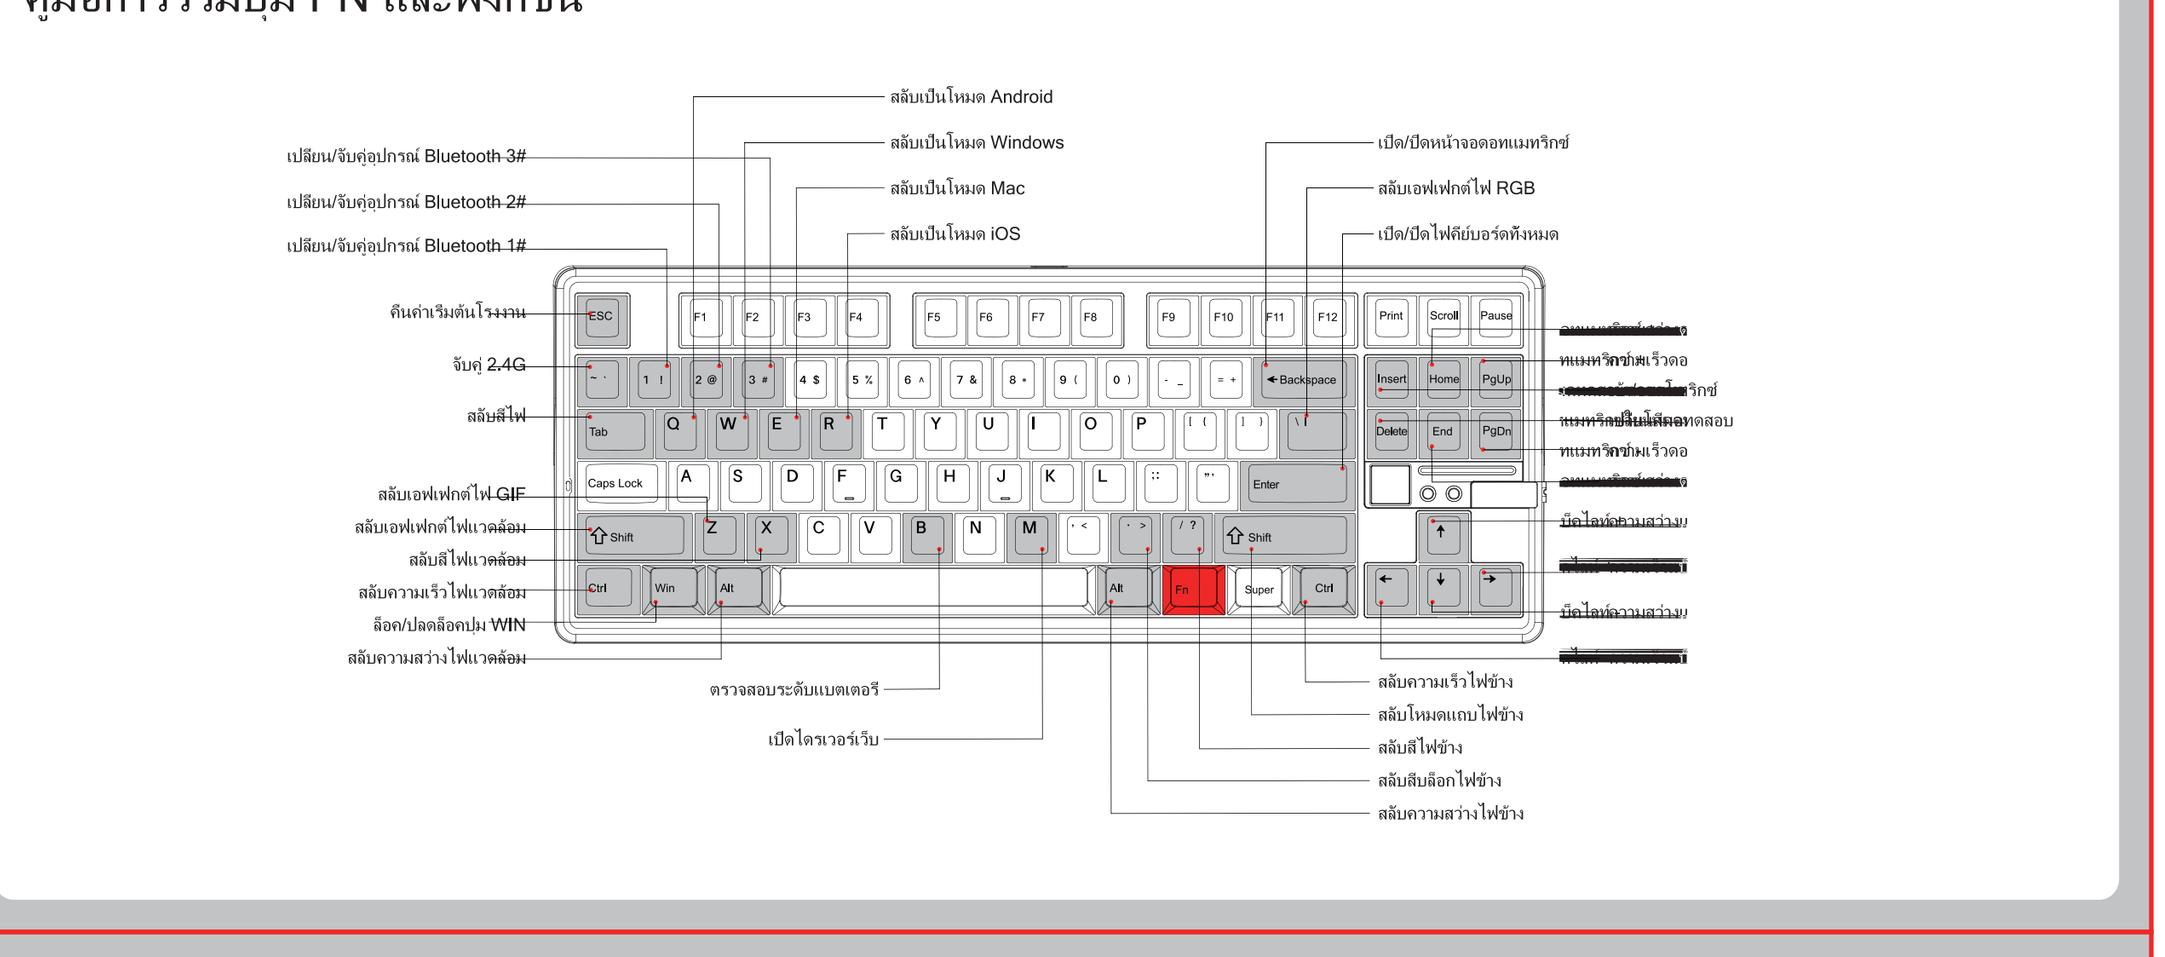

Charging Instructions

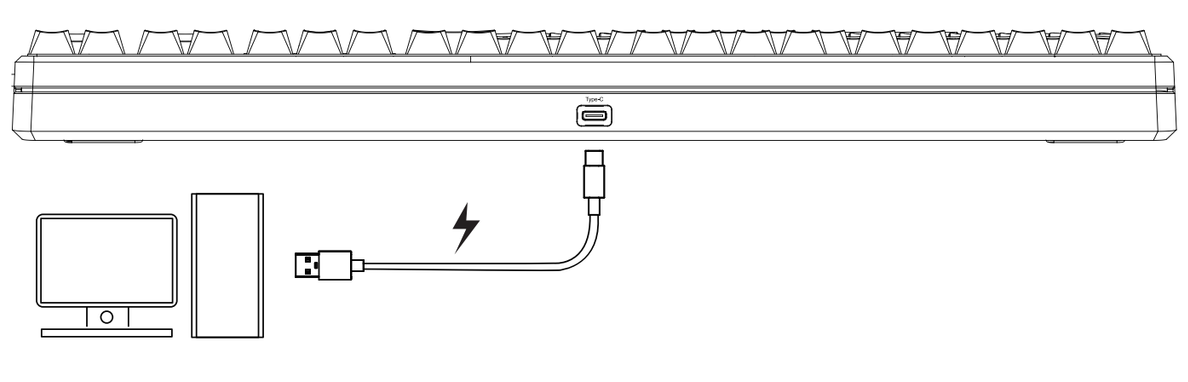

Fn + B Check battery level (When disconnecting the USB cable)


- Fn+B: Check the atmosphere light bar to see the remaining battery level. The five green atmosphere lights from left to right represent 20%, 40%, 60%, 80%, and 100% battery level respectively (with 20% in red).
- When the keyboard battery is too low, the red ambient light flashes. (After connecting Bluetooth on the computer, you can also check the battery level.)
- When the keyboard is charged, the ambient light flashes green from left to right, and enters the current setting light effect after being fully charged.

Charging instructions

1. It is recommended to use only the computer USB port to charge the keyboard.
2. Do not use fast-charging cell phone chargers to charge the keyboard.
3. Do not use inferior non-standard power adapter to charge the keyboard.
4.Do not use over-voltage and over-current power adapter to charge the keyboard.
5.Please keep away from high temperature equipment when charging
6. Please turn off the power switch if it is not used for a long time.


The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)


Guide des combinaisons de touches FN et fonctions

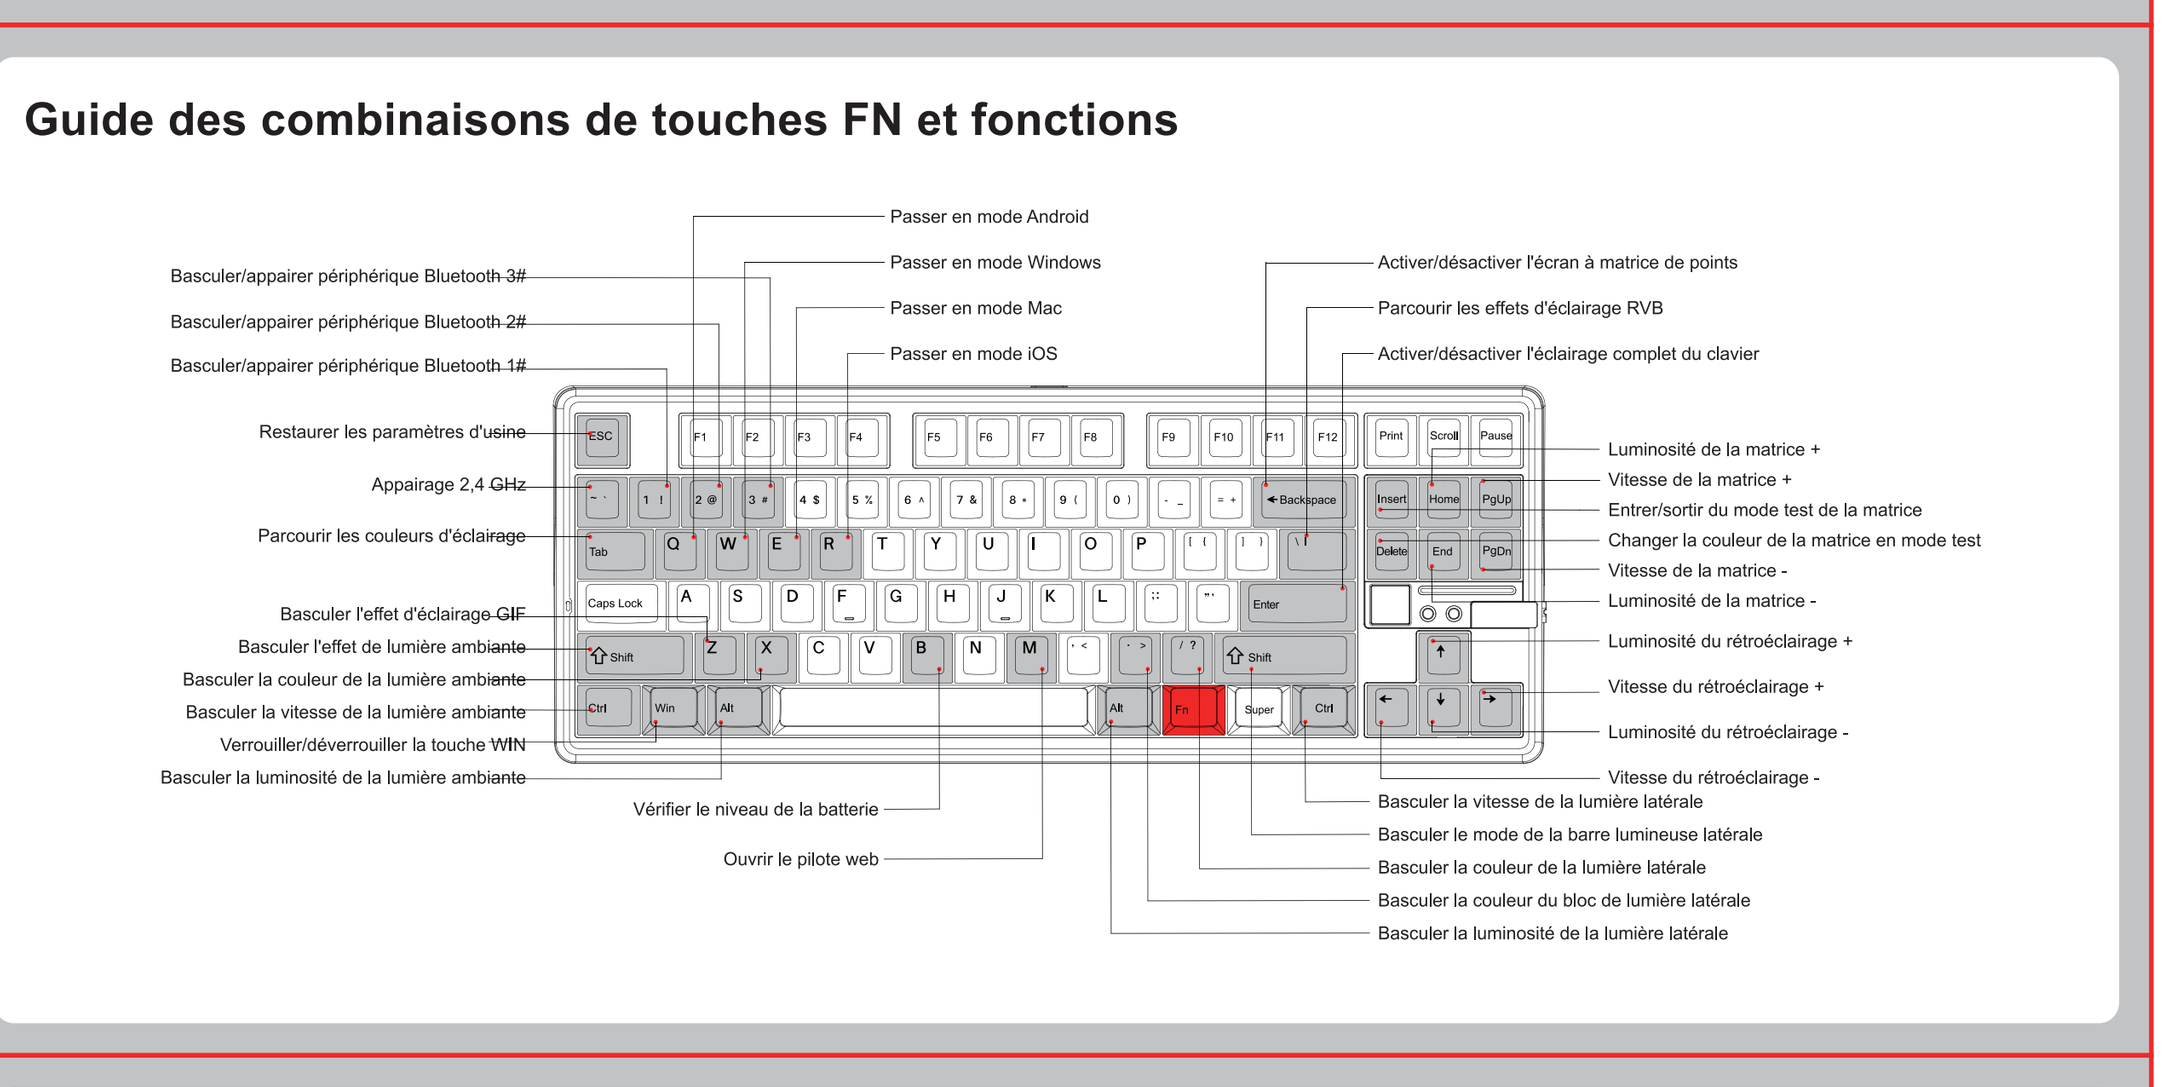


Matrix LED

- Press and hold button ① for 3s to enter multimedia mode. At this point, the volume icon will be displayed on the screen. Press button ① to increase the volume, then press button ② to increase the volume. After pressing, the corresponding animation response will appear.
- Press and hold the ② key for 3s to enter the light brightness adjustment mode. Press and hold the ① key for brightness - or the ② key for brightness+, but there will be no animation response.
- ① +② Simultaneously press to restore to default mode (key mode), and press the ① key to switch between key mode, animation mode, and pickup light mode on the dot matrix screen. Press the ② key to switch between 5 ambient lighting effects: constant light, off, flowing light (default), neon light, and breathing light (in button mode and pickup light mode), and switch animation in animation mode.
- There are 15 preset animations in the dot matrix screen animation mode at the factory.

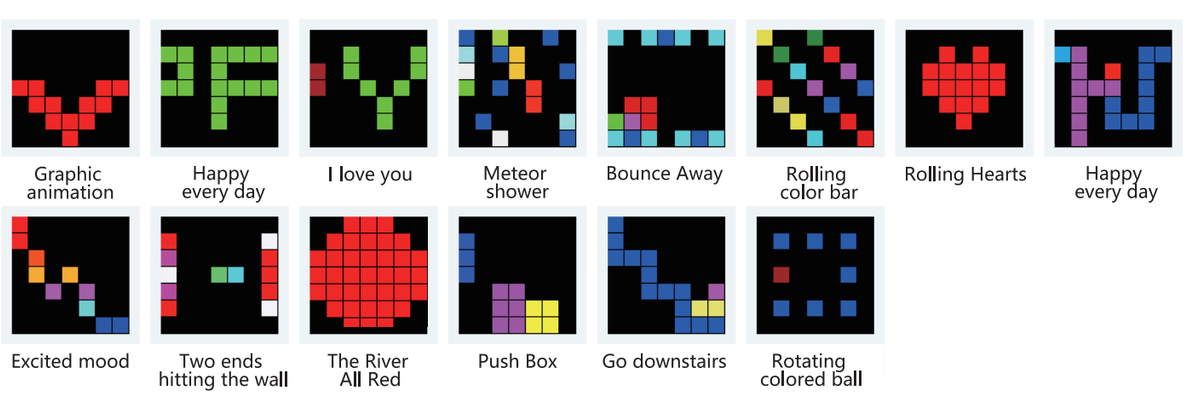





Посібник із комбінацій клавіш FN

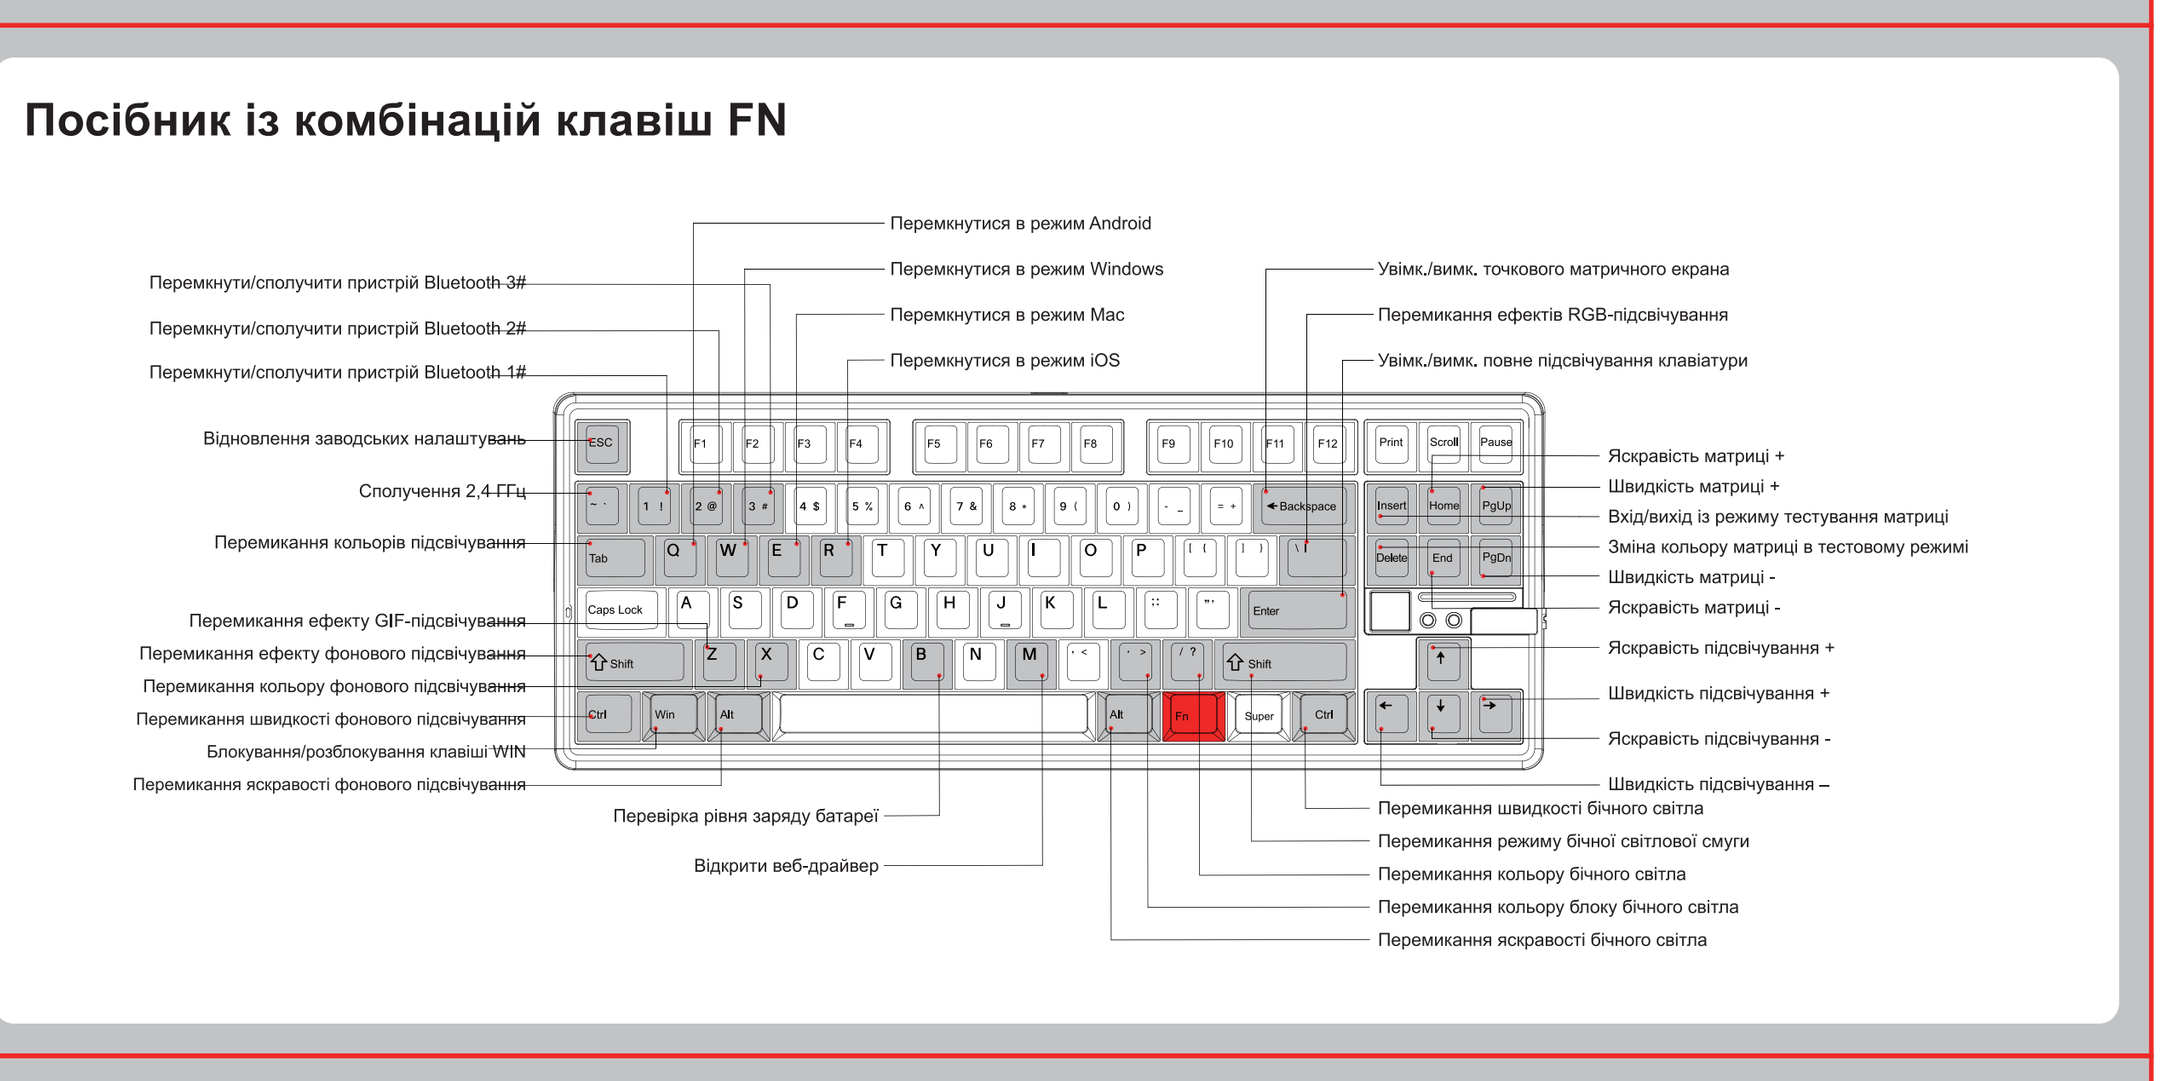


FN Key Combination Function Guide

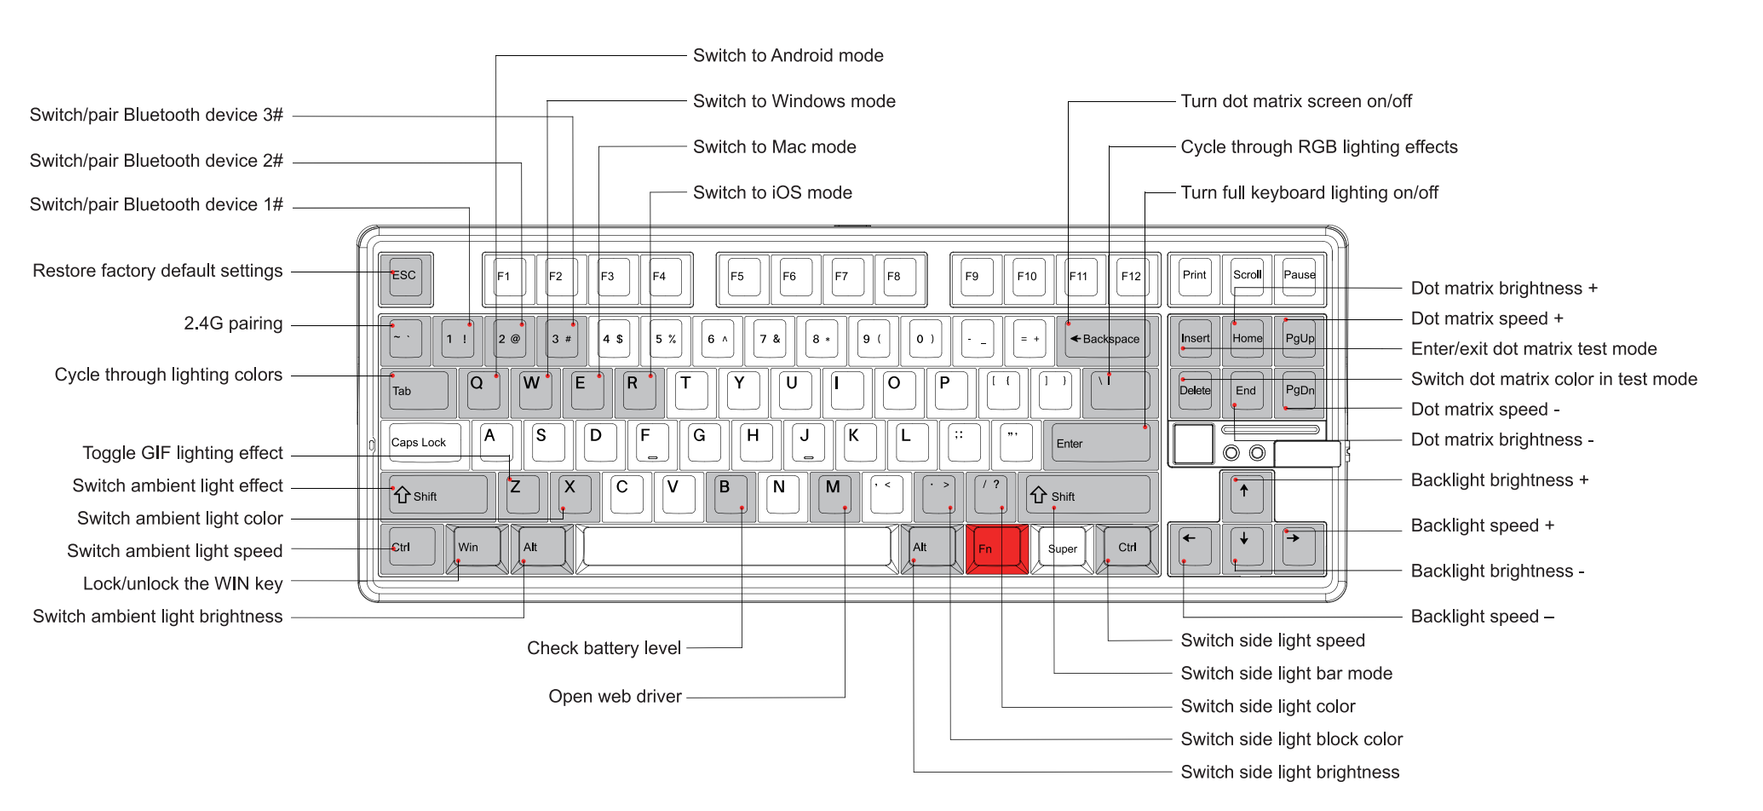


Panduan Kombinasi Tombol FN dan Fungsi

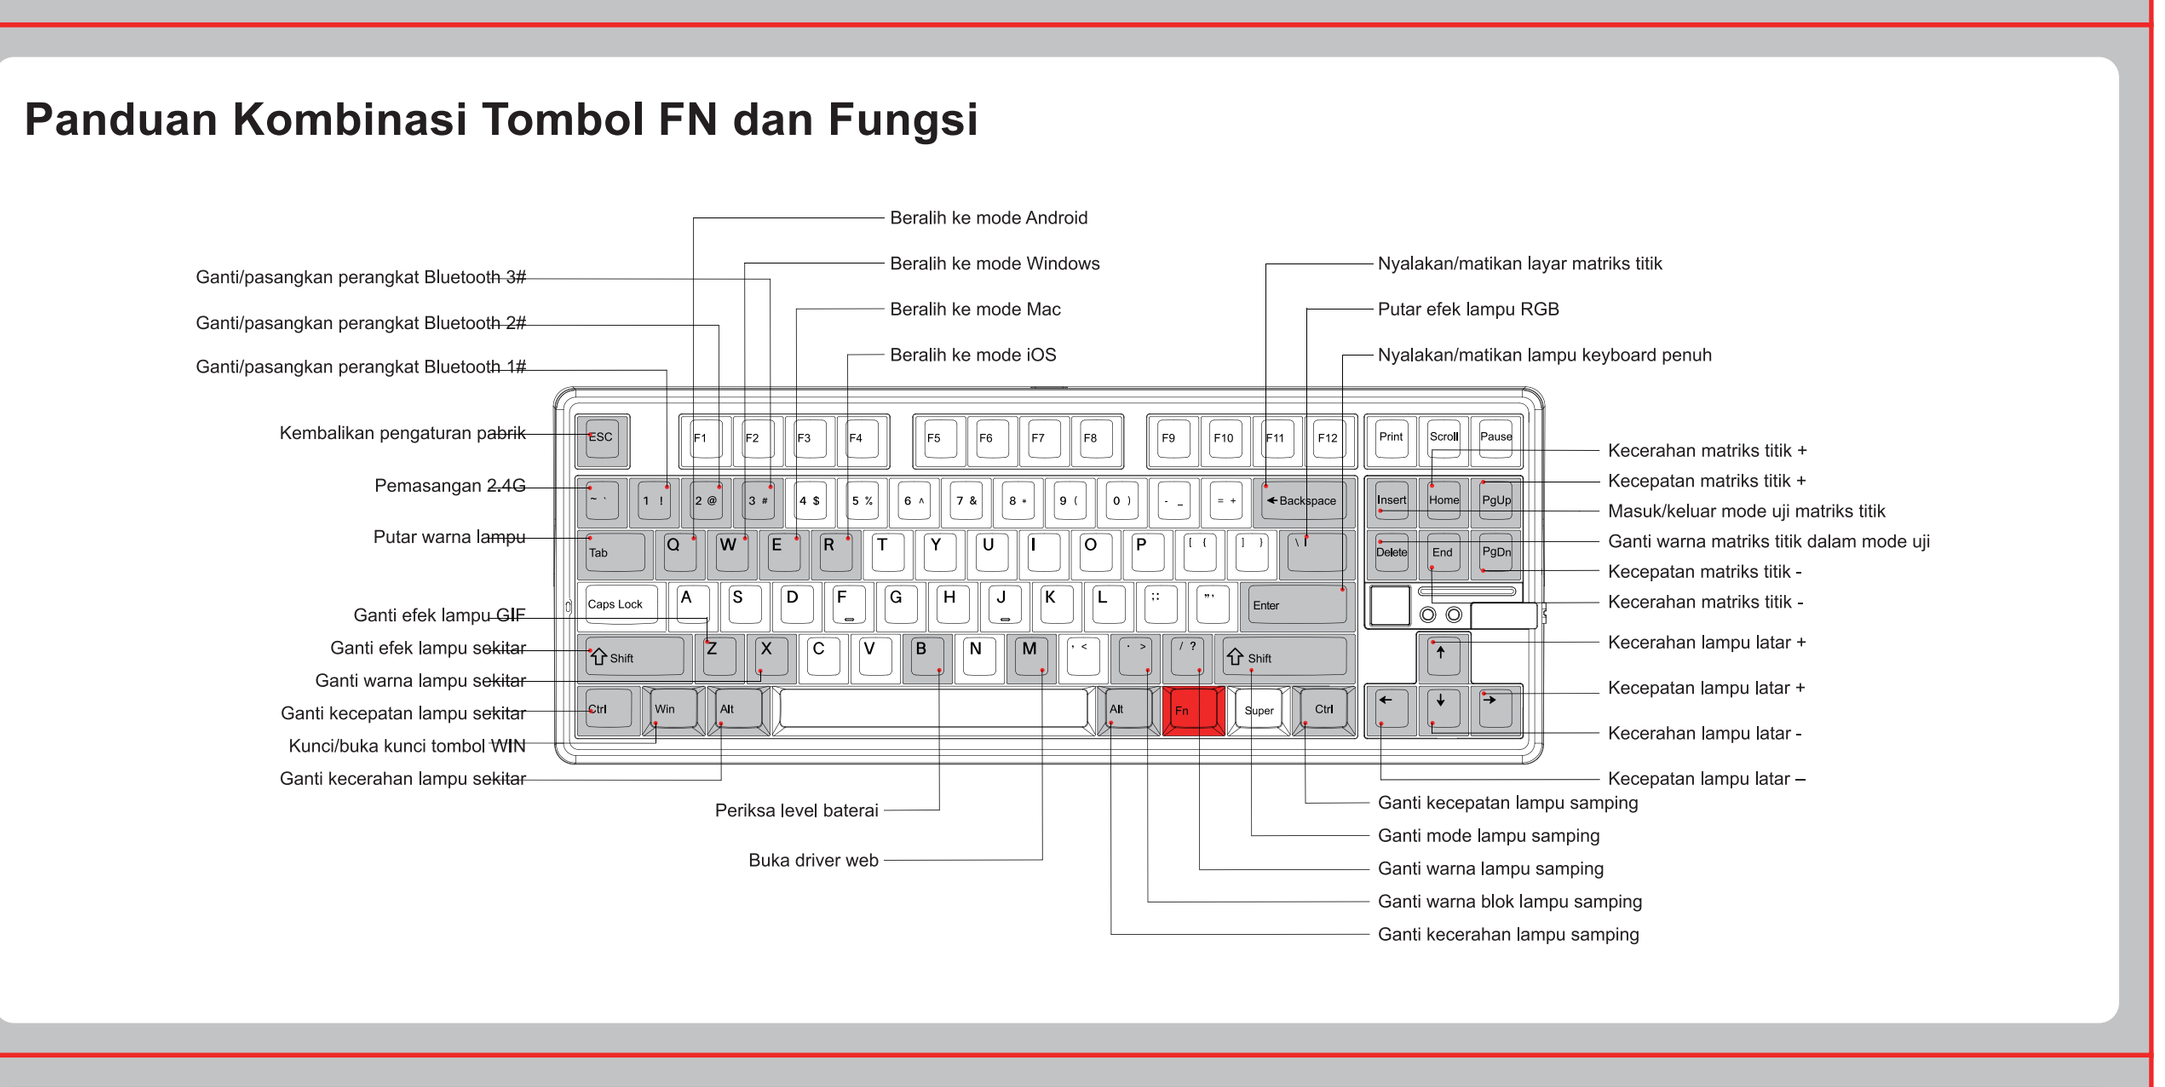


FN 키 조합 기능 안내

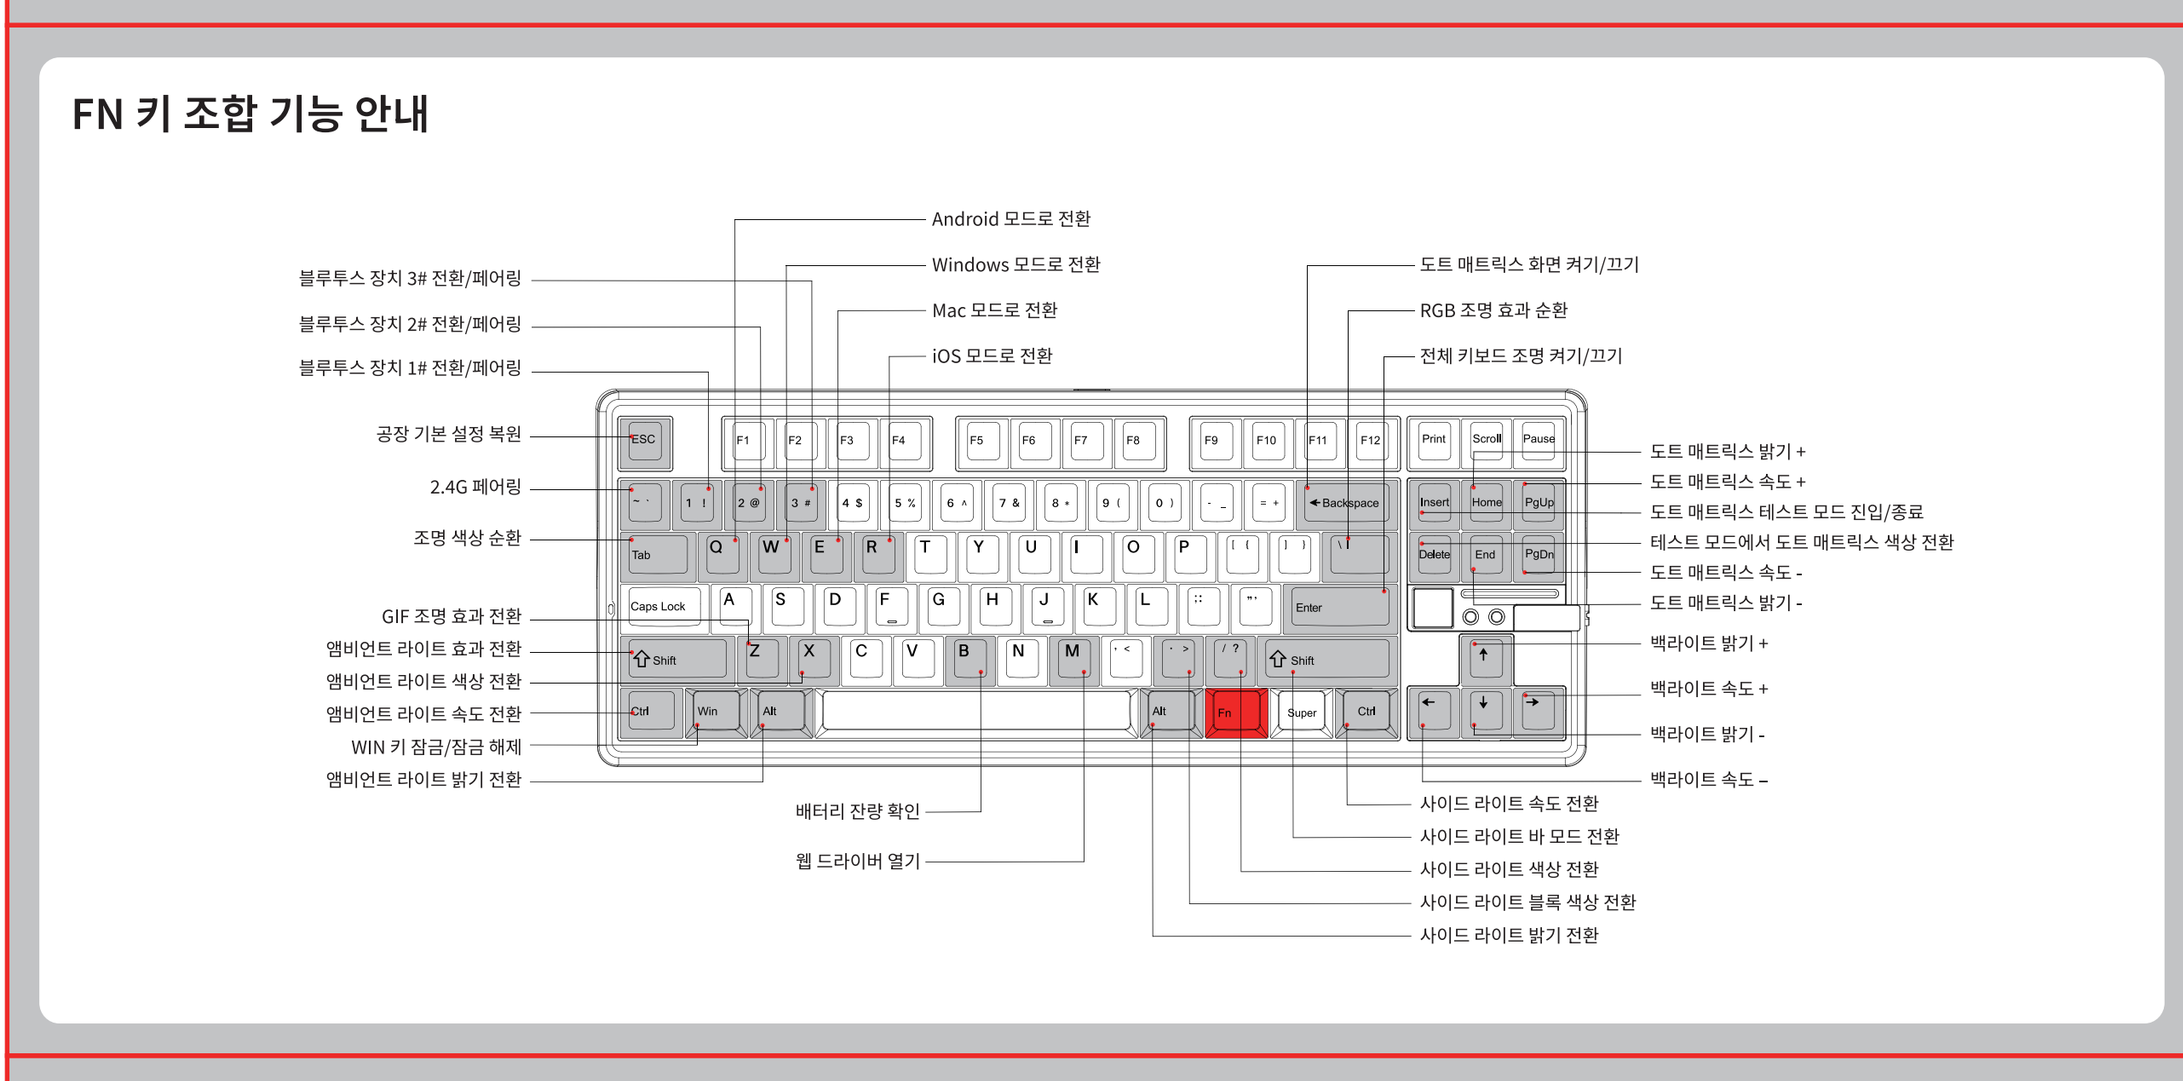


FNキーコンビネーション機能ガイド

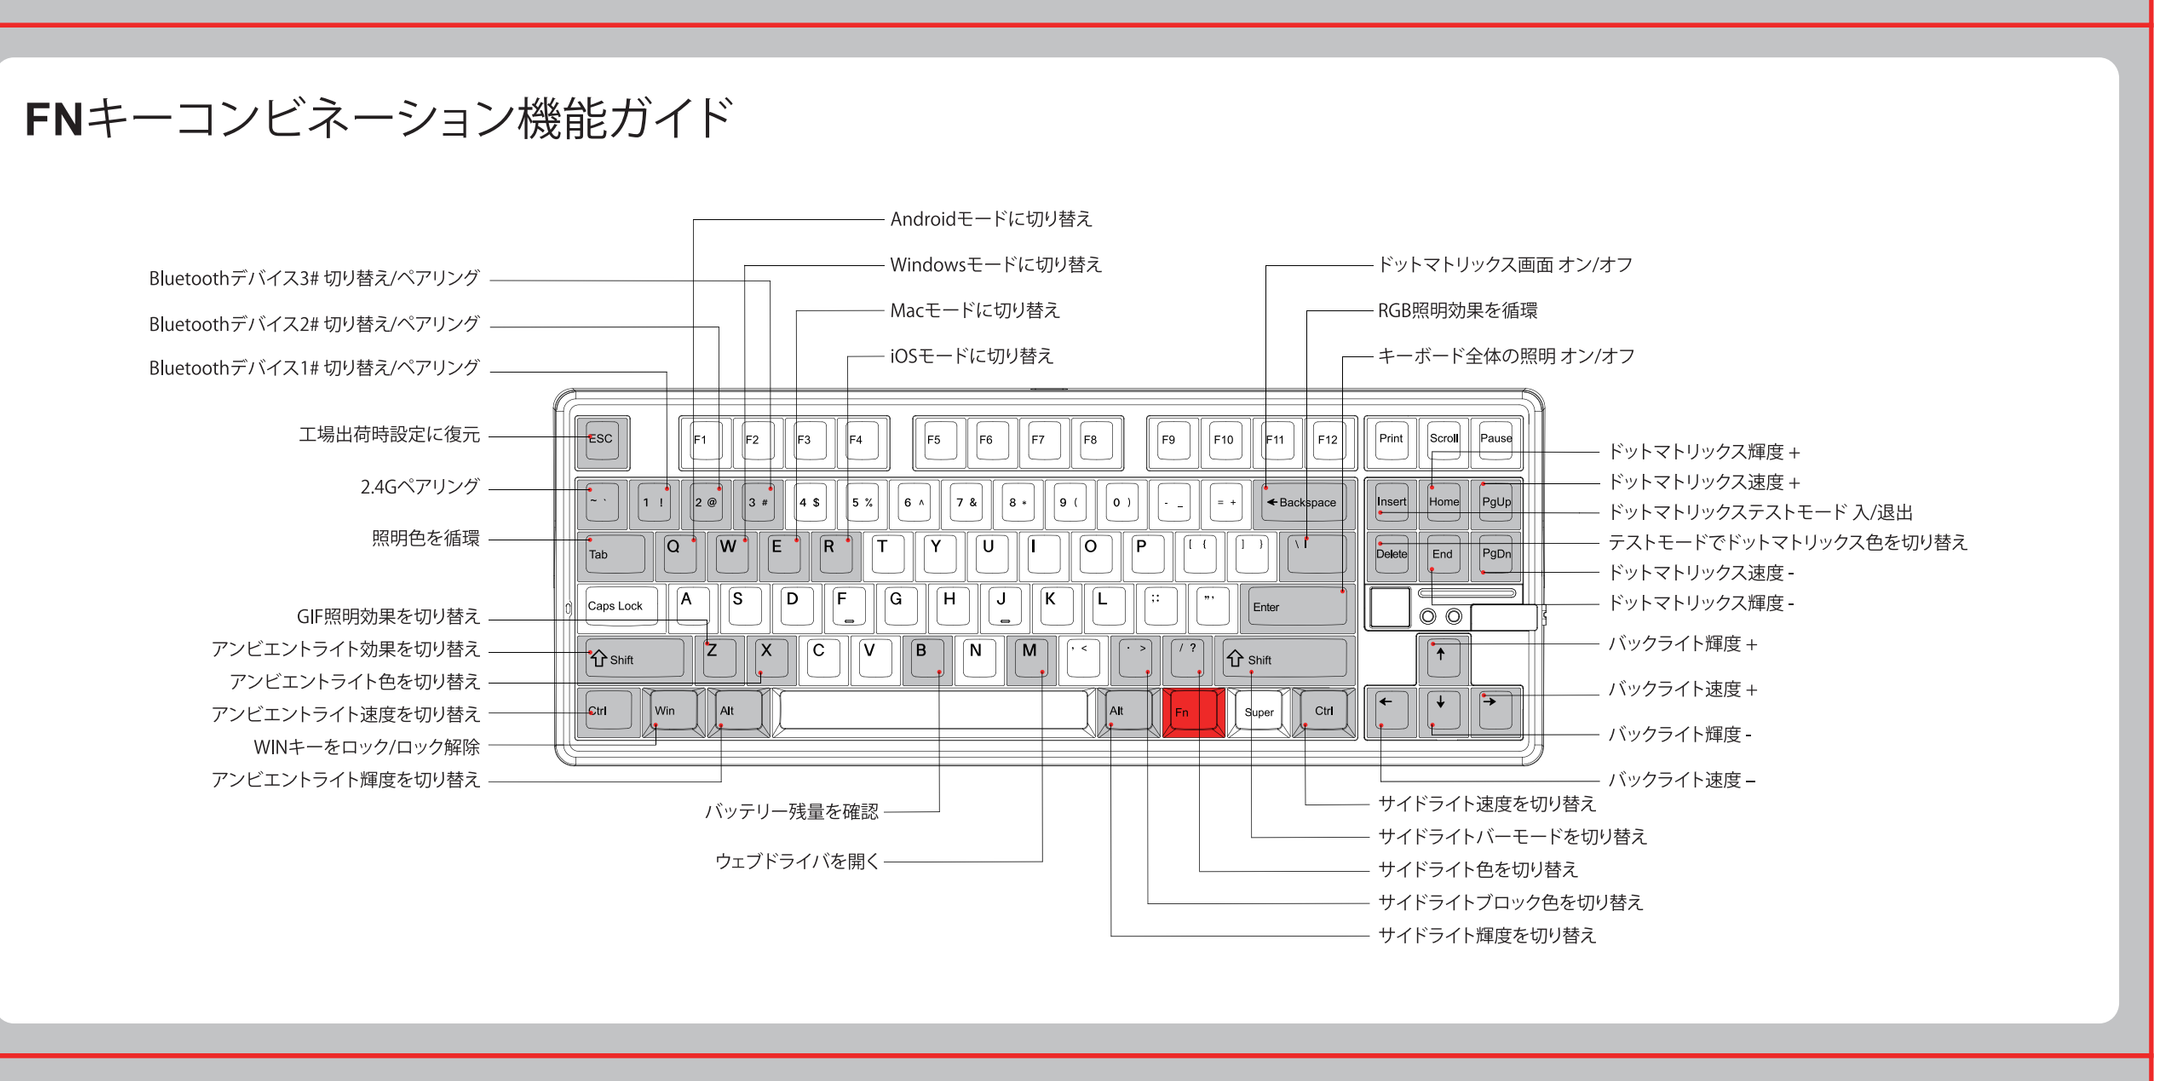


Guia de Combinações de Teclas FN e Funções

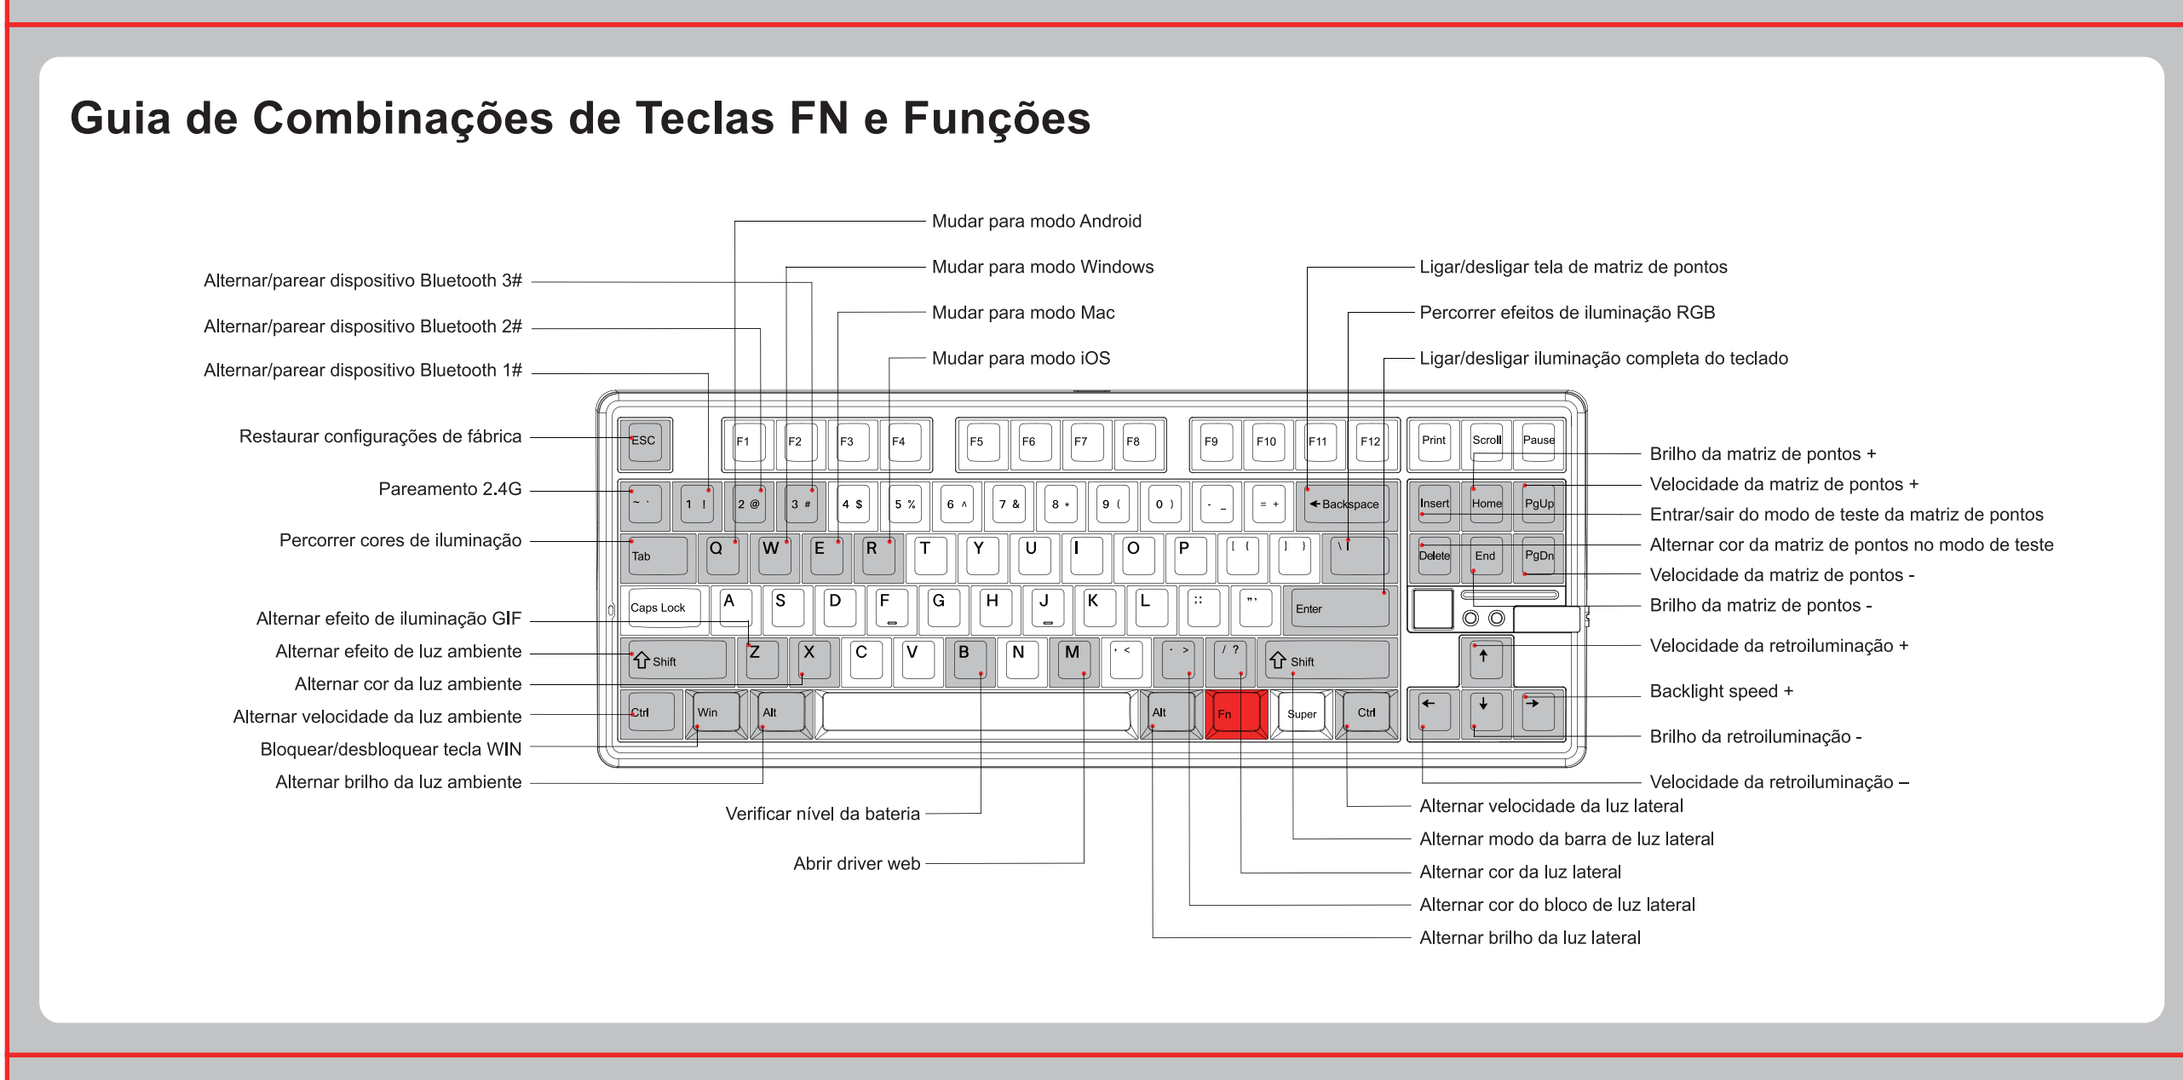


FN 組合鍵功能指南

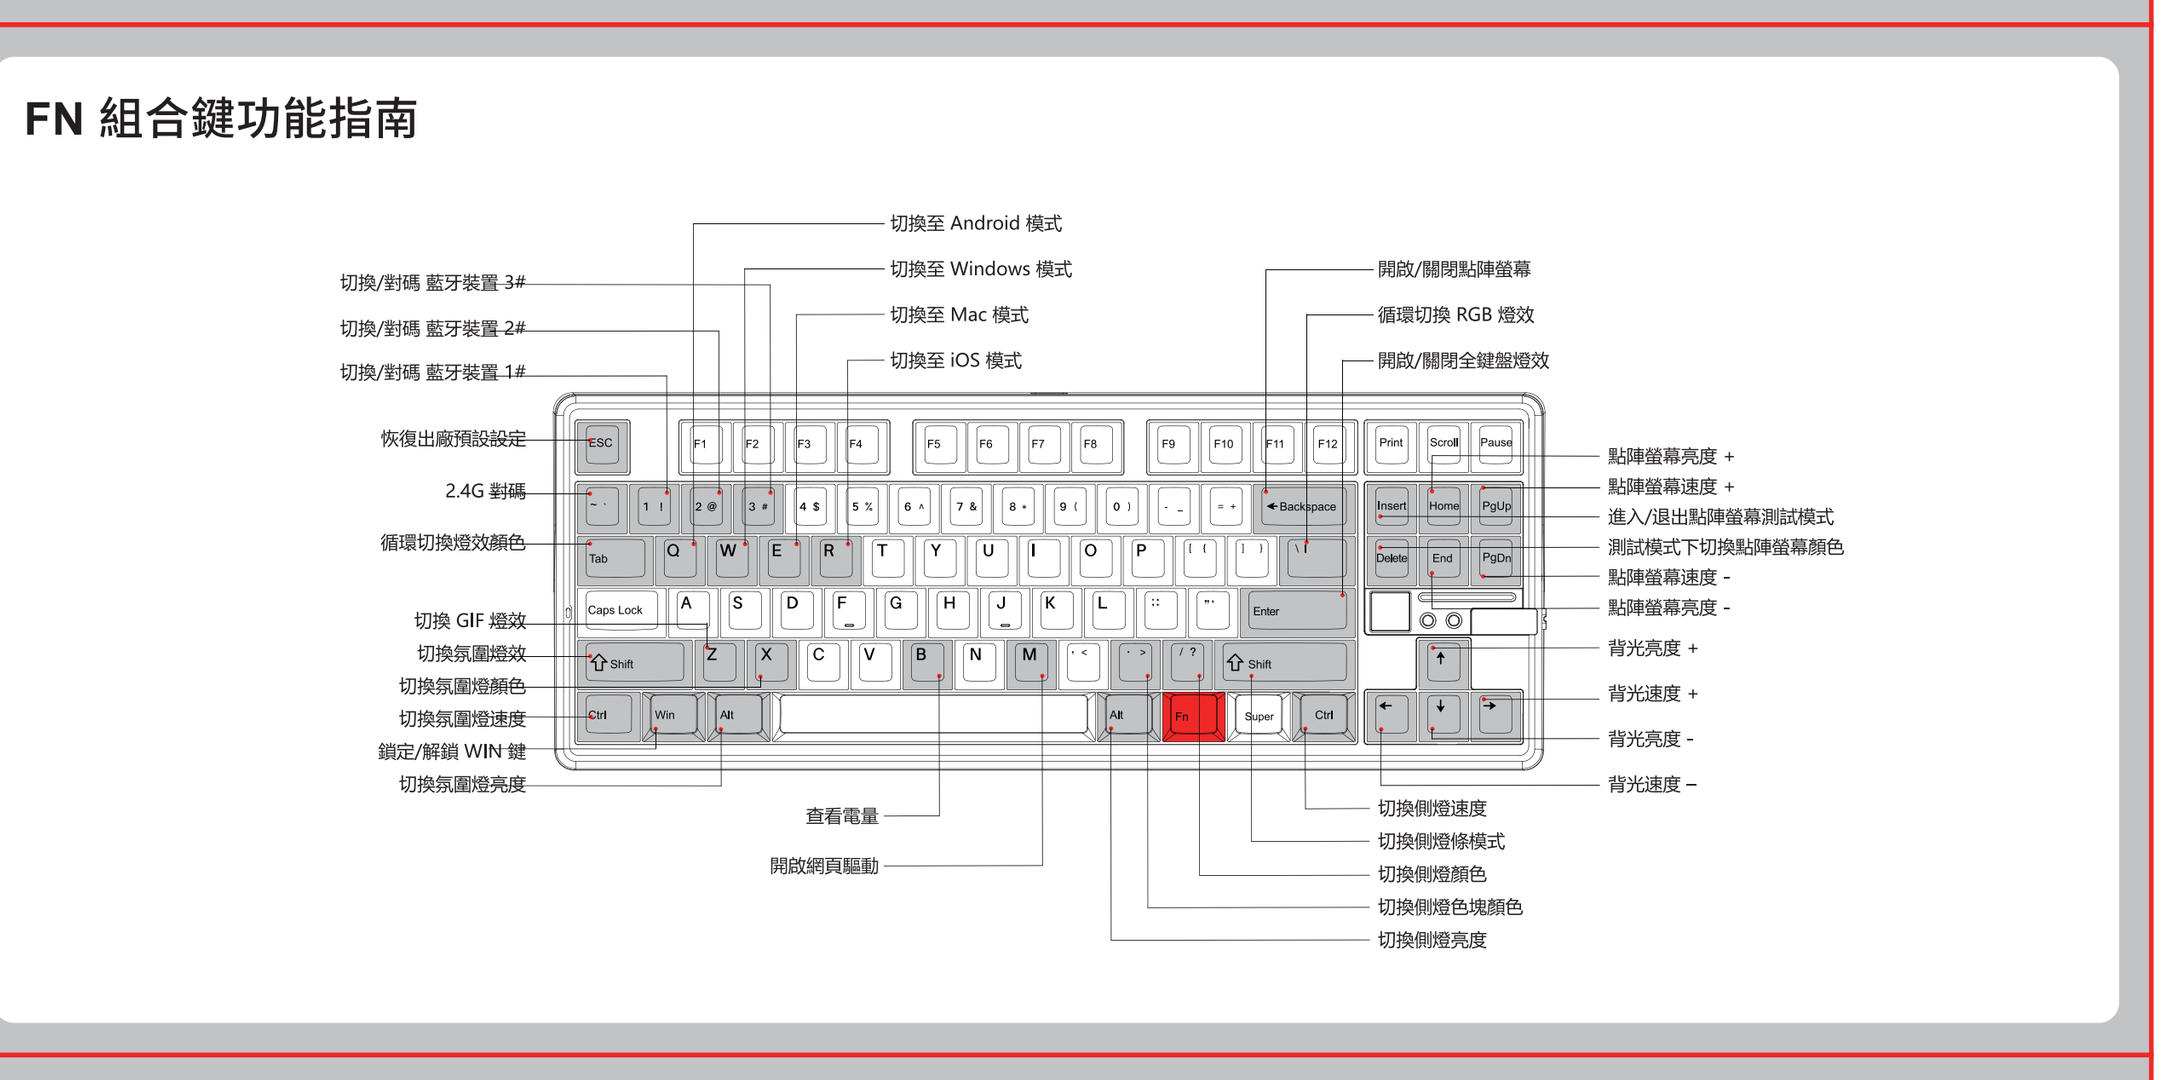


Guía de Combinaciones de Teclas FN y Funciones

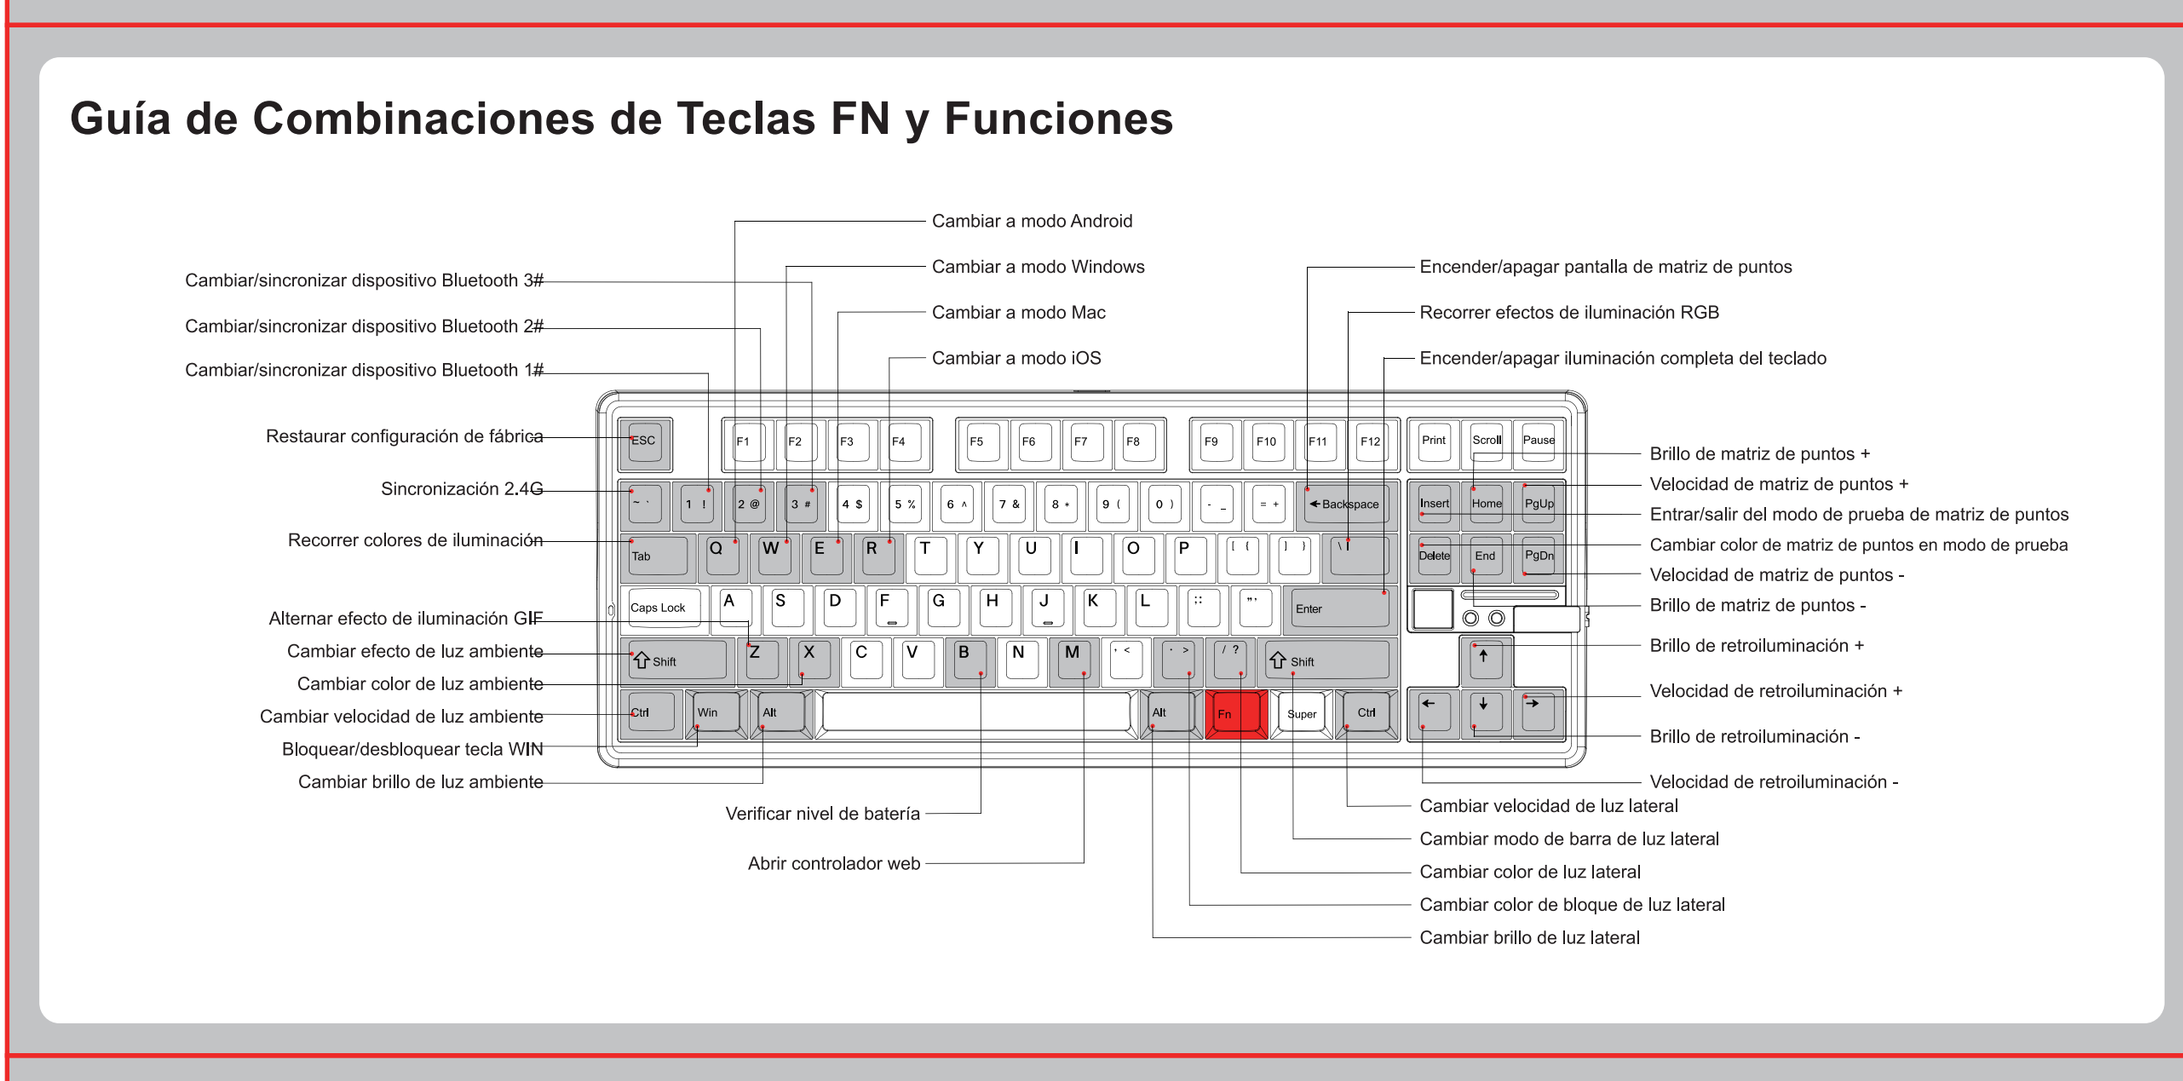

Hướng dẫn tổ hợp phím FN và chức năng

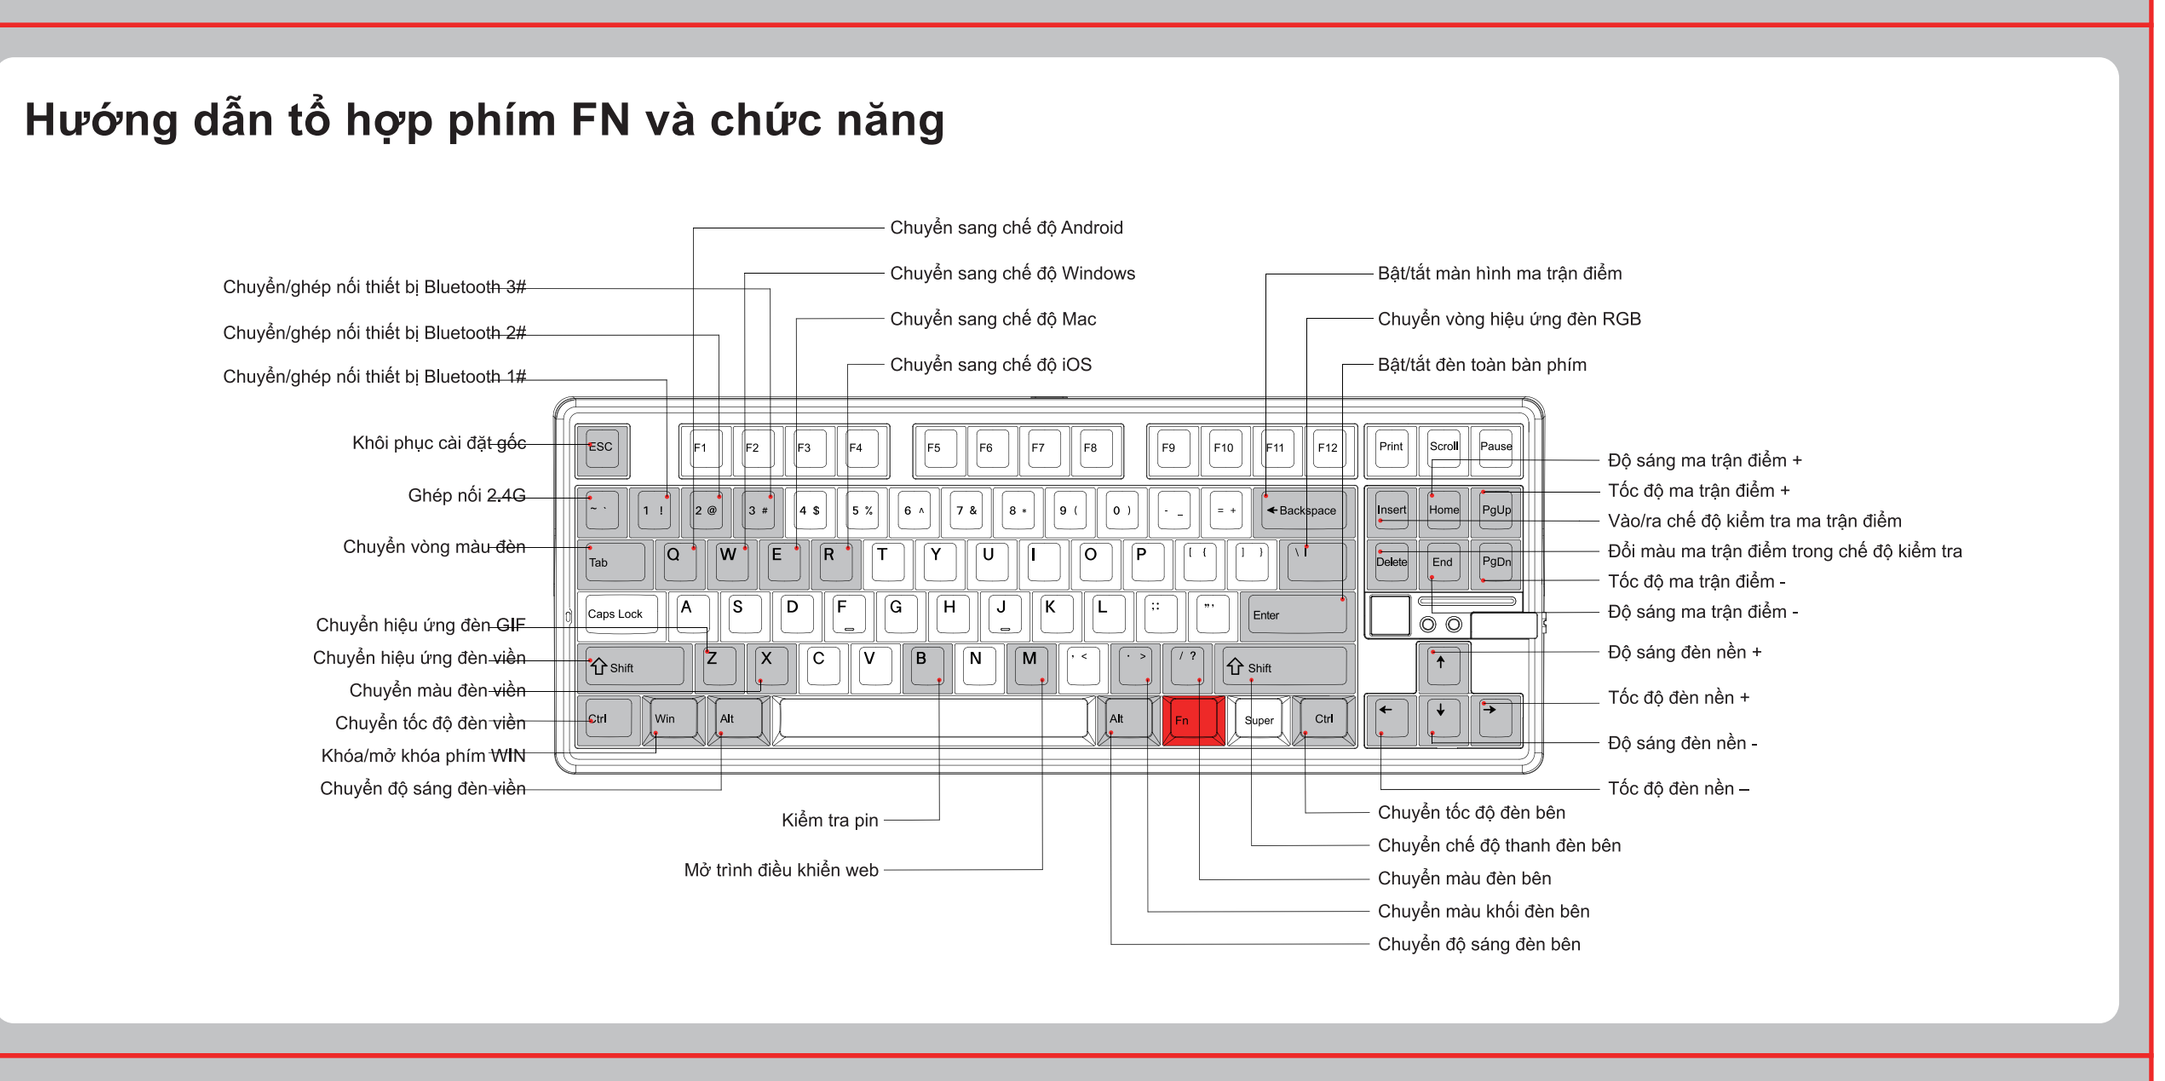

FN-Tastenkombinations-Funktionshandbuch

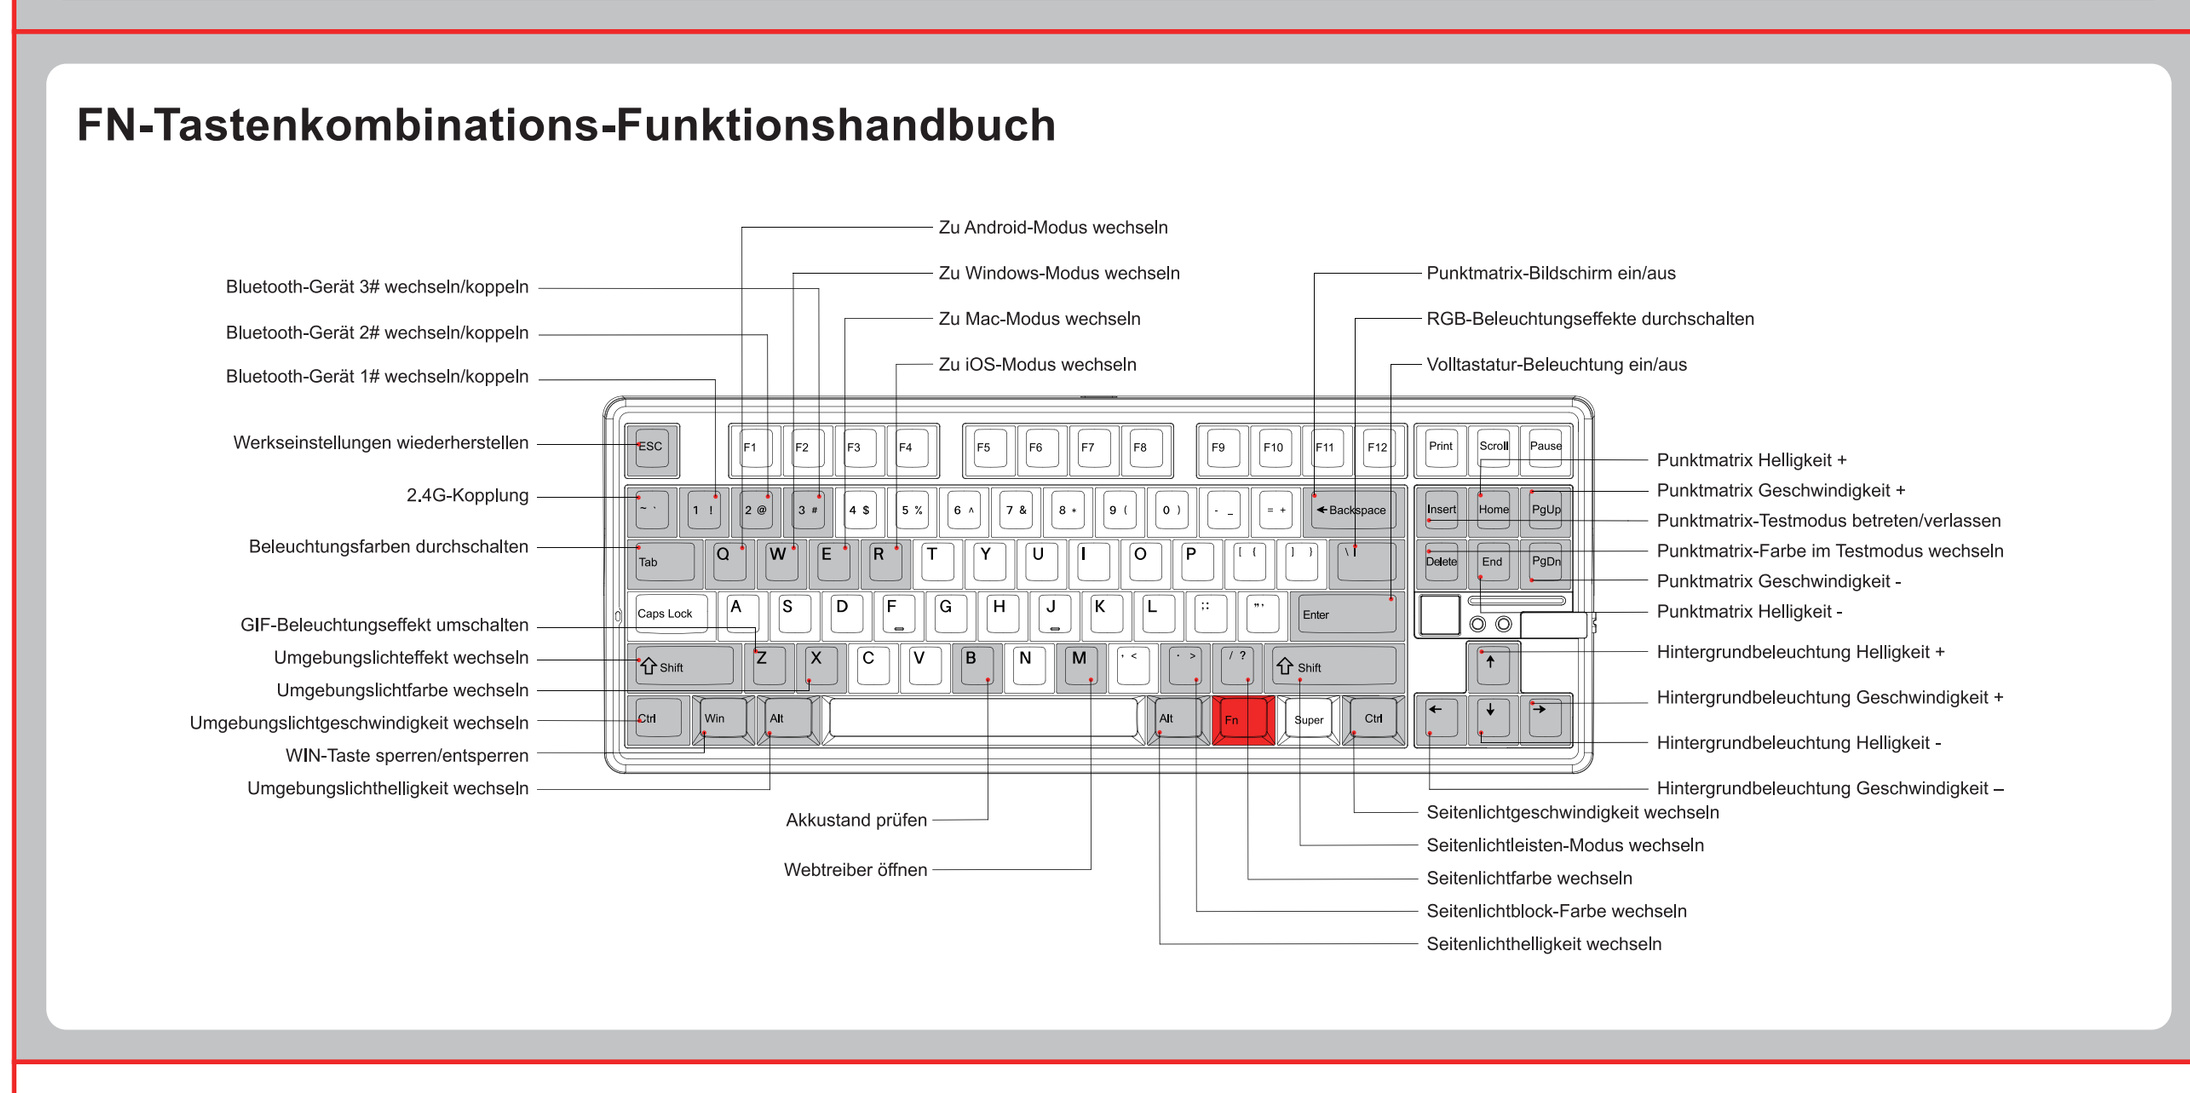

At AULA, passion isn't a feeling - it's our engineering standard. From our industrial roots to the global stage, we obsess over every micron of precision because we know what's at stake. We don't just build gear; we build the bridge between a player's instinct and their ultimate victory. Every click, every win, every heartbeat.

Fuel Your Passion

Dongguan Suoai Electronics CO.,LTD
www.aulastar.com
SOAI Industry Park,Huayu Street Changlong Village Huangjiang Town Dongguan City Guangdong Province
Execution Standard:GB/T 14081-2010
Made in China

RoHS COMPLIANT

Points de collecte sur www.quefairedemesdechets.fr

ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.
Спасибо за выбор продуктов AULA.
Компьютерные Клавиатура и мышь – основные устройства управления компьютером, предназначены для ввода данных (могут быть проводными или беспроводными (2.4 Ггц с передатчиком в комплекте или Bluetooth без передатчика)).
Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голоса) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4Ггц, Bluetooth, 2.4Ггц+ Bluetooth).
Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.
Стенд/Подставка для ноутбука/планшета необходима для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.
Колонки 2.0/2.1 предназначены для воспроизведения музыки и других аудио файлов, подключаются к ПК, ноутбукам, планшетам, смартфонам через разъем 3.5 мм, питаются от USB.


USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопители памяти, дополнительные мониторы и проводной интернет.
Подробные характеристики товара находятся на сайте www.aulagaming.ru
Подключение:
Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB/аудиоразъему (для гарнитур/ колонок) и проверьте работоспособность.

Изготовитель: DONGGUAN SUOAI ELECTRONICS CO.,LTD. Address: NO.3 HUAYU STREET,CHANGLONG VILLAGE HUANGJIANG TOWN,DONGGUAN CITY. Донгуан Суойа Электроникс Ко. ЛТД. Адрес: НО.3 ХУАЮ СТРИТ,ЧАНГЛОНГ ВИЛЛАДЖ ХУАНГЖИАНГ ТАУН ,ДОНГГУАН СИТИ. Импортер/Организация уполномоченная принимать претензии: ООО «Техпорт». Адрес: 107140, Москва г, внутригородская территория муниципальный округ Красносельский, 1-Й Красносельский ПЕР., дом № 9А, офис Этаж 3, Часть Пом. 9В, 9Г. телефон: +79153075886, электронная почта: Ootechport@ya.ru. Товар соответствует требованиям ТР ТС 037/2016 «Об ограничении применения опасных веществ в изделиях электротехники и радиоэлектроники» (для компьютерных мышей, клавиатур и гарнитур/колонок), а так же ТР ТС 020/2011 «Электромагнитная совместимость технических средств» (для колонок, Bluetooth/2.4Ггц гарнитур, клавиатур и мышей с беспроводным способом подключения (Bluetooth/2.4Ггц)).Информация о разрешительной документации размещена на упаковке. Коврики для мыши/стенды/ подставки для ноутбука/планшета обязательной сертификации не подлежат. Информация о гарантийном обслуживании предоставлена на сайте www.aulagaming.ru. Гарантийный срок: 1 год. Срок службы: 2 года. Срок годности: не ограничен. Дата производства указана на упаковке. Использовать только по прямому назначению. Не ронять, не разбирать, беречь от огня, перегрева и попадания жидкости. Конструкция, внешний вид и технические характеристики могут быть изменены без предварительного уведомления. Страна изготовления: Китай.

www.aulagaming.ru

封底

说明书技术要求：
1.成品尺寸：170mm×80mm
2.材质：128g铜版纸
3.工艺：风琴折(四色正反面印刷)

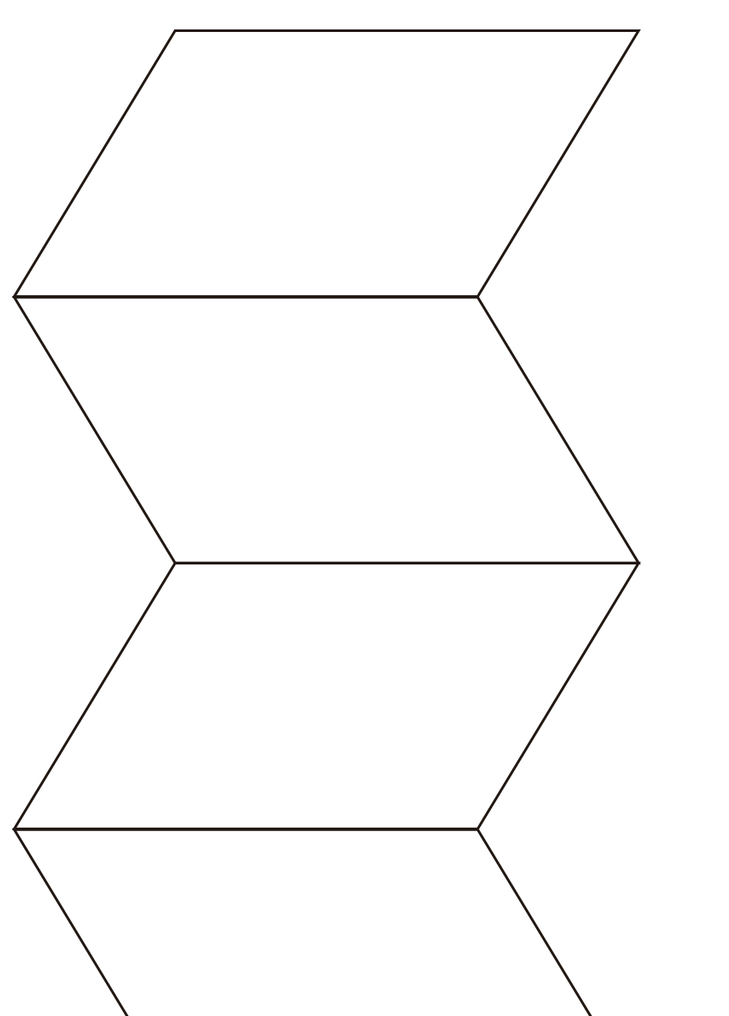

1788 C　　420 C