AULA

F75

TRI-MODE RGB MECHANICAL KEYBOARD

FUEL YOUR PASSION

Tri-mode Mechanical Keyboard Connection Instructions

USB-C Wired Connection
Set the keyboard mode switch to Wired, then use the USB-C cable included in the package to connect the keyboard to a USB port on your computer.

2.4G Wireless Connection
Set the keyboard mode switch to 2.4G, take out the 2.4G receiver from the keyboard storage compartment, and plug it into a USB port on your computer.

BT Wireless Connection
Set the keyboard mode switch to BT, then press and hold Fn + Q/W/E for about 3 seconds until the indicator light flashes rapidly, entering pairing mode.

Product Specifications

- Number of keys: 80 keys
- Product size: 322.7（L)X143.2 (W) x43.1 (H) +1mm
- Product weight: 1023g (including wire/receiver)
- Charging voltage/current: DC 5V/700mA Rated voltage: DC 3.7V
- Battery life: about 17.5 hours (default lighting effect)about 265.5 hours (turn off all light)
- Battery capacity:4000mAh
- Charging interface: Type-C
- Computer System Requirements:Windows WIN XP, WIN7,WIN8, WIN10(Driver may be required under Win95 and Win98 systems)

Product Introduction

- Stylish design, 80 key layout, Gasket structure, delicate and soft touch.
- Hot-swap function, compatible with 3-pin and 5-pin switches, can also purchase various brands of switches and personalized keycaps on the market for free DIY.
- The keyboard material is solid and the buttons are responsive.
- Two stage tripod with concealed independent storage receiver.
- The user-friendly design of the keyboard, combined with the Fn key, adds a series of commonly used shortcut function buttons.
- Keyboard return rate: wired mode 1000Hz, 2.4G mode 1000Hz, BT mode 125Hz.
- The BTC4Ofamed mode of the keyboard supports full key and no impact.

คู่มือฟังก์ชันการรวมปุ่ม FN



Please visit the AULA official website to download the driver to use this product.

AULA driver software provides a customizable user experience.
Please use the AULA driver to access this feature.

www.aulastar.com

This application is used to perform the following functions:

- tomize key assignments and FN layers
- Factory reset
- Adjust lighting colors and effects
- Firmware upgrade
- Performance tuning
- Macro programming

Guide des fonctions des combinaisons de touches FN

Maintenance and Care

- Avoid liquids: Do not rinse the keyboard with water or spray any liquid directly onto its surface. Liquids may cause short circuits inside the keyboard or oxidation of metal contacts.
- Avoid harsh cleaners: Do not use cleaning agents containing corrosive substances (e.g., ammonia, strong acids, or alkalis). These may erode the keycap coating or plastic housing, leading to discoloration or brittleness.
- Avoid extreme environments: Do not expose the keyboard to dusty or humid conditions for extended periods.

Charging instructions

1. It is recommended to use only the computer USB port to charge the keyboard.
2. Do not use fast-charging cell phone chargers to charge the keyboard.
3. Do not use inferior non-standard power adapter to charge the keyboard.
4.Do not use over-voltage and over-current power adapter to charge the keyboard.
5.Please keep away from high temperature equipment when charging
6.-Please turn off the power switch if it is not used for a long time.
7. The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)

Посібник із функцій комбінацій клавіш FN



FN Key Combinations Function Guide

Panduan Fungsi Kombinasi Tombol FN



FN 키 조합 기능 안내

FN キーコンビネーション機能ガイド



Guia de Funções das Combinações de Teclas FN

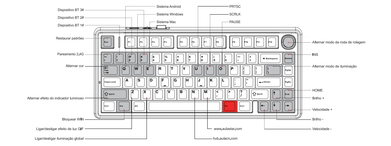

FN 组合键功能指南



Guia de Funciones de Combinaciones de Teclas FN

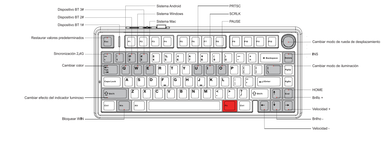

FN 組合鍵功能指南



Leitfaden für FN-Tastenkombinationsfunktionen

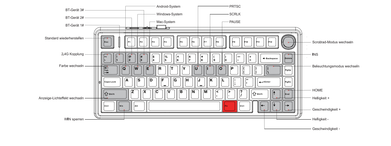

AULA

At AULA, passion isn't a feeling - it's our engineering standard. From our industrial roots to
the global stage, we obsess over every micron of precision because we know what's at stake.
We don't just build gear; we build the bridge between a player's instinct and their ultimate victory.
Every click, every win, every heartbeat.

Fuel Your Passion

Guida alle Funzioni delle Combinazioni di Tasti FN

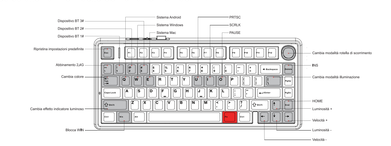

ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.
Спасибо за выбор продуктов AULA.
Компьютерные Клавиатура и мышь — основные устройства управления компьютером, предназначены для ввода данных (могут быть проводными или беспроводными (2.4 Гц с передатчиком в комплекте или Bluetooth без передатчика).
Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голос) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4Гц, Bluetooth, 2.4Гц + Bluetooth).
Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.
Стенд/Подставка для ноутбука/планшета необходима для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.
Колонка 2.0/2.1 предназначена для воспроизведения музыки и других аудио файлов, подключается к ПК, ноутбукам, планшетам, смартфонам через разъем 3.5 мм, питается от USB.

USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопители памяти, дополнительные мониторы и проводной интернет.
Подробные характеристики товара находятся на сайте www.aulagaming.ru
Подключение:
Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB/аудиоразъему (для гарнитуры/ колонки) и проверьте работоспособность.

ООО "ЕВРОАЗИЯ ЭЛЕКТРОНИКС" (г. СПб, Адреса: АО г.НАРЬЯ СТРАТ,САНКЦЕЛЯС ИОАНКАЛЕ ТЕМЯ,ВЕЯЦЦАЛ СТ). Данная Декларация выполнена на: ПЕ, Адрес: АО, г.ПЕЛЕ СТРАТ,КАЛЕЯ ВЕЯЦЦА СТАНТ,ВЕЛ ТЕМ,ДЕЛ ТЕМ,СПЕ. Фирма-изготовитель оставляющие производить технические изменения в конструкции, не ухудшающие технические характеристики, не влияющие на эксплуатационные свойства, не ухудшающие внешний вид изделия, не влияющие на безопасность. Выбор/покупка/ц, а также сроки/период службы/жизни ПЕ ЕТ ОСТАЛ ОБ ограниченно применяемых изделий, а также ограничения по использованию, ограничения по использованию в ограниченном виде, ограничения по ПЕ ЕЦЕ СТ. Электромагнитная совместимость технических средств (в т.ч. изделия), Bluetooth,ТС ВТ.ц.ц.ц