
HERO 75 HE

TRIPLE-MODE MAGNETIC SWITCH KEYBOARD

FUEL YOUR PASSION

Product Introduction

- Featuring a stylish design with unique streamers and a robust hull structure, this keyboard offers a firm and responsive feel, making it perfect for various gamingscenarios.
- The keyboard includes a range of convenient shortcut keys in combination with the Fn key, allowing for quick access to commonly used functions.
- Designed for customization, the keycaps and magnetic switches are hot-swappable, allowing users to freely replace keycaps with personalized options available onthe market. The keyboard supports popular magnetic switches and allows mixed-axis configurations.
- Built with premium materials, the keyboard ensures highly responsive keystrokes.
- The driver software allows you to adjust the magnetic switch actuation distancefrom 0.1mm to 3.4mm, with a remarkable 0.005mm adjustment accuracy, providinga tailored typing and gaming experience.
- The keyboard uses a Type-C connection, ensuring a more stable and reliableperformance during extended use.
- Polling Rate: Up to 8000Hz, ensuring ultra-low input lag.
- Full-Key Scan Rate: 48000Hz for seamless and accurate key response.
- Per-Key Scan Rate: 128000Hz for extreme precision, ensuring every keypress is captured without delay.

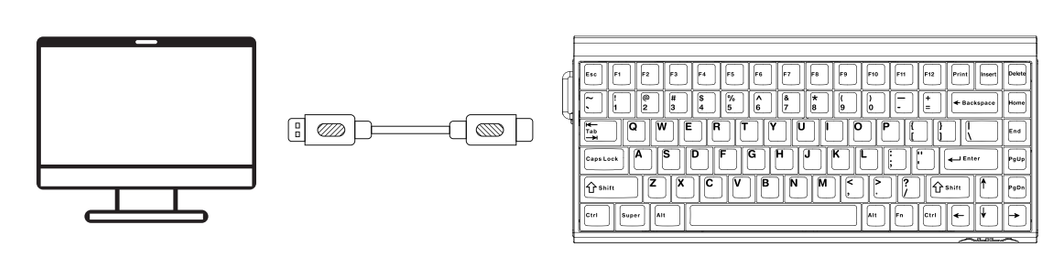

Product Specifications

- Keys: 84 keys
- Tri-Mode Magnetic Switch Keyboard
- Product Dimensions: 313.0x138.95x42.51+0.1mm (without side panel)
  322.05x138.95x42.51+0.1mm (with side panel)
- Product Weight: Approx. 980g (excluding cable)
- Rated Voltage: DC 5V
- Rated Current: <750mA Requires a USB 1.1 port or higher.
- System Compatibility: Compatible with all Windows operating systems including WIN XP,WIN7, WIN8, WIN10 (may require drivers for Win95 and Win98).
- Connection Type: Wired(Type-c) /2.4GHz Wireless/BT

Magnetic Switch Adjustment Method

1. Dynamic Keystroke (DKS): Customize the current key to trigger 1 to 4 different functions based on key press and release depth.
2. Multi-Point Trigger (MPT): A single key can trigger up to three different key functions at three separate actuation depths.
3. Mod Tap (MT): Assign two functions to a single key; hold for one function, tap for another.
4. Toggle Key (TGL): Configure the current key for continuous triggering with a single press, while holding the key retains normal trigger behavior.
5. Release Trigger (END): A single key can send another key command upon release.
6. SOCD Function: Bind two keys so that the last pressed key overrides and releases the previous key, ensuring only one key is triggered at a time.
7. Rapid Trigger (RT): Dynamically adjusts the actuation and reset points based on your key press and release actions for faster response.

Please visit the AULA web-based driver to use this product.

The AULA HUB software provides a customizable user experience.
Please use the AULA HUB web-based driver to access this feature.

www.aulastar.com

This application is used to perform the following functions:

- Configure Quick Trigger Functions
- Online Firmware Upgrade
- Quick Tap Feature
- Customize Key Values and FN Layer
- Restore Factory Settings
- Adjust Lighting Colors and Effects
- Set Super Keys (DKS, Advanced Keys, and Macro Functions)


Maintenance and Care

- Avoid liquids: Do not rinse the keyboard with water or spray any liquid directly onto its surface. Liquids may cause short circuits inside the keyboard or oxidation of metal contacts.
- Avoid harsh cleaners: Do not use cleaning agents containing corrosive substances (e.g., ammonia, strong acids, or alkalis). These may erode the keycap coating or plastic housing, leading to discoloration or brittleness.
- Avoid extreme environments: Do not expose the keyboard to dusty or humid conditions for extended periods.


Troubleshooting

Keyboard backlight does not turn on	1. Check the data cable connection – reconnect if necessary. 2. If the problem persists, replace the data cable.
Keys are unresponsive or respond incorrectly	1. Check whether the actuation point is set too low. 2. Verify that the correct switch type is selected in the settings. 3. Perform keyboard recalibration.
Keyboard cannot be calibrated	1. Ensure the firmware is updated to the latest version. 2. Confirm that the installed physical switches match the switch type selected in the software settings.

Fn Key Combinations and Function Guide

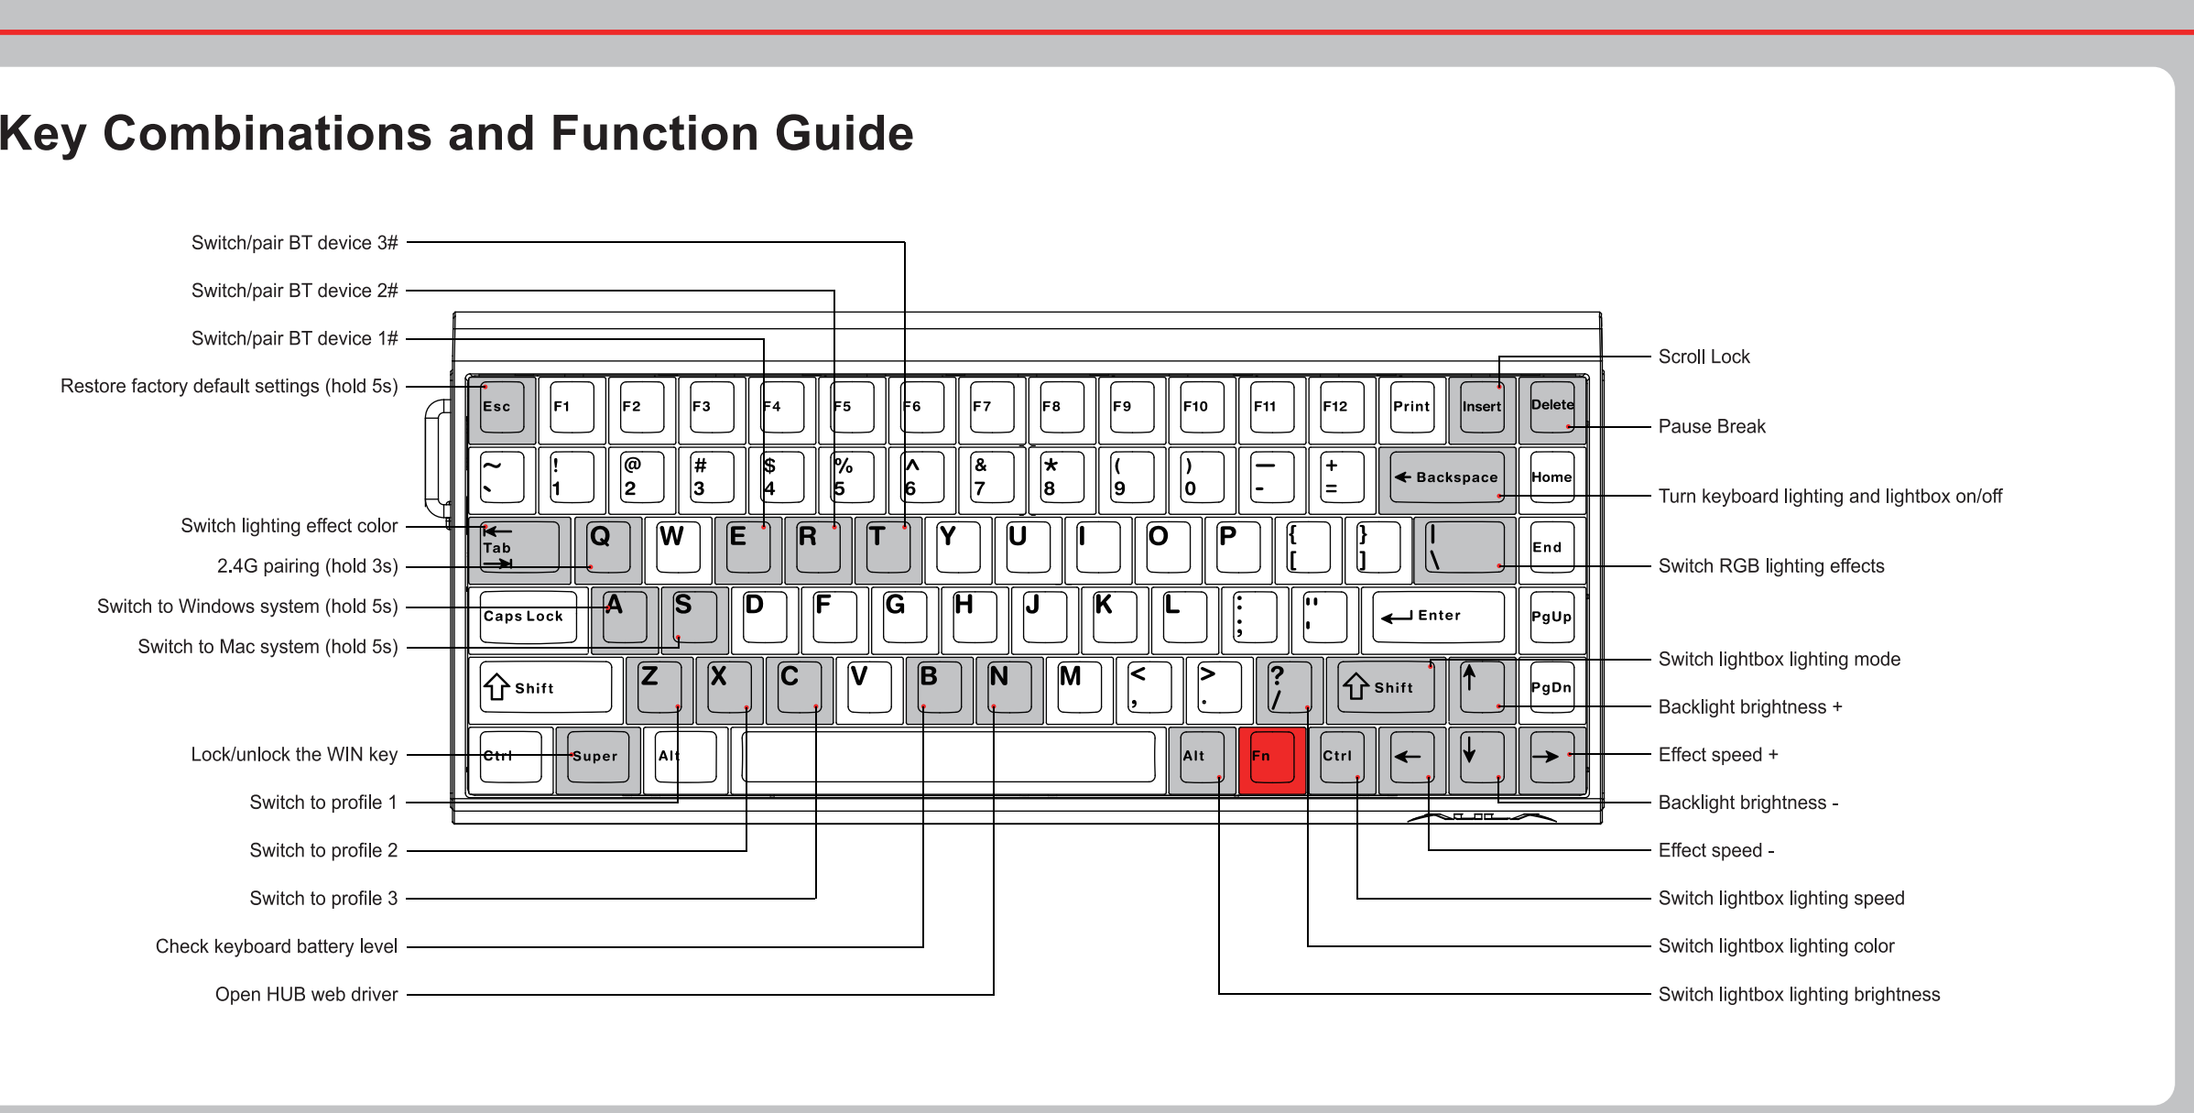

Fn 키 조합 및 기능 안내

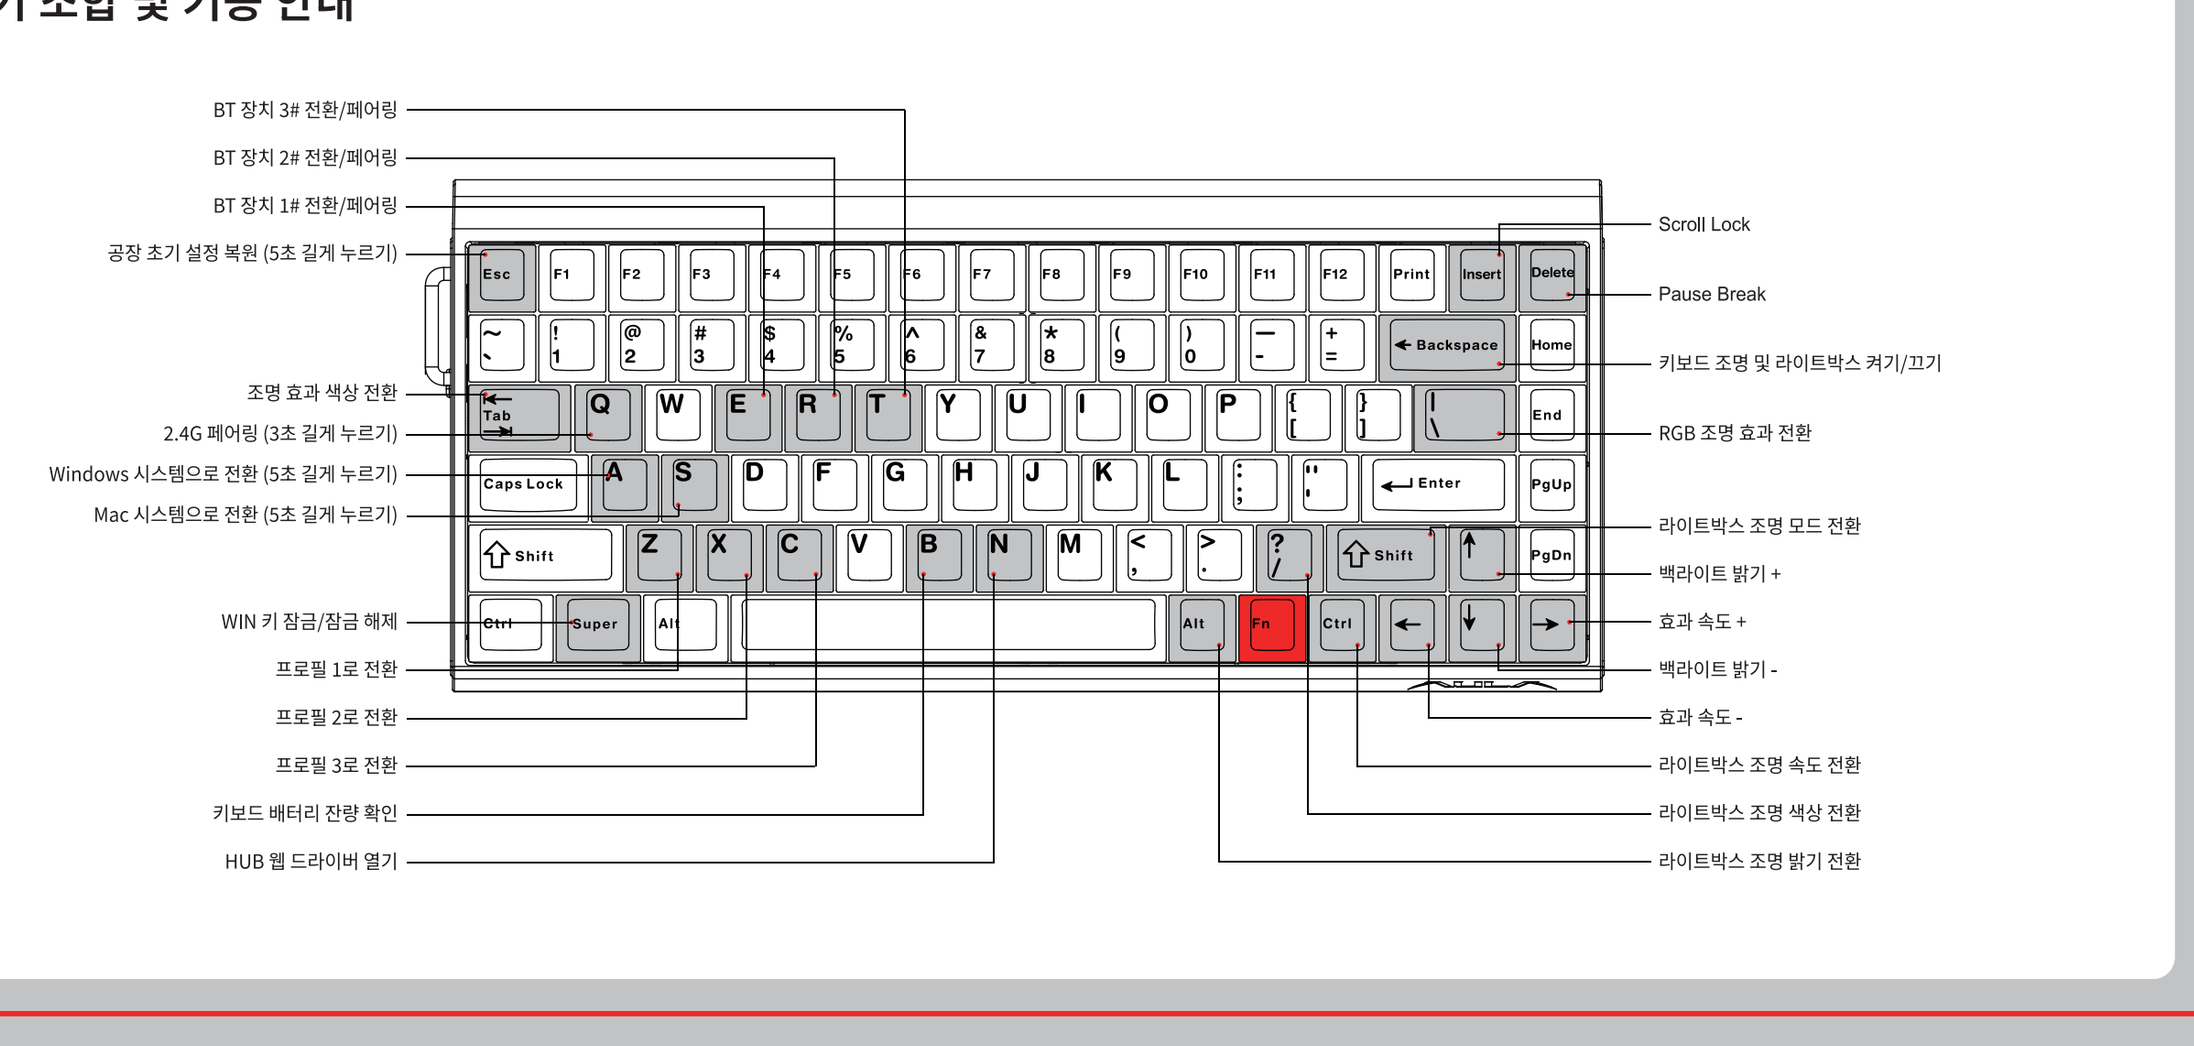


Guia de Funções das Combinações de Teclas FN



Guía de Funciones de Combinaciones de Teclas FN




FN-Tastenkombinations-Funktionshandbuch

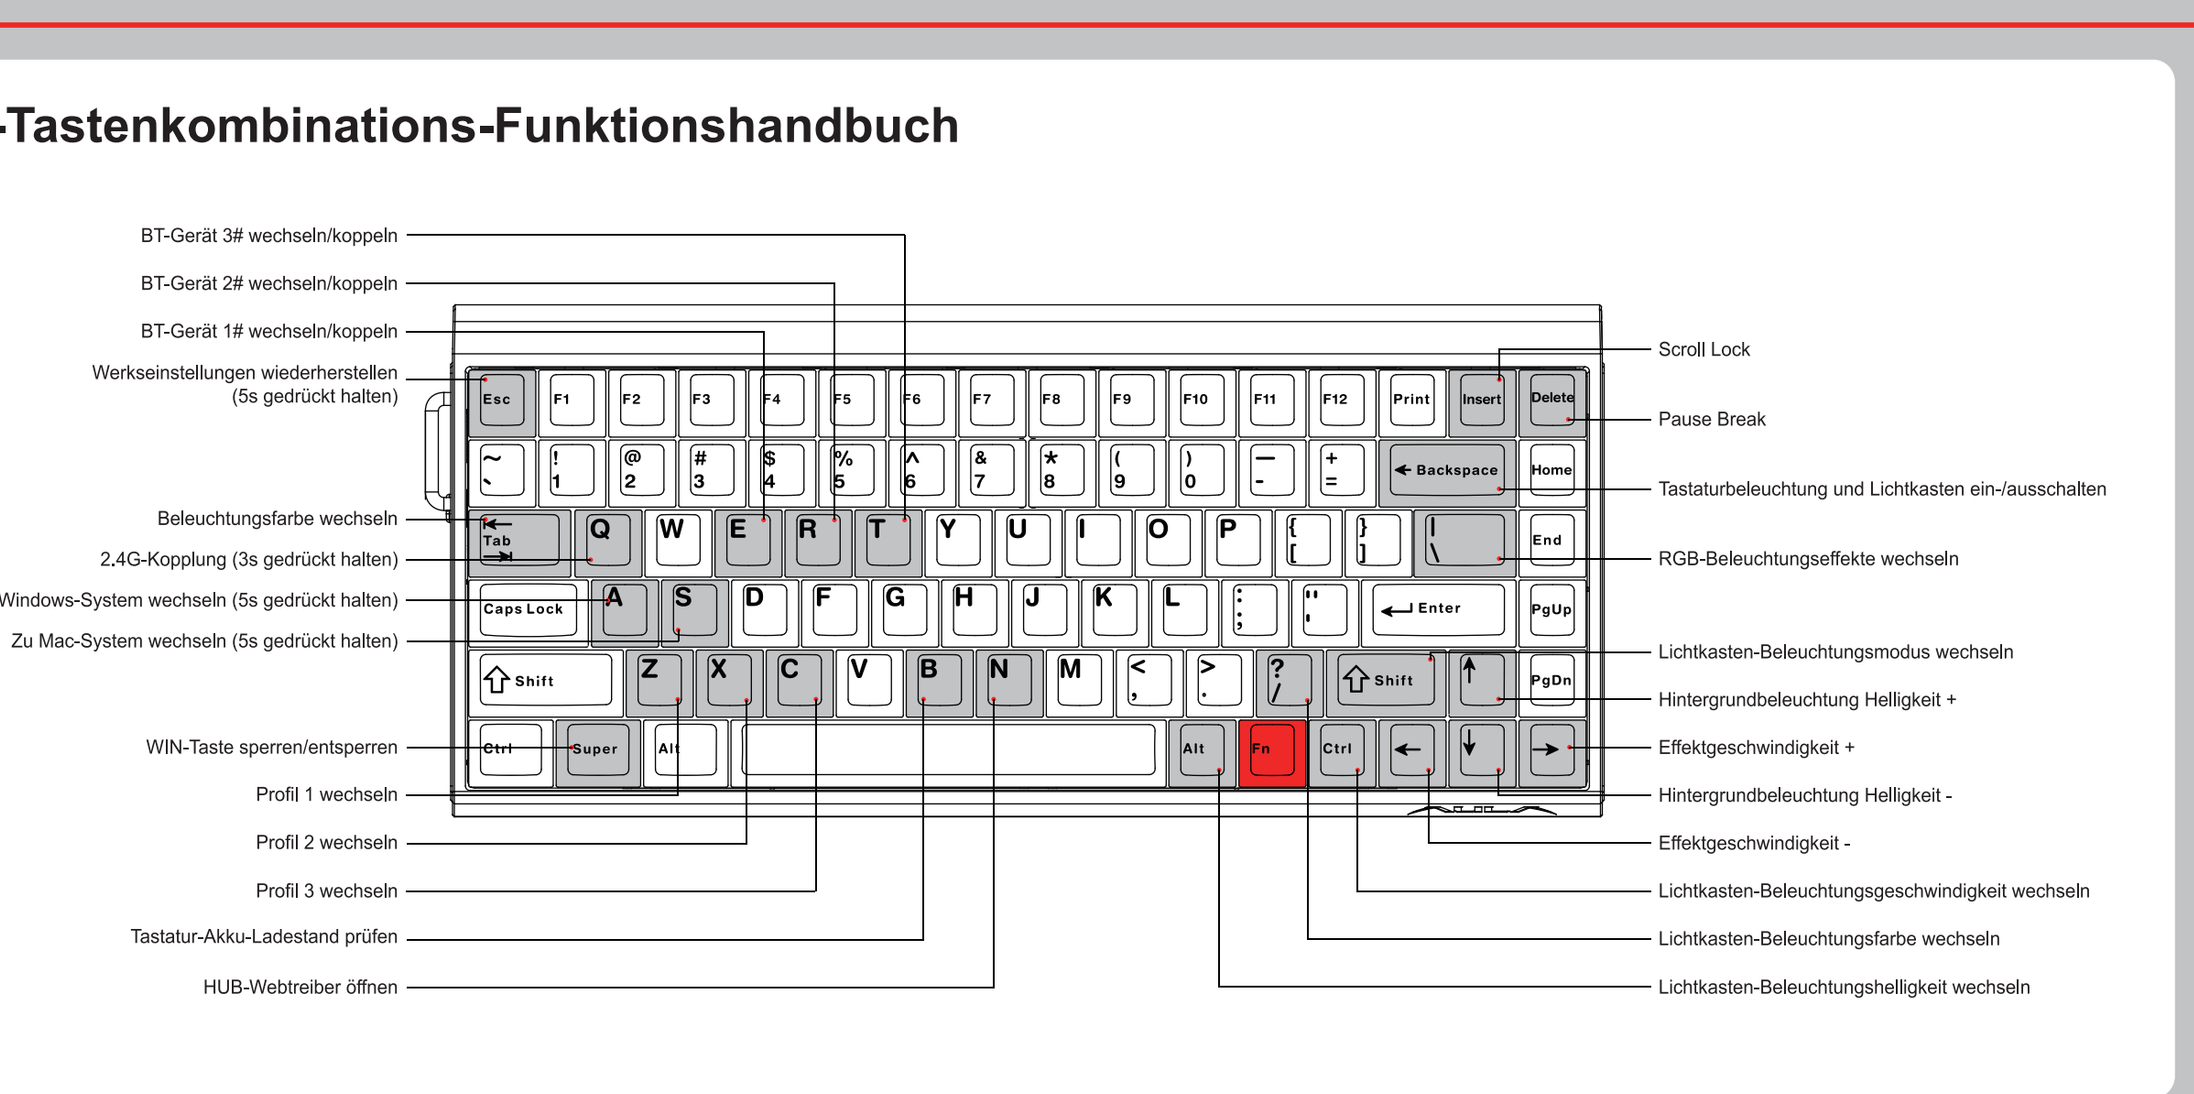


Guida alle Funzioni delle Combinazioni di Tasti FN




FN Tuş Kombinasyonları Fonksiyon Kılavuzu

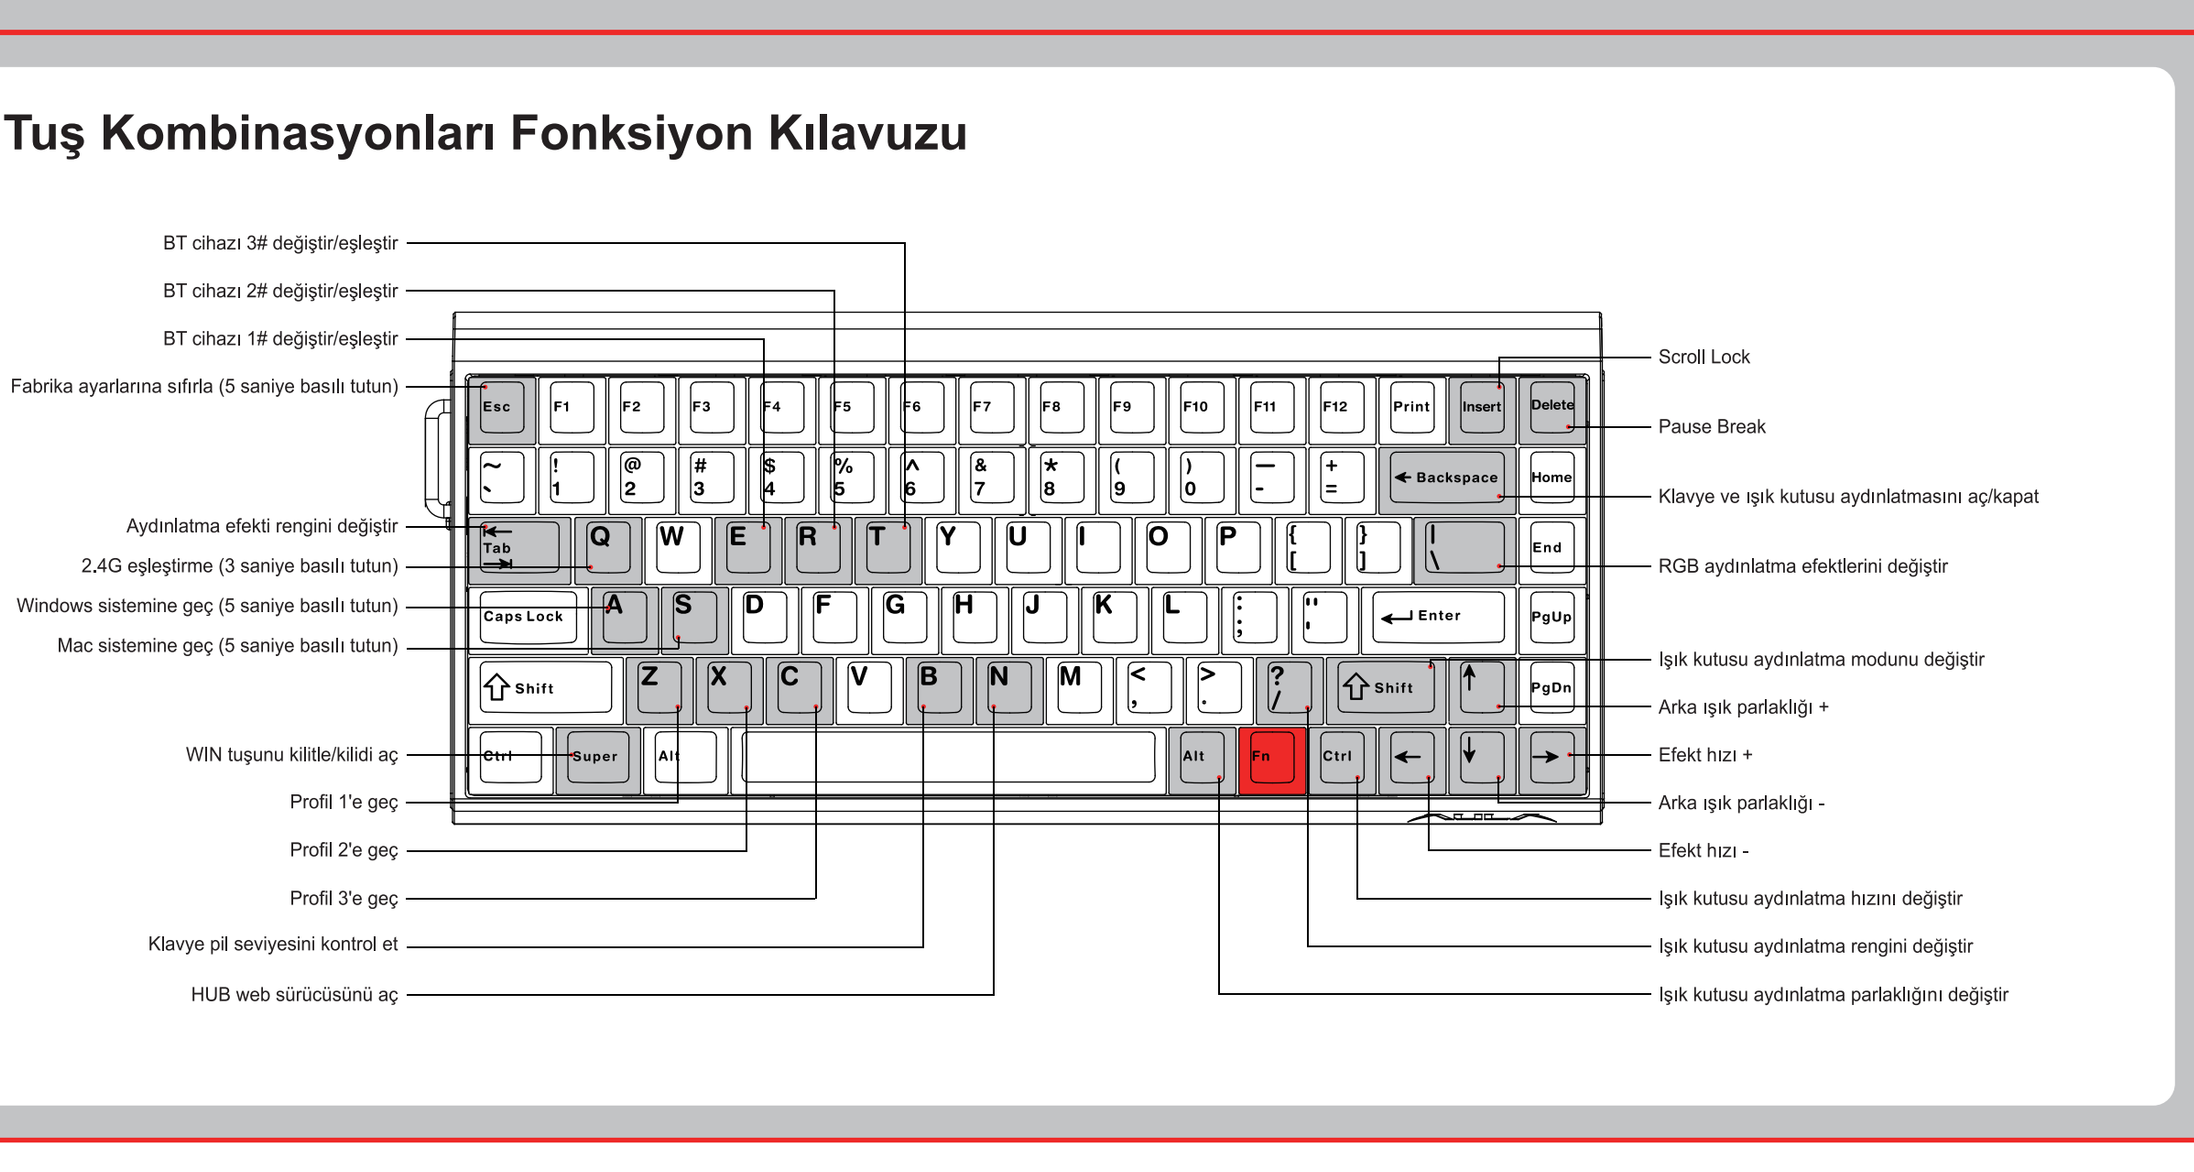


Руководство по функциям комбинаций клавиш FN

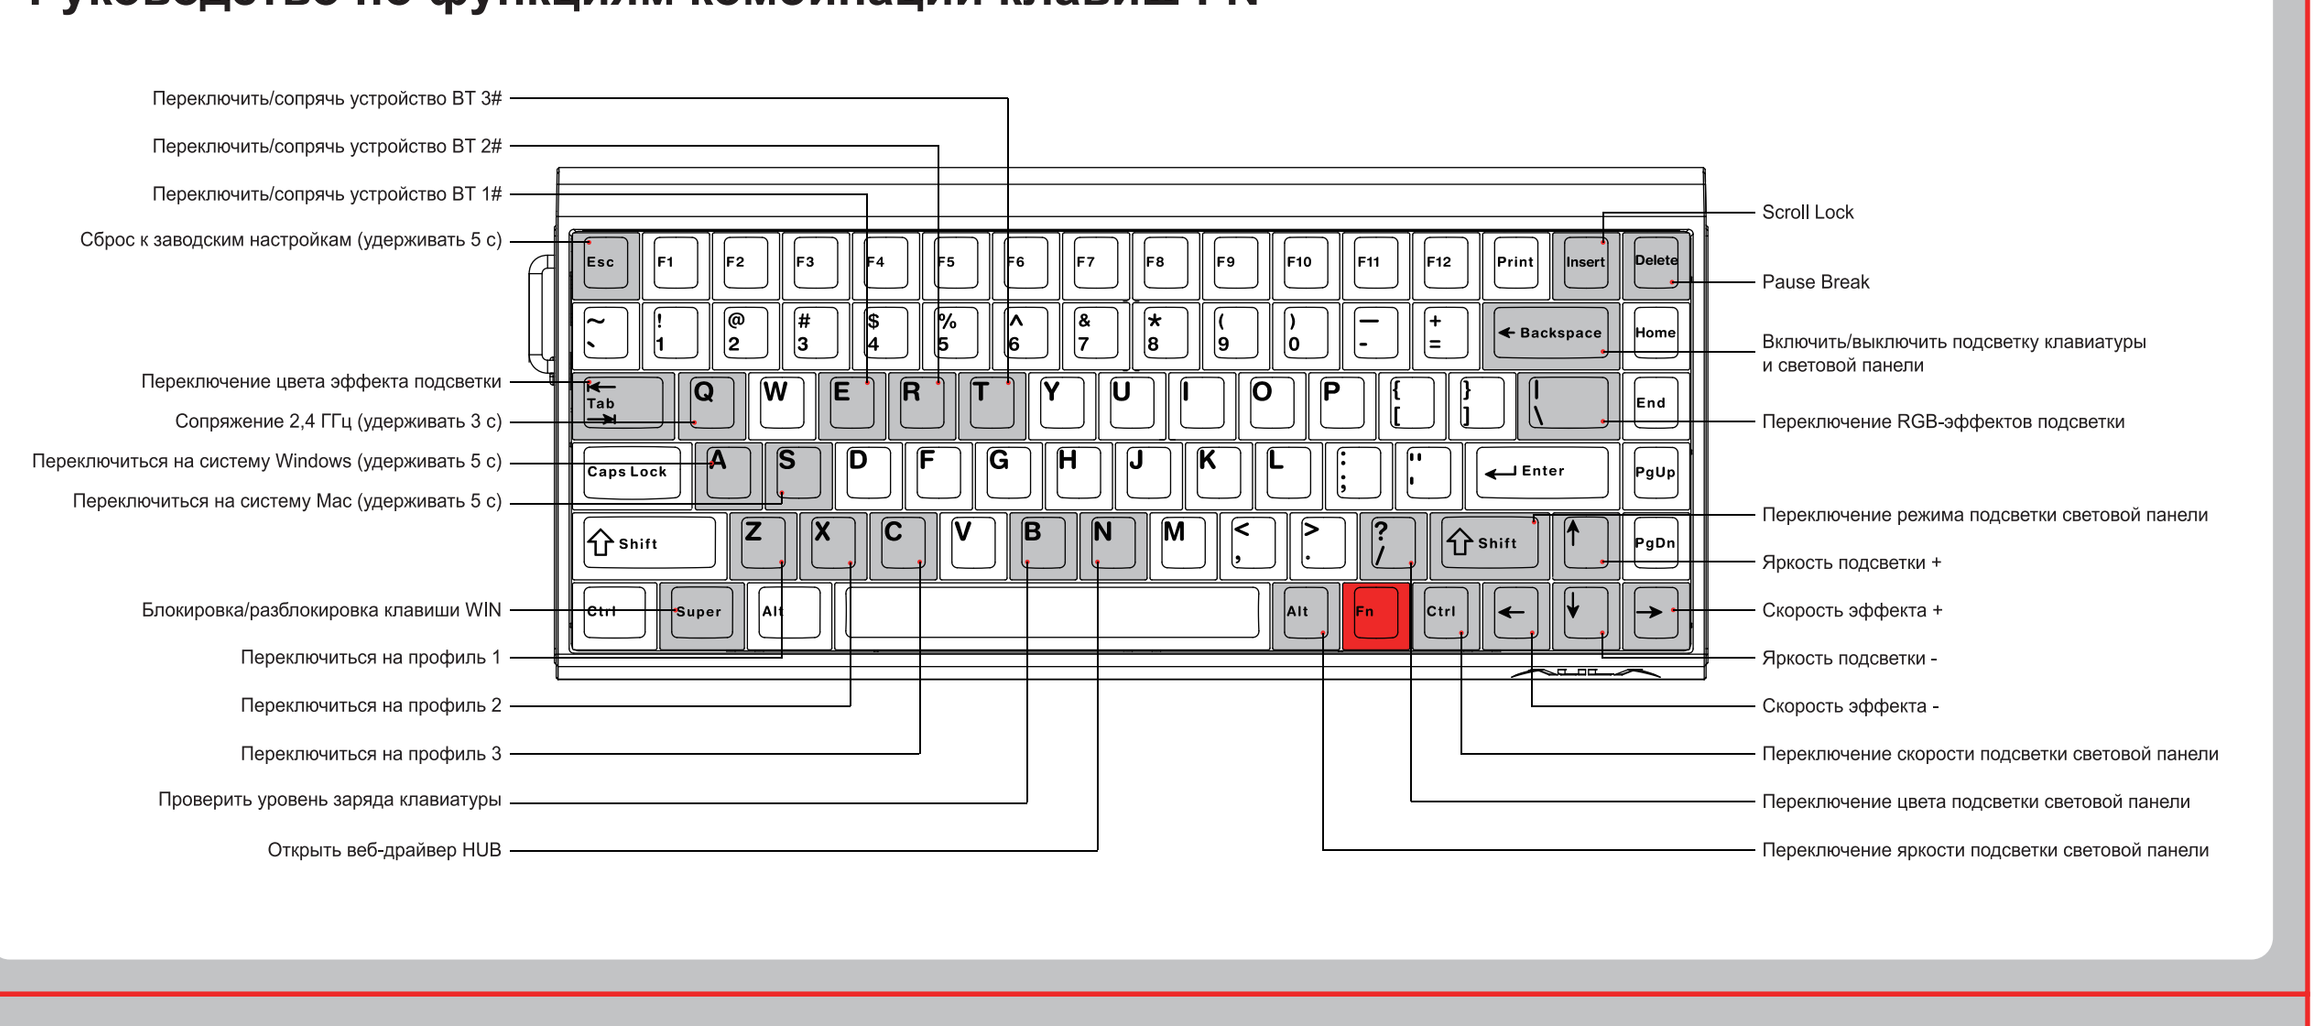


คู่มือฟังก์ชันการรวมปุ่ม FN

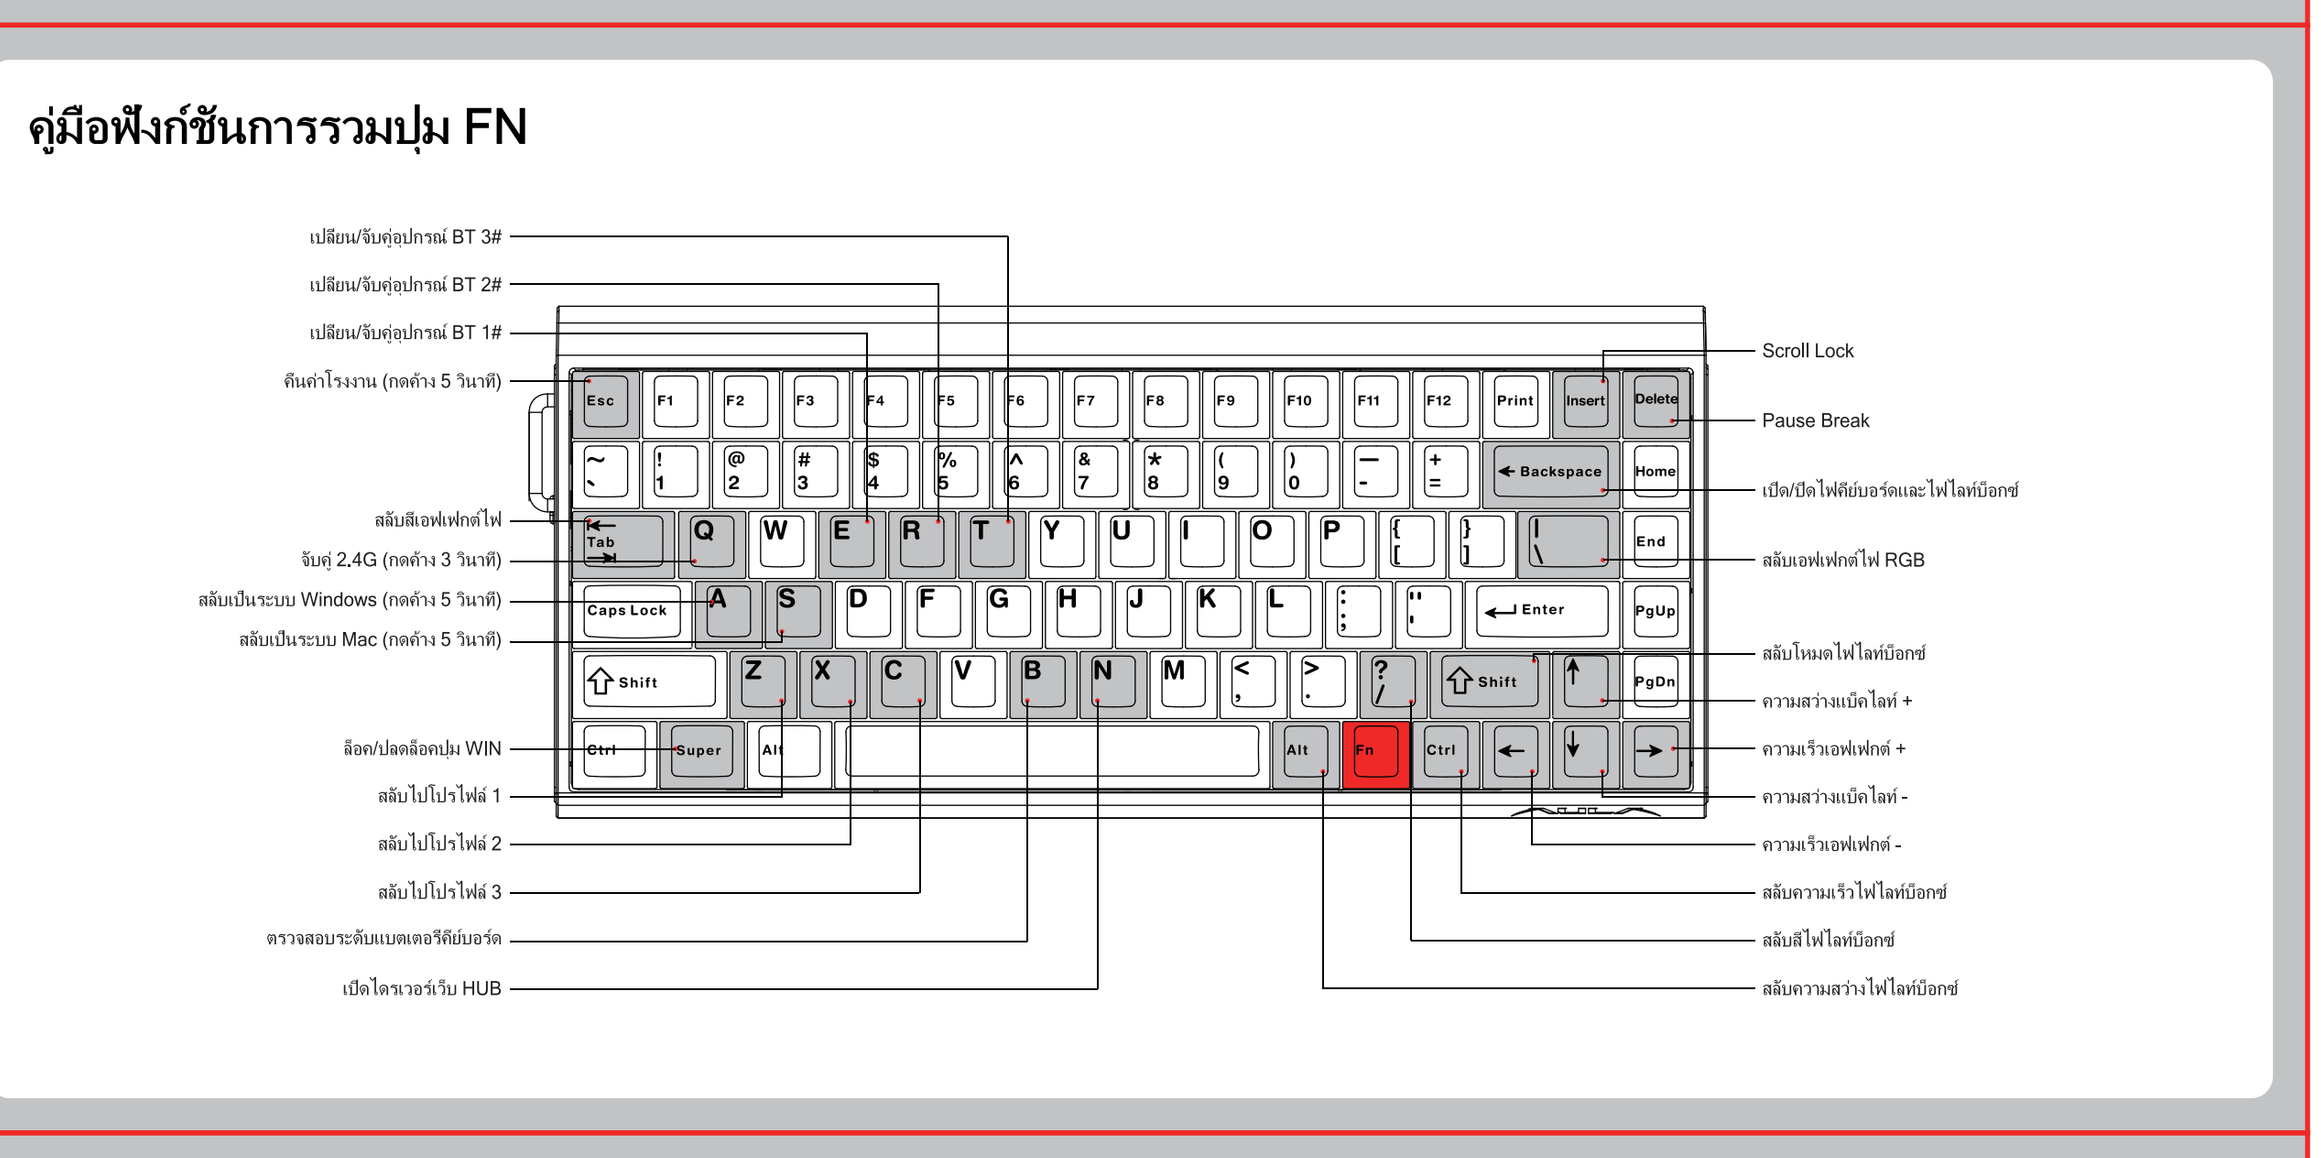


Guide des fonctions des combinaisons de touches FN

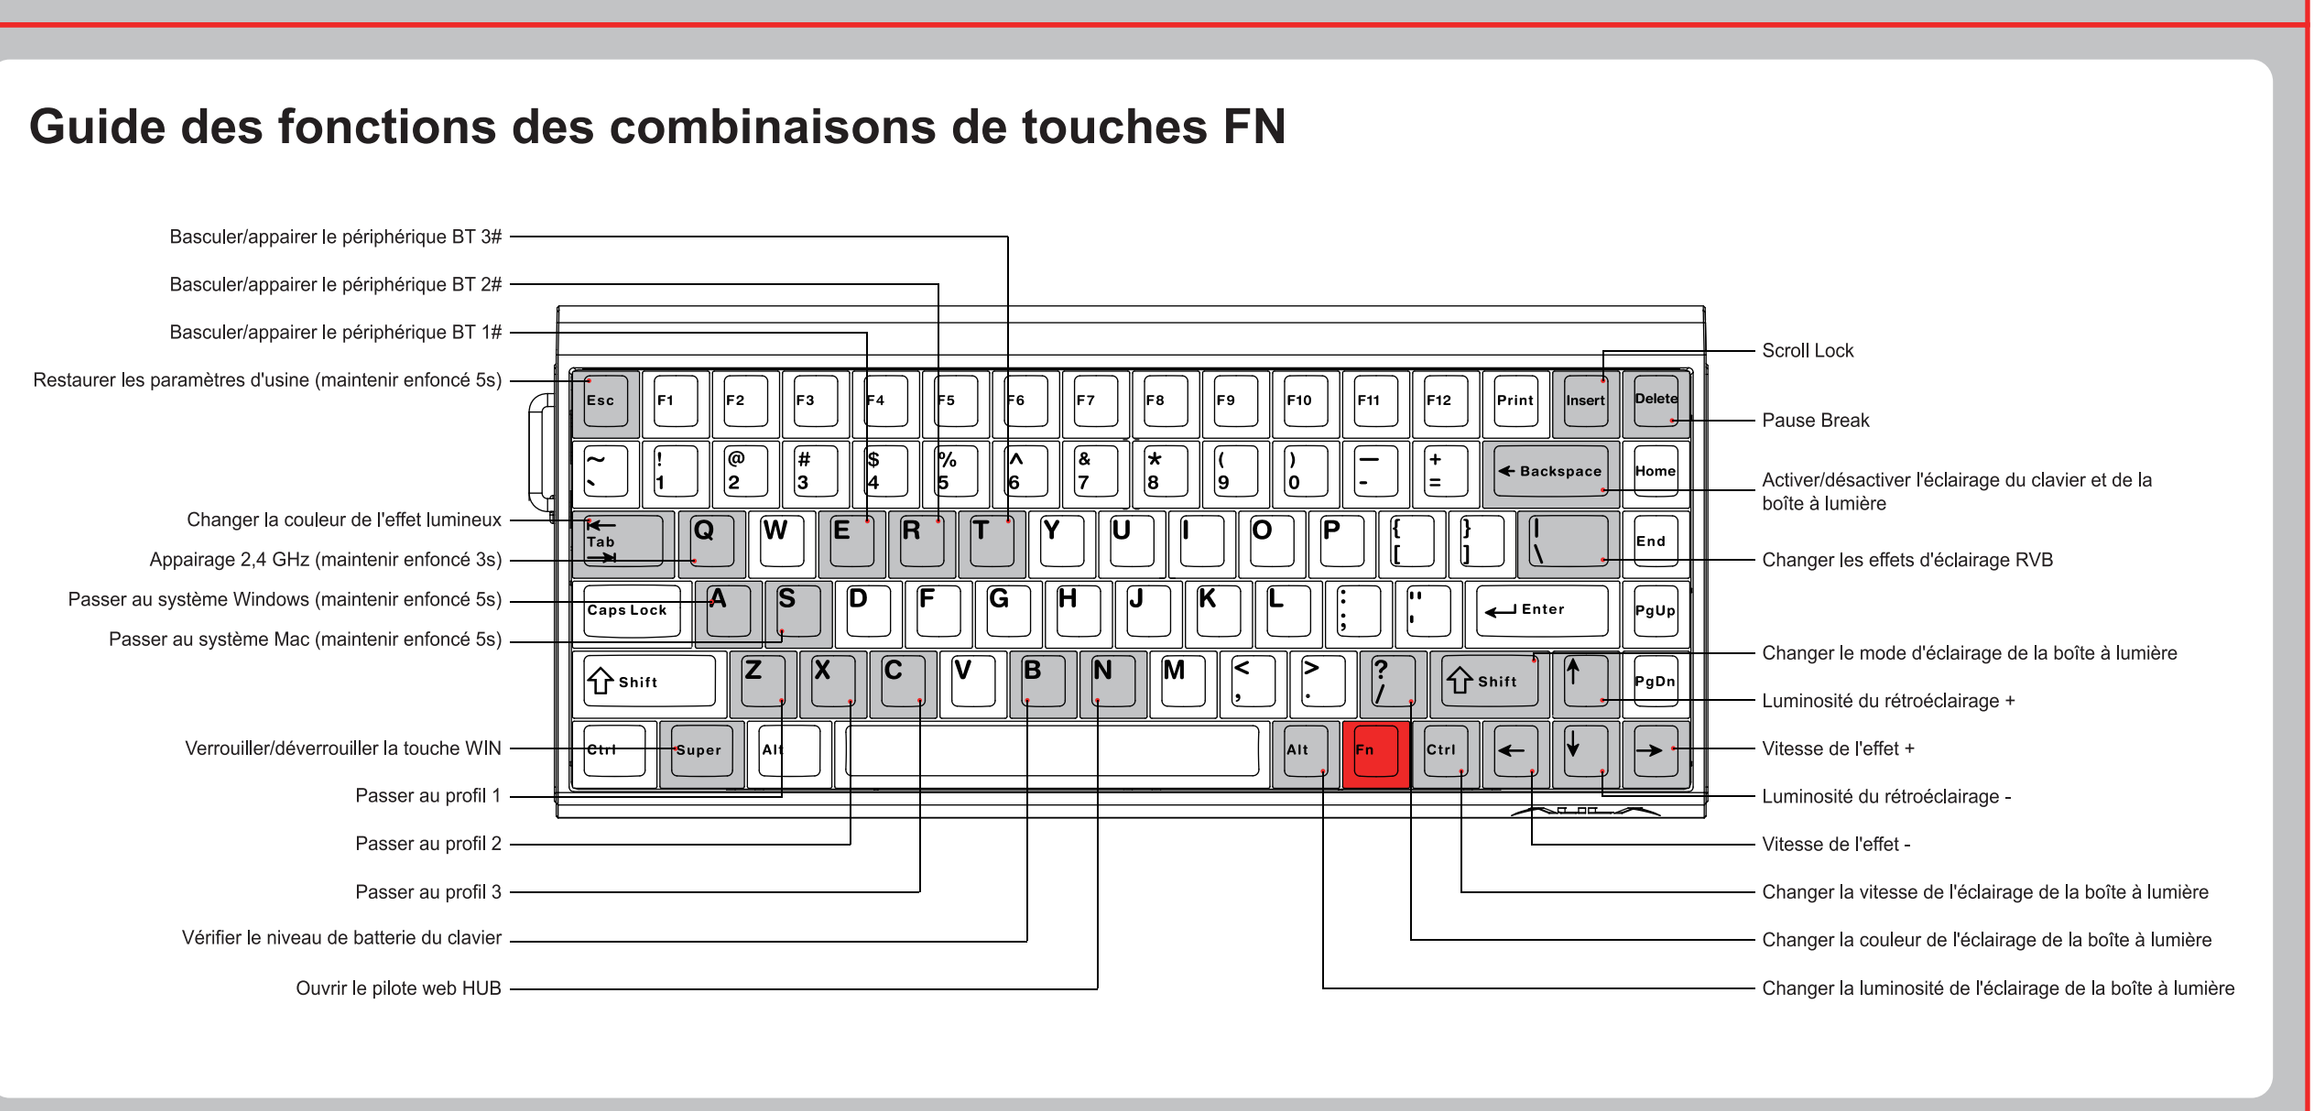


Посібник із функцій комбінацій клавіш FN

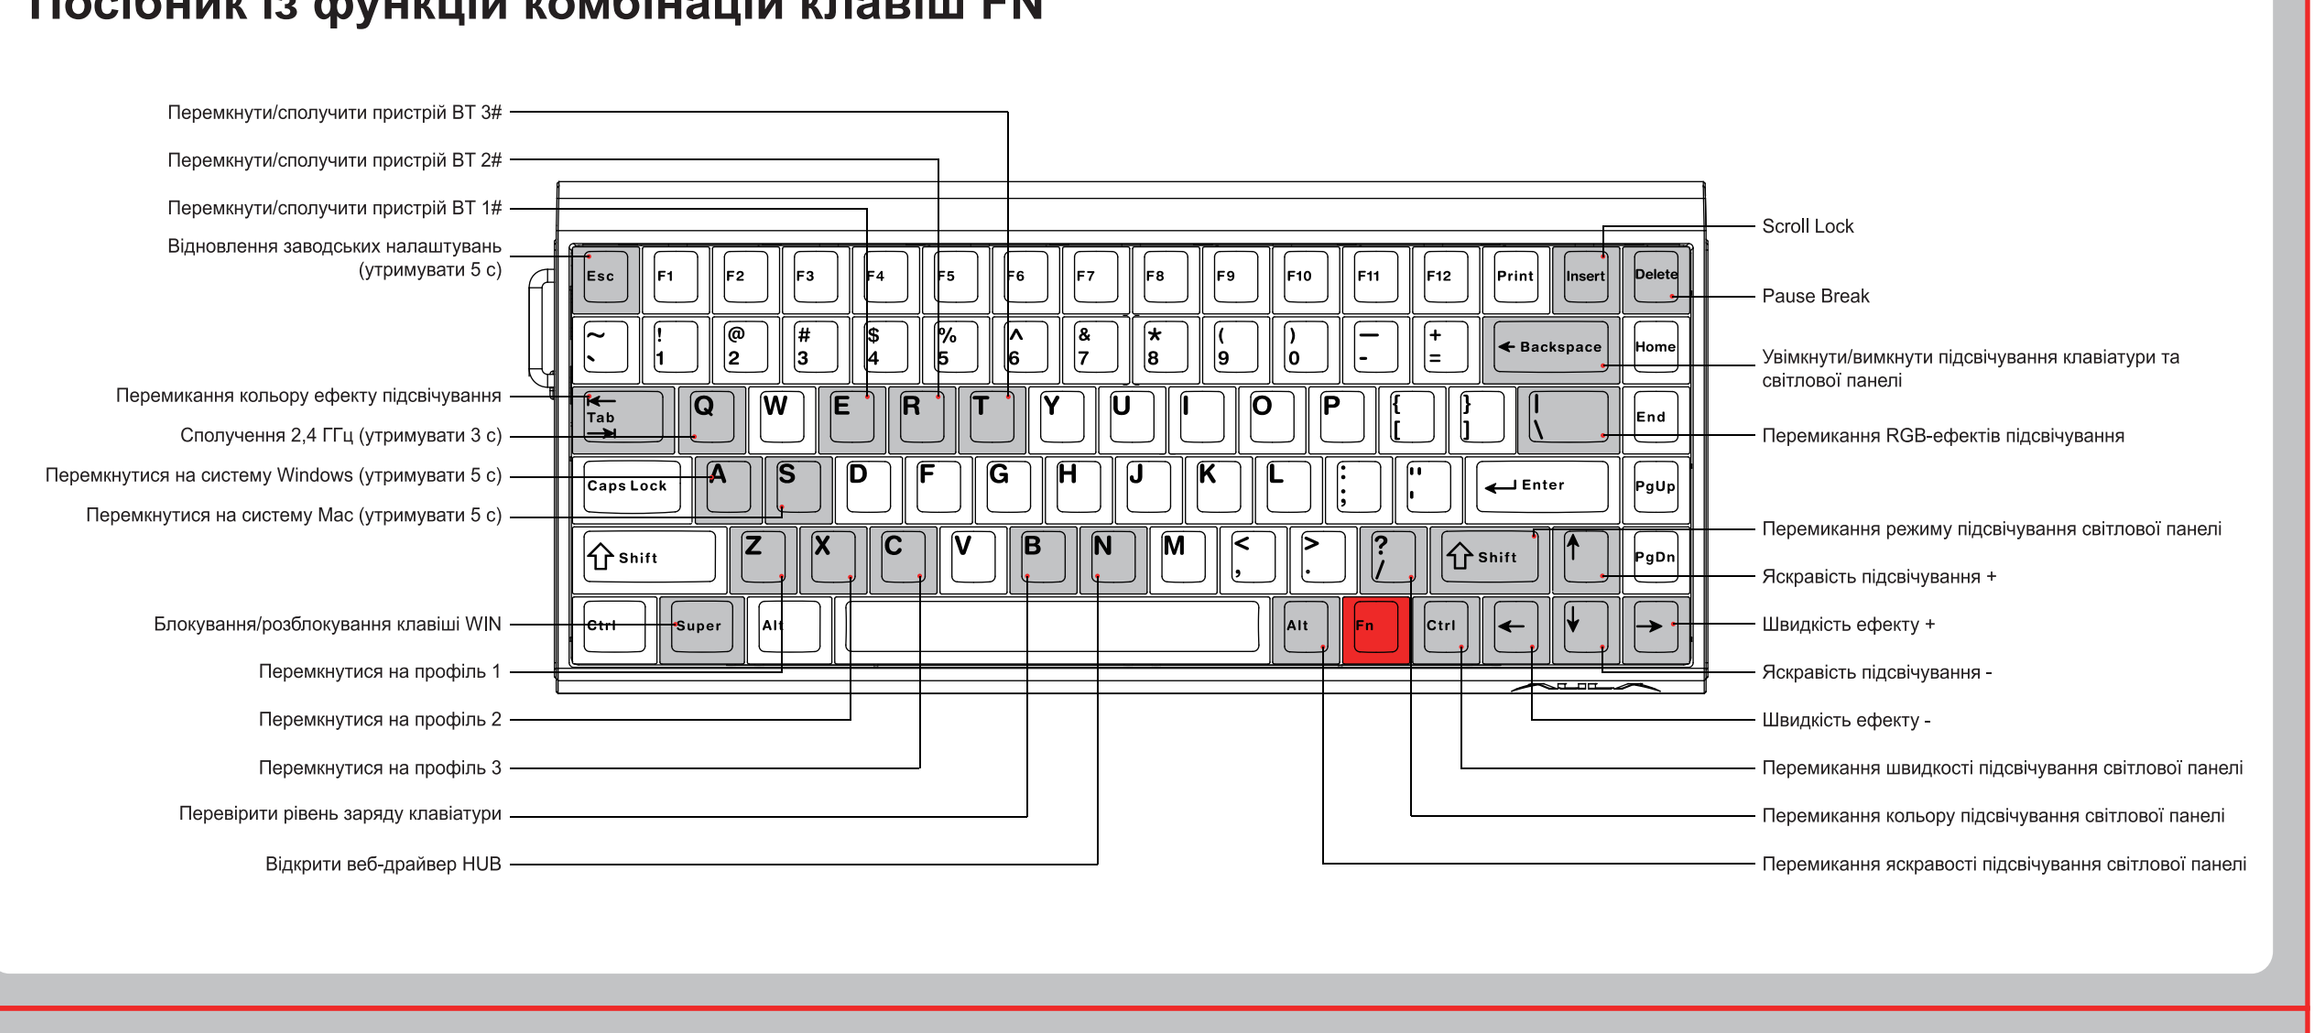


Panduan Fungsi Kombinasi Tombol FN

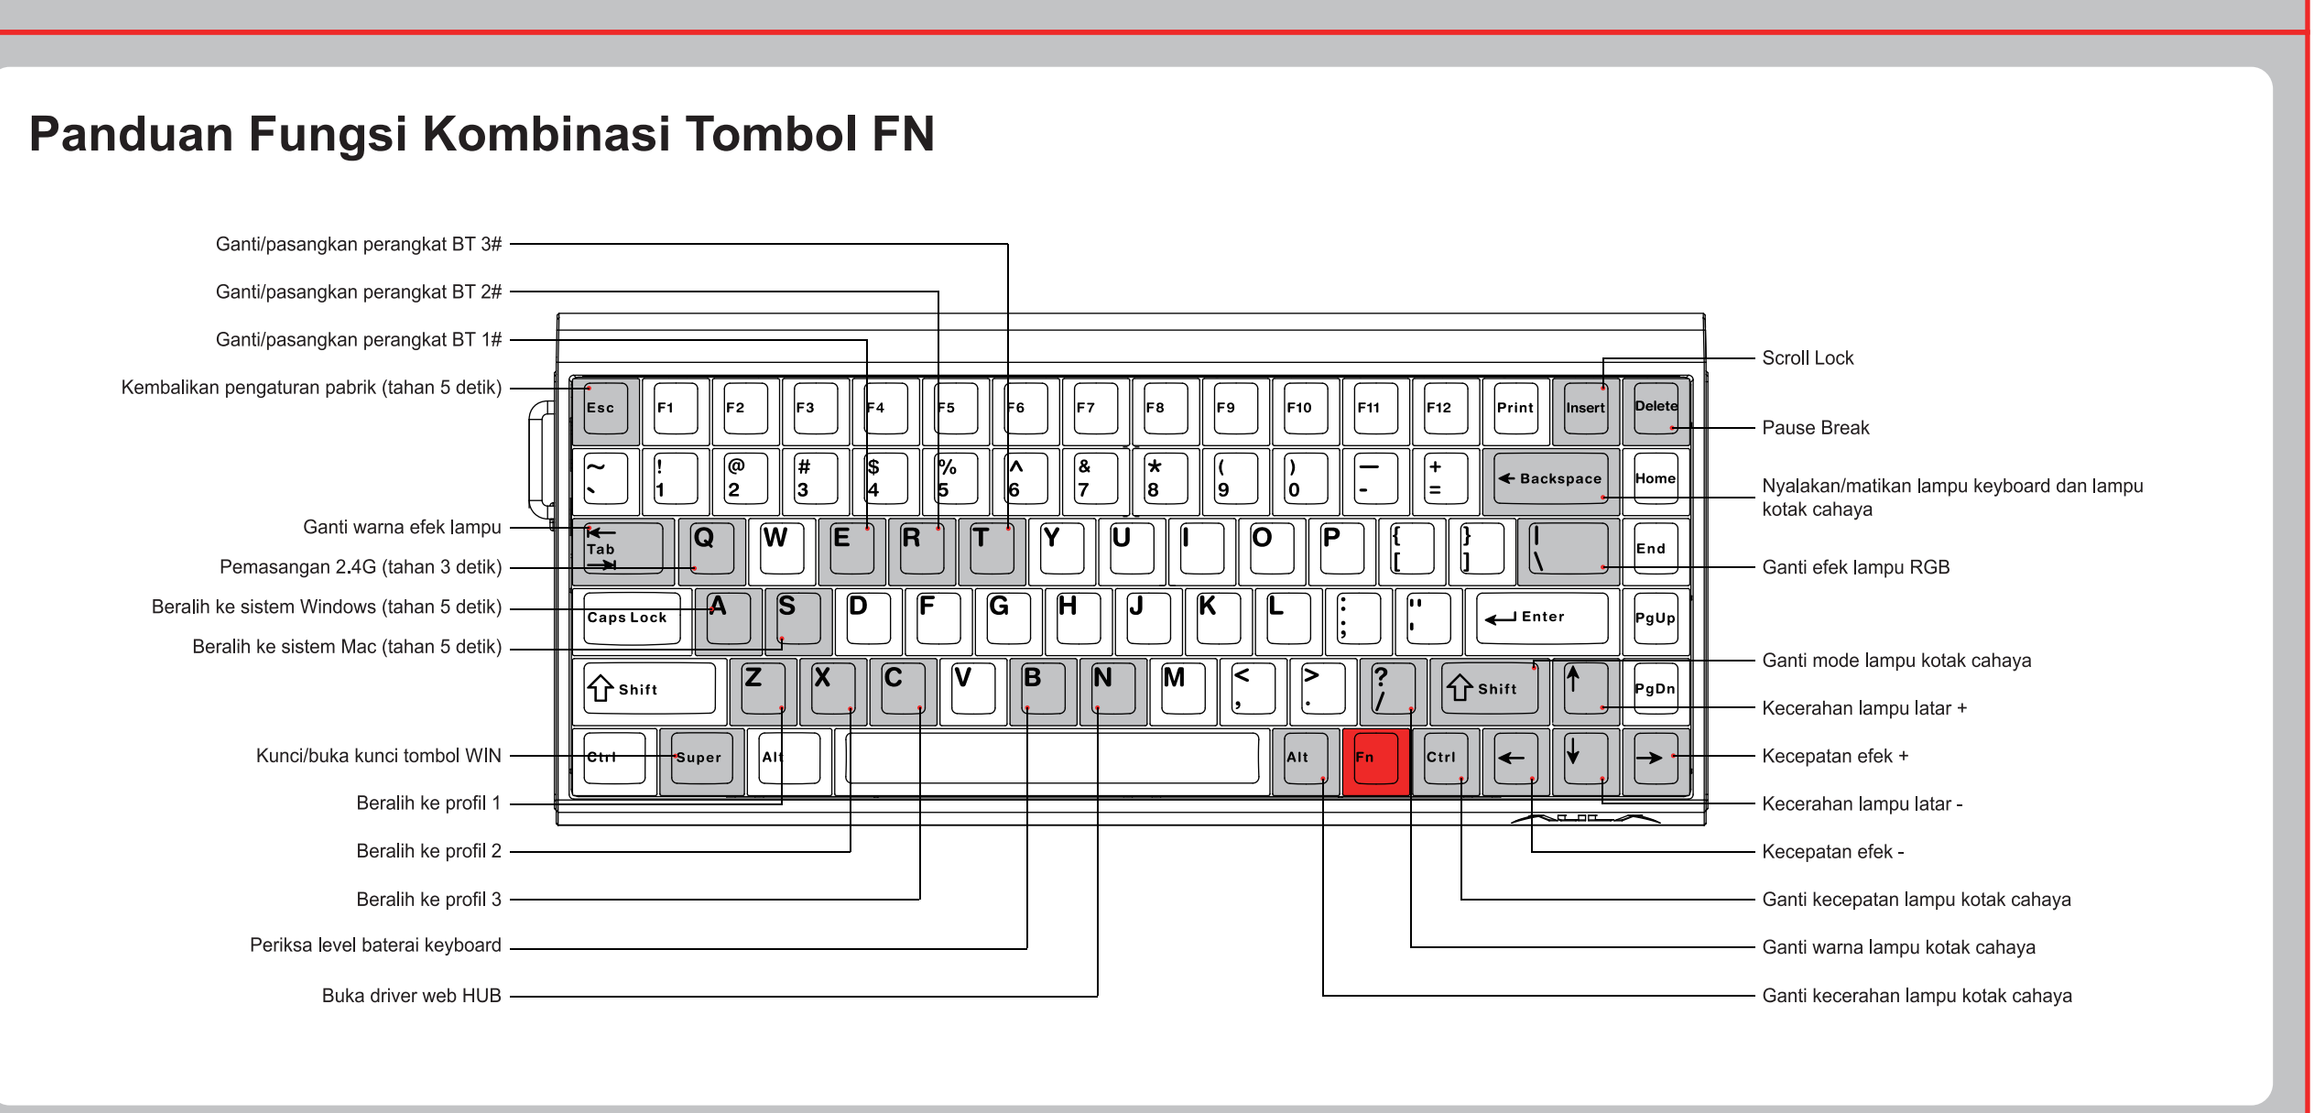


FN キーコンビネーション機能ガイド

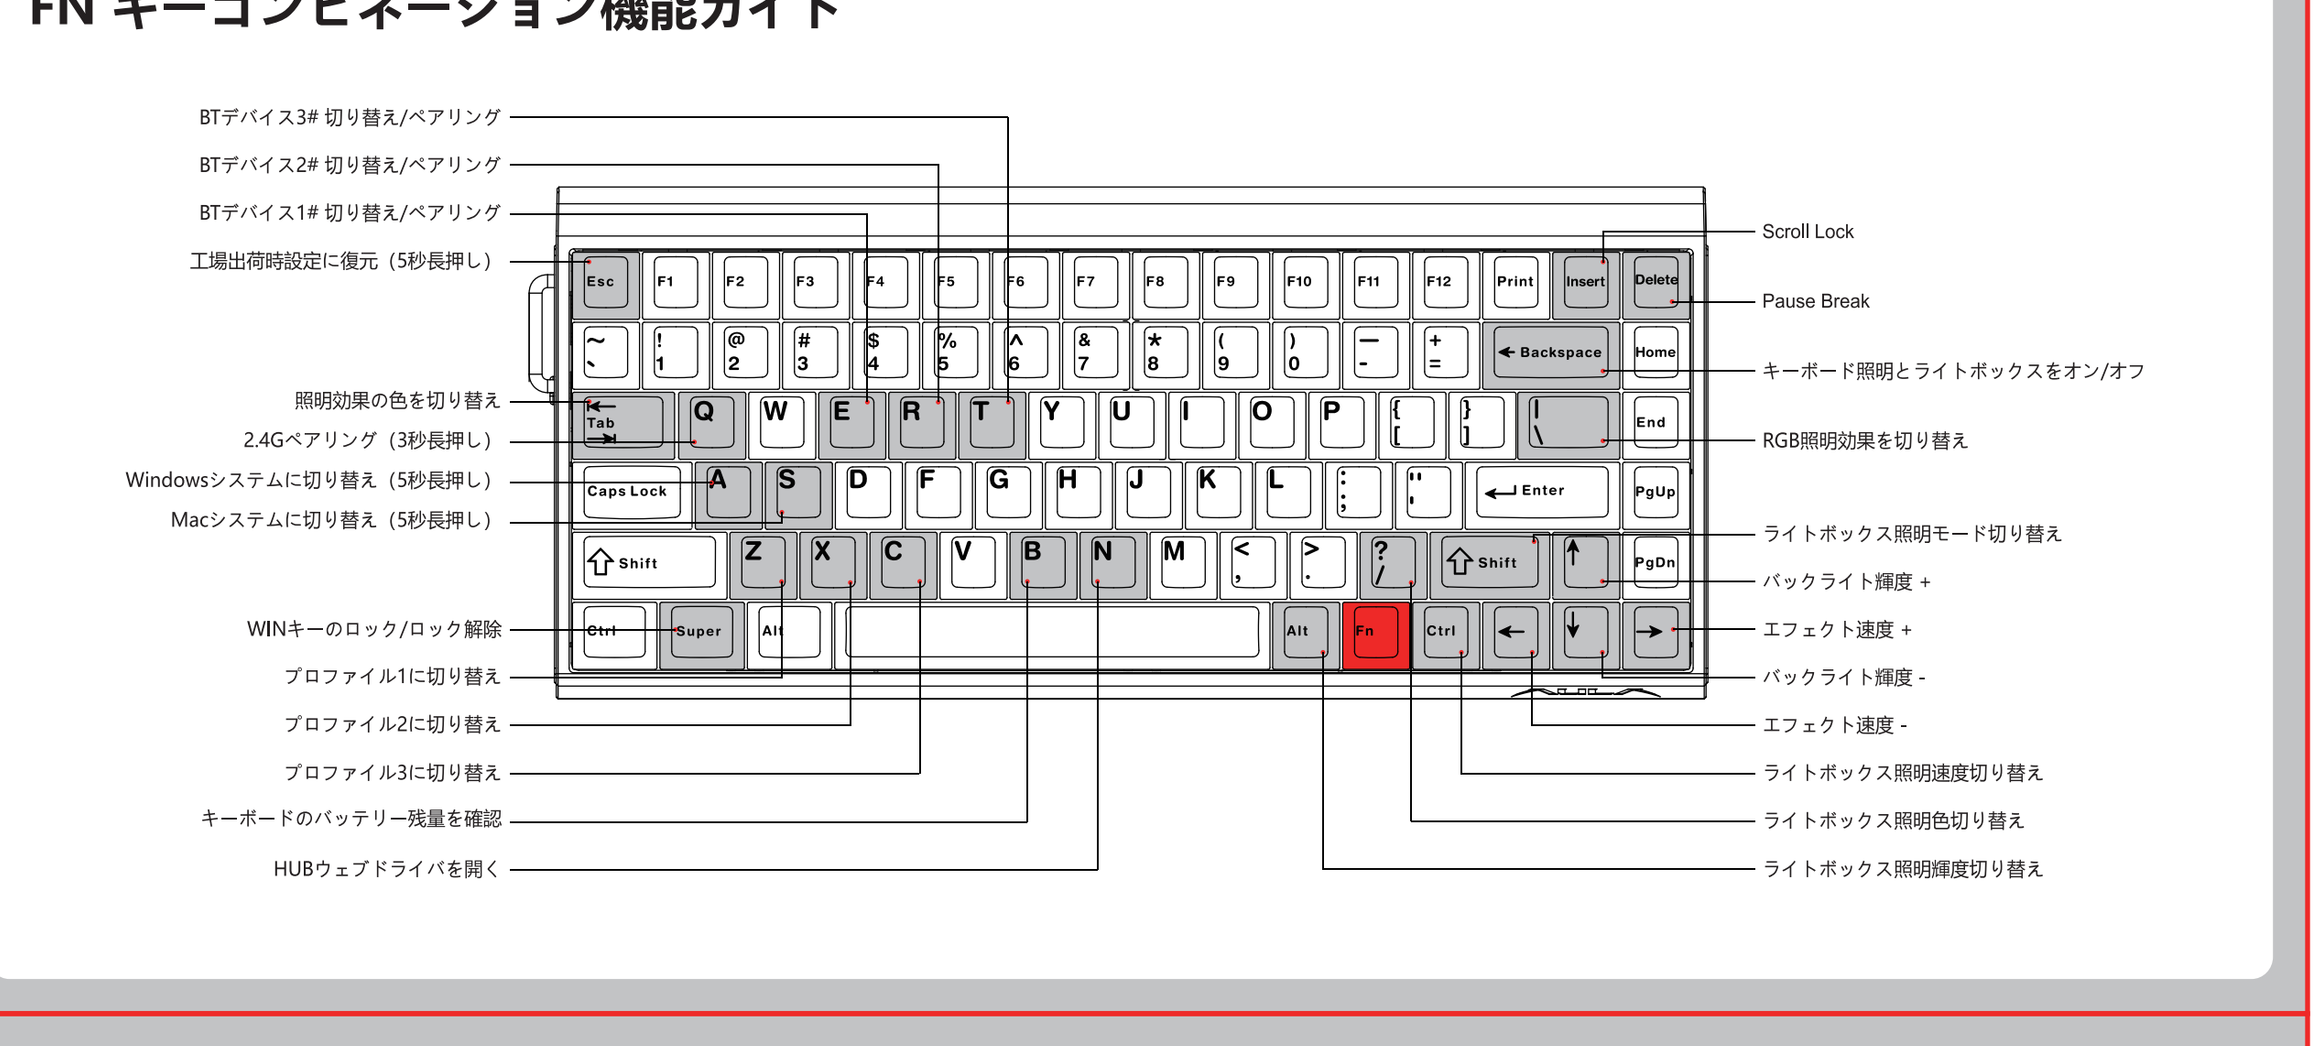

FN 組合鍵功能指南

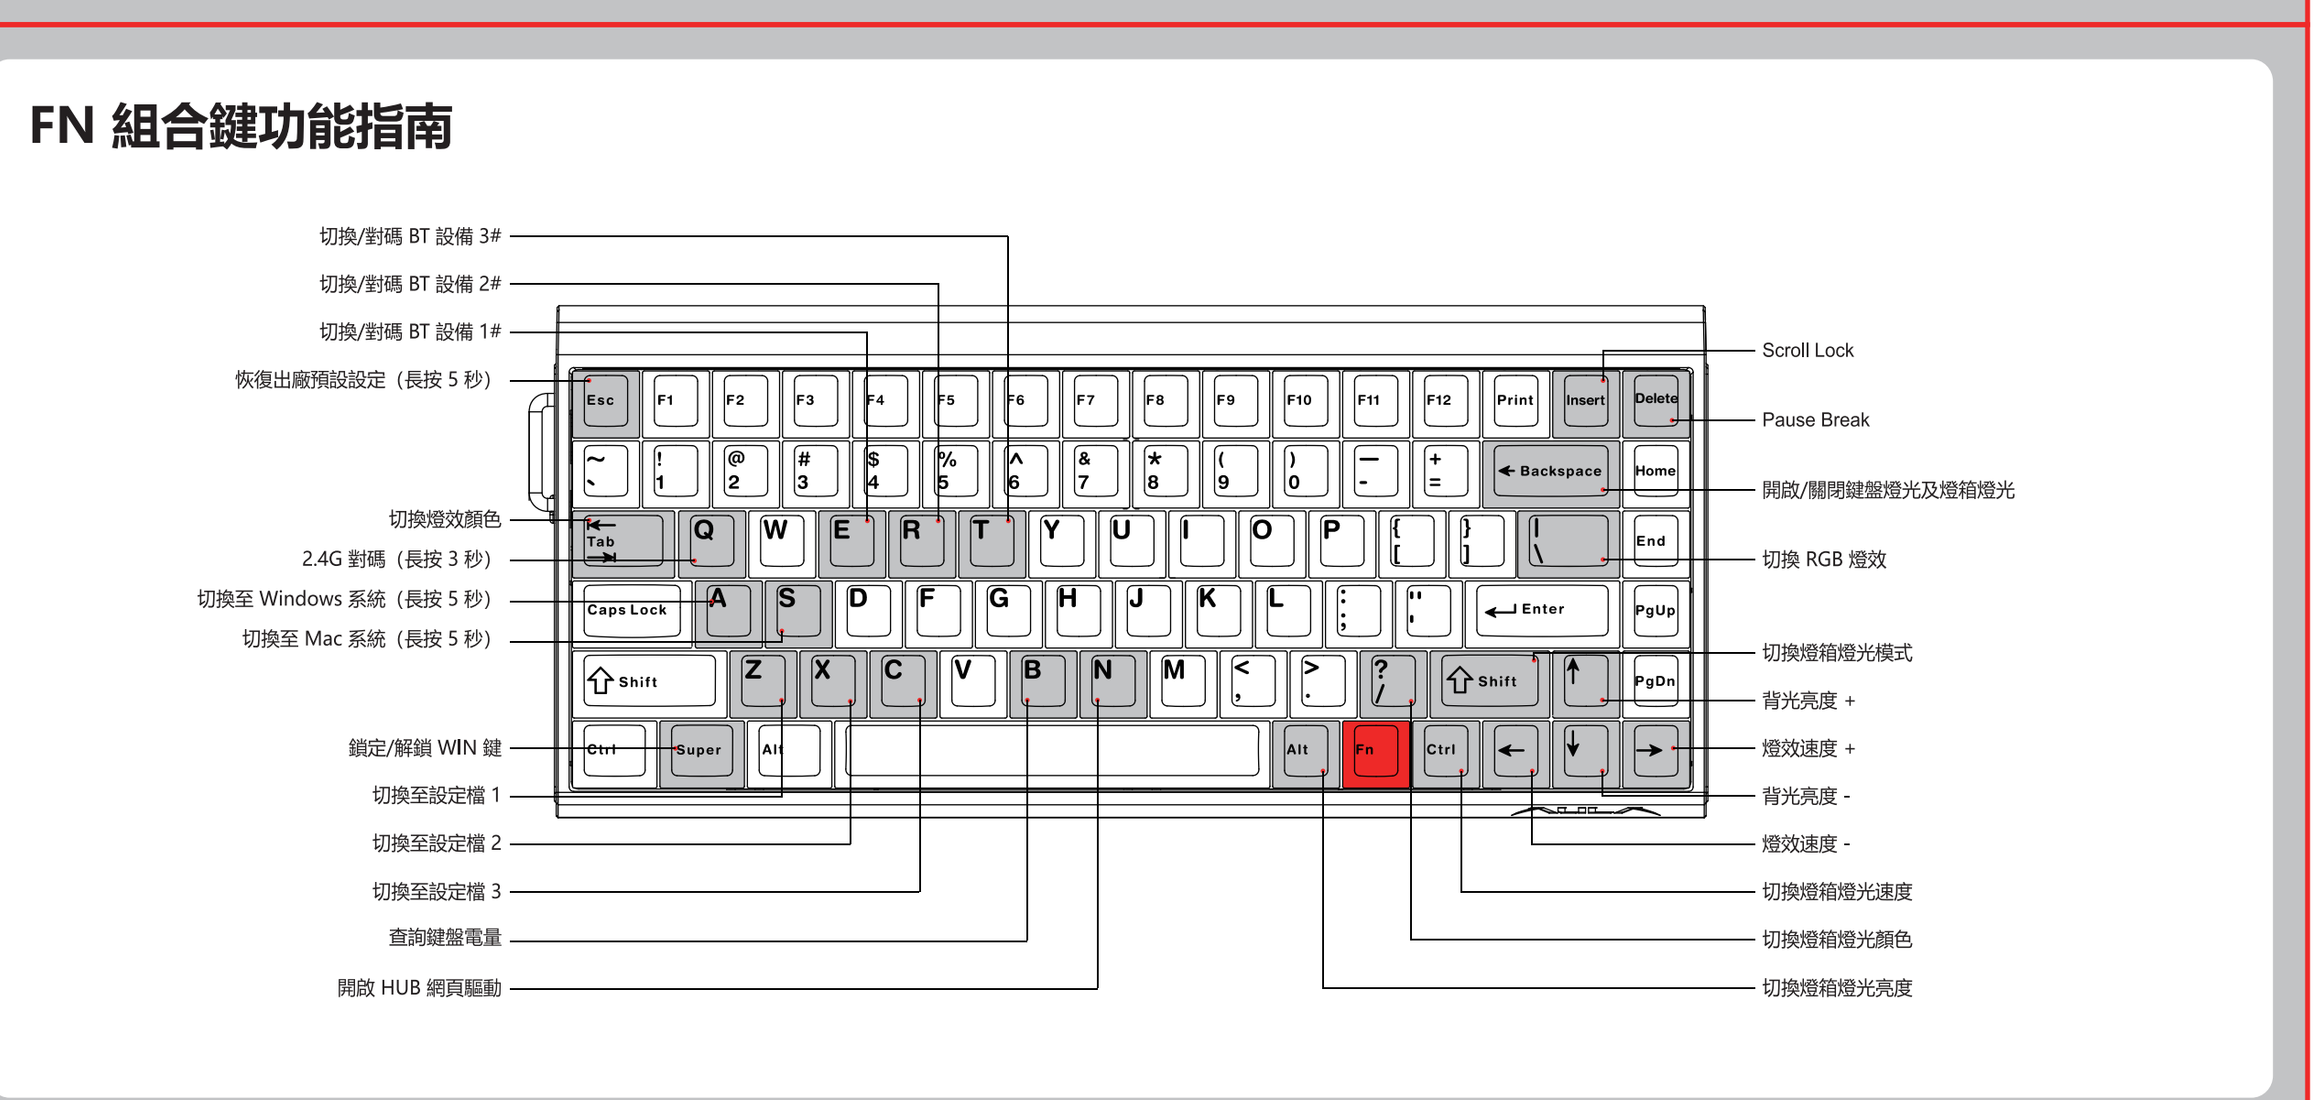

Hướng dẫn chức năng tổ hợp phím FN

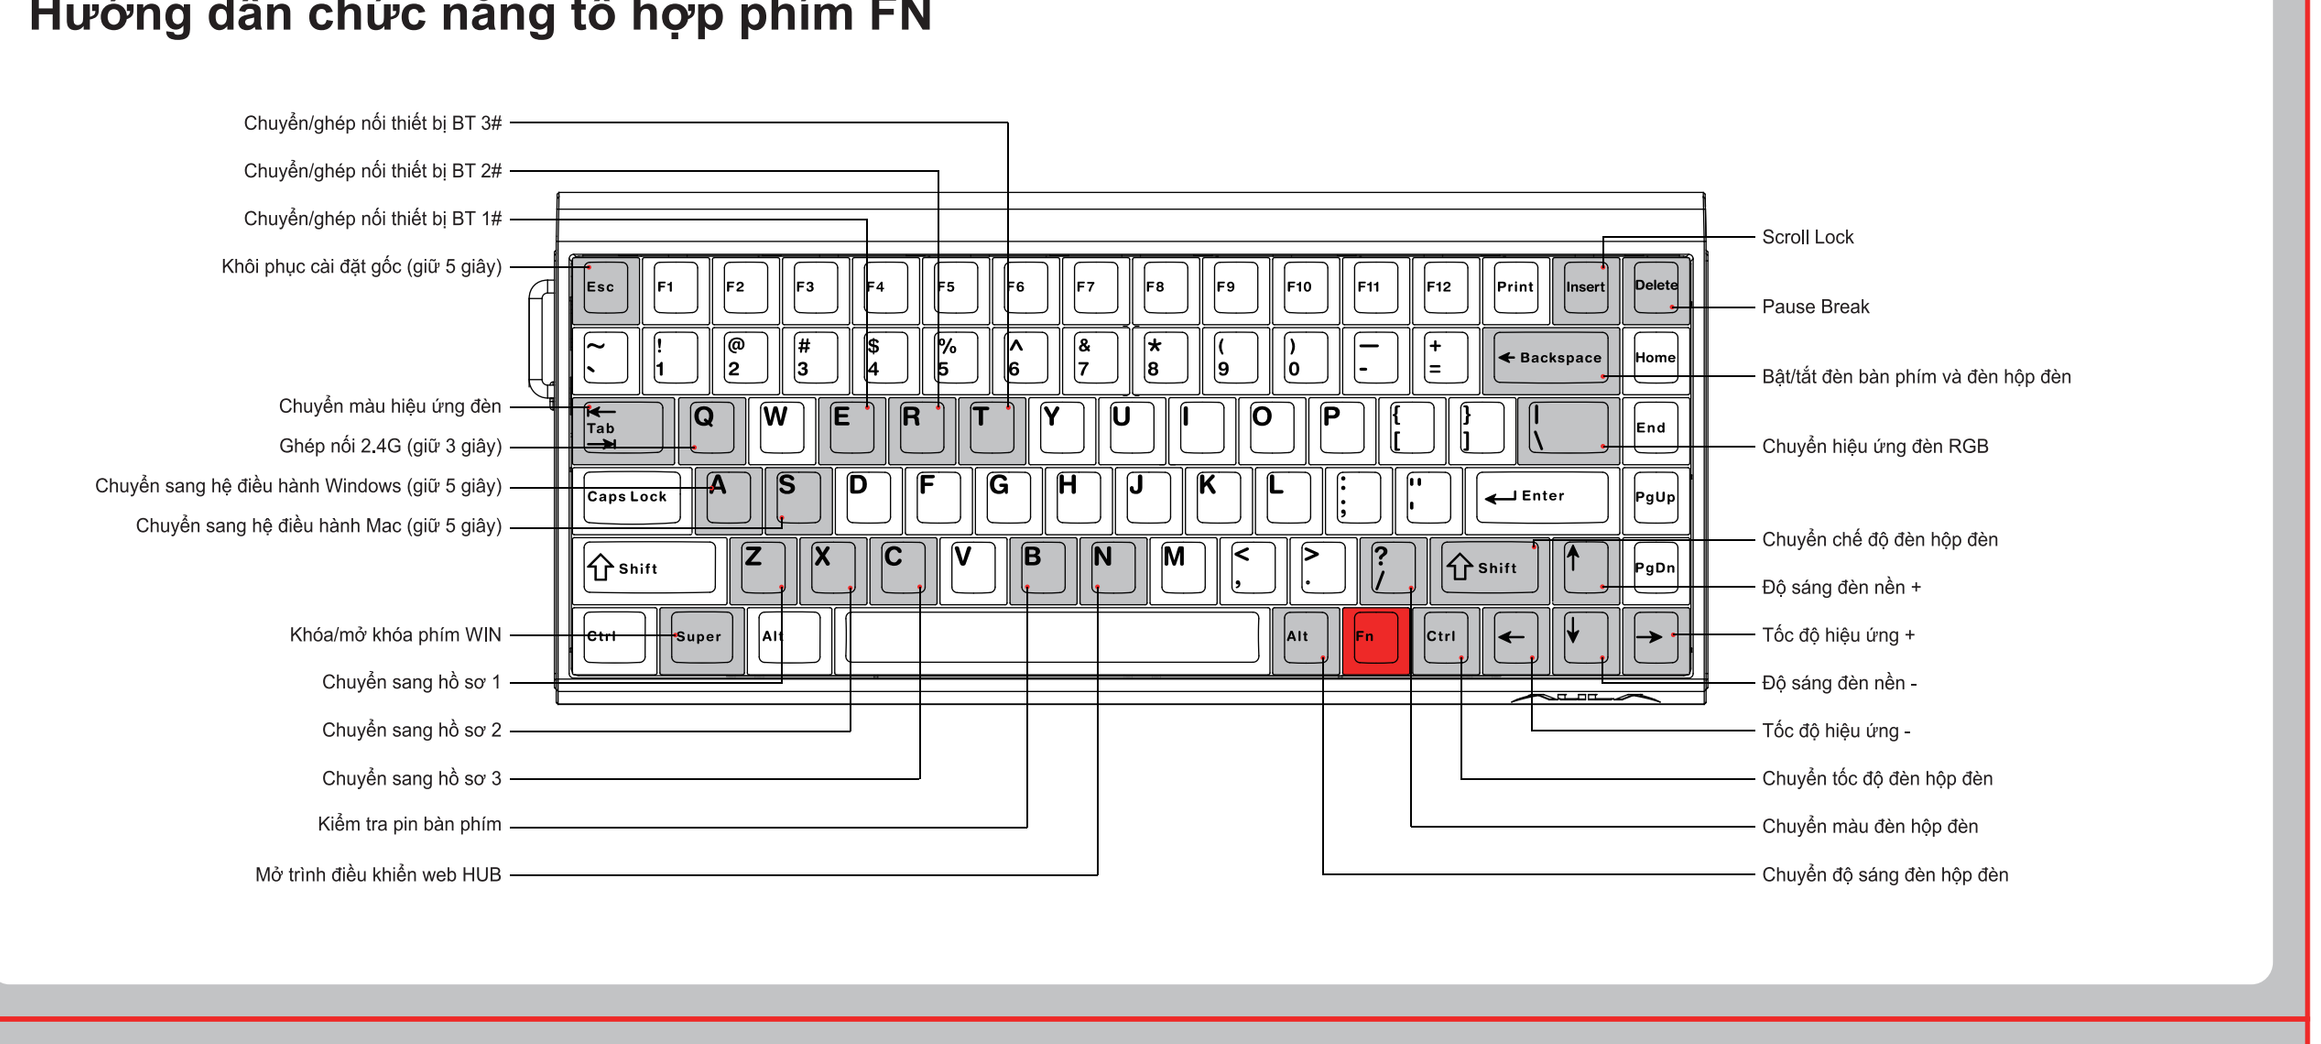

At AULA, passion isn't a feeling - it's our engineering standard. From our industrial roots to the global stage, we obsess over every micron of precision because we know what's at stake. We don't just build gear; we build the bridge between a player's instinct and their ultimate victory. Every click, every win, every heartbeat.

Fuel Your Passion

ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.
Спасибо за выбор продуктов AULA.
Компьютерные Клавиатура и мышь – основные устройства управления компьютером, предназначены для ввода данных (могут быть проводными или беспроводными (2.4 Ггц с передатчиком в комплекте или Bluetooth без передатчика)).
Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голоса) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4Ггц, Bluetooth, 2.4Ггц+ Bluetooth).
Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.
Стенд/Подставка для ноутбука/планшета необходима для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.
Колонки 2.0/2.1 предназначены для воспроизведения музыки и других аудио файлов, подключаются к ПК, ноутбукам, планшетам, смартфонам через разъем 3.5 мм, питаются от USB.

USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопители памяти, дополнительные мониторы и проводной интернет.
Подробные характеристики товара находятся на сайте www.aulagaming.ru
Подключение:
Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB/аудиоразъему (для гарнитур/ колонок) и проверьте работоспособность.

Изготовитель: DONGGUAN SUOAI ELECTRONICS CO.,LTD. Address: NO.3 HUAYU STREET,CHANGLONG VILLAGE HUANGJIANG TOWN,DONGGUAN CITY. Донгуан Суойа Электроникс Ко. ЛТД. Адрес: НО.3 ХУАЮ СТРИТ.ЧАНГЛОНГ ВИЛЛАДЖ ХУАНГЖИАНГ ТАУН .ДОНГГУАН СИТИ. Импортер/Организация уполномоченная принимать претензии: ООО «Техпорт». Адрес: 107140, Москва г, внутригородская территория муниципальный округ Красносельский, 1-Й Красносельский ПЕР., дом № 9А, офис Этаж 3, Часть Пом. 9В, 9Г. телефон: +79153075886, электронная почта: Oootechport@ya.ru. Товар соответствует требованиям ТР ТС 037/2016 «Об ограничении применения опасных веществ в изделиях электротехники и радиоэлектроники» (для компьютерных мышей, клавиатур и гарнитур/колонок), а так же ТР ТС 020/2011 «Электромагнитная совместимость технических средств» (для колонок, Bluetooth/2.4Ггц гарнитур, клавиатур и мышей с беспроводным способом подключения (Bluetooth/2.4Ггц)).Информация о разрешительной документации размещена на упаковке. Коврики для мыши/стенды/ подставки для ноутбука/планшета обязательной сертификации не подлежат. Информация о гарантийном обслуживании предоставлена на сайте www.aulagaming.ru. Гарантийный срок: 1 год. Срок службы: 2 года. Срок годности: не ограничен. Дата производства указана на упаковке. Использовать только по прямому назначению. Не ронять, не разбирать, беречь от огня, перегрева и попадания жидкости. Конструкция, внешний вид и технические характеристики могут быть изменены без предварительного уведомления. Страна изготовления: Китай.

www.aulagaming.ru

Dongguan Suoai Electronics CO.,LTD
www.aulastar.com
SOAI Industry Park,Huayu Street Changlong Village Huangjiang Town Dongguan City Guangdong Province
Execution Standard:GB/T 14081-2010
Made in China

RoHS COMPLIANT

Points de collecte sur www.quefairedemesdechets.fr

正面


反面

说明书技术要求：

1.成品尺寸：170mm×80mm

2.材质：128g铜版纸

3.工艺：风琴折(四色正反面印刷)

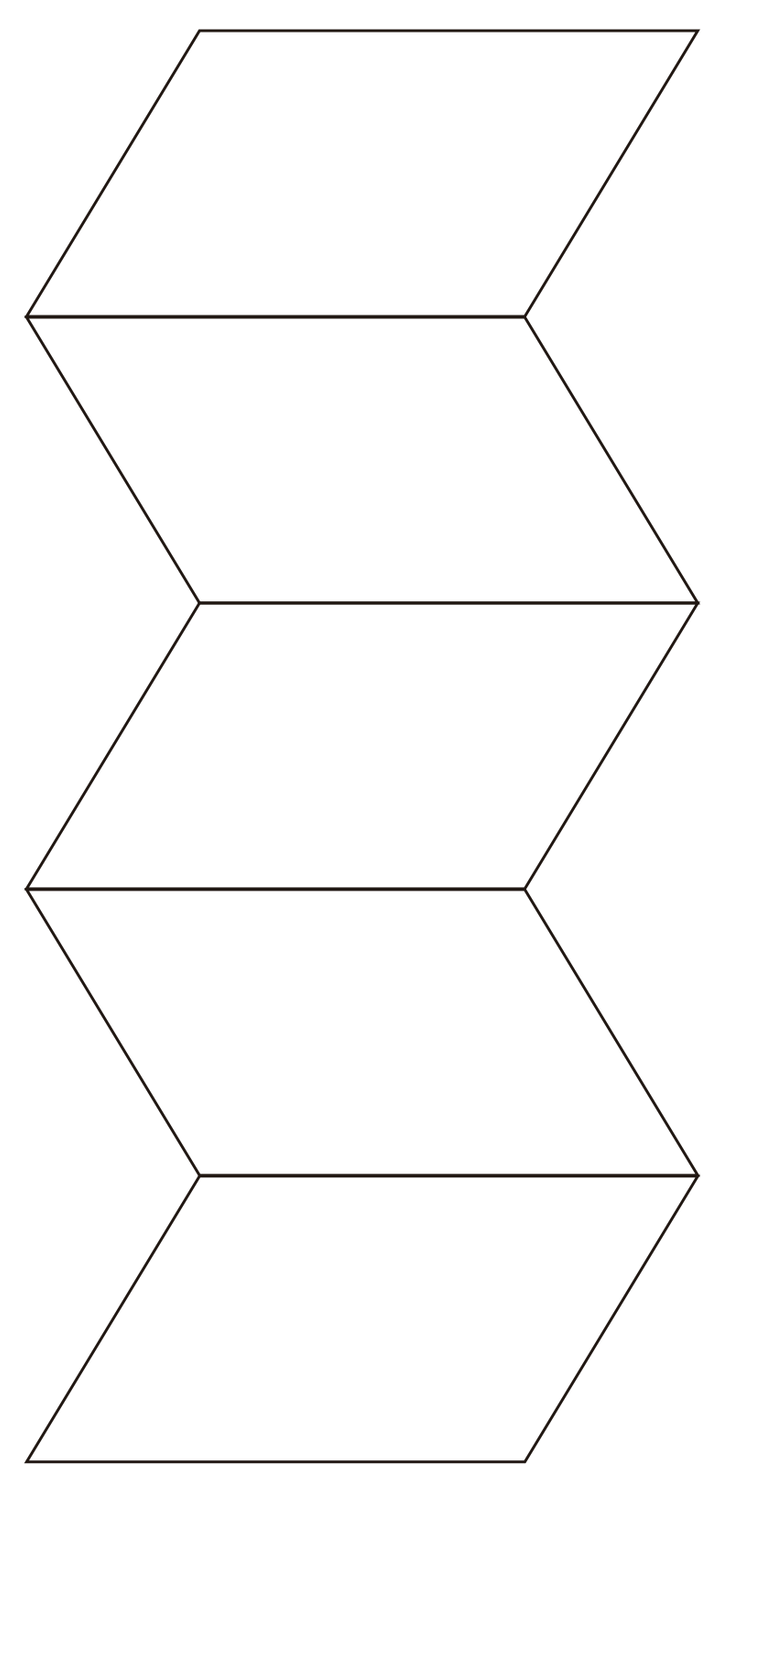

1788 C　420 C

CMYK　100　00　00　00