封面

AULA

F99 PRO

TRI-MODE FULL-SIZE MECHANICAL KEYBOARD

FUEL YOUR PASSION

Tri-mode Mechanical Keyboard Connection Instructions

USB-C Wired Connection
Set the keyboard mode switch to the "Wired" position, then use the USB-C cable included in the package to connect the keyboard to a USB port on your computer.
2.4G Wireless Connection
Set the keyboard mode switch to the "2.4G" position, take out the 2.4G receiver from the keyboard storage compartment, and plug it into a USB port on your computer. Then press the screen, press and hold Fn + ~ (the key with the Matchstick) and then Insert (the key with the screen), pairing will be completed automatically. The receiver is already pre-paired by default from the factory.
BT Wireless Connection
Set the keyboard mode switch to the "BT" position, then press and hold Fn + 1 / 2 / 3 for about 3 seconds until the indicator light flashes rapidly, entering pairing mode.
Note: Use the first switch the keyboard's upper-left switch to the corresponding mode (using Fn + / Fn+1 / Fn+2 / Fn+3) before you can press and hold the key to initiate pairing.

Product Specifications

-Number of keys: 99
-Total stroke of buttons: 4.0mm
-Fn key multifunction
-Product size: 350.31x43.28x0.1mm
-Product weight: approximately 1200g (excluding wire/receiver)
Approximately 1254g (including wire/receiver)
-Charging voltage/current: DC 5V ⎓ 1200mA
-Rated voltage: DC 3.7V (fully charged with 4.2V)
-Rated current: 250mA @ 3.7V (default light effect)/20 mA (turn off all lights)
-Battery life: approximately 32 hours (default light effect)/
approximately 1000 hours (turn off all lights off)
-Battery capacity: 8000mAh (2x4000mAh) rechargeable lithium battery
-Charging interface: Type-C interface

Product Introduction

- Fashionable appearance design, 99 key layout with knob, Gasket structure, PCB single key slotting, delicate and soft touch.
- The keycaps and mechanical switches can be plugged in and out, and users can also purchase various brands of switches and personalized keycaps on the market to DIY.
- The keyboard is made of solid materials and has a responsive keyboard.
- Two stage tripod with independent storage receiver.
- Humanized keyboard design, combined with Fn to add a series of commonly used shortcut function keys.
- Keyboard pulling rate: wired mode 1000Hz, 2.4G mode 1000Hz, BT mode 125Hz.

Please visit the AULA official website to download the driver to use this product.

AULA driver software provides a customizable user experience.
Please use the AULA driver to access this feature.

www.aulastar.com

This application is used to perform the following functions:

- tomize key assignments and FN layers
- Factory reset
- Adjust lighting colors and effects
- Firmware upgrade
- Performance tuning
- Macro programming

Maintenance and Care

- Avoid liquids: Do not rinse the keyboard with water or spray any liquid directly onto its surface. Liquids may cause short circuits inside the keyboard or oxidation of metal contacts.
- Avoid harsh cleaners: Do not use cleaning agents containing corrosive substances (e.g., ammonia, strong acids, or alkalis). These may erode the keycap coating or plastic housing, leading to discoloration or brittleness.
- Avoid extreme environments: Do not expose the keyboard to dusty or humid conditions for extended periods.

Charging instructions

1. It is recommended to use only the computer USB port to charge the keyboard.
2. Do not use fast-charging cell phone chargers to charge the keyboard.
3. Do not use inferior non-standard power adapter to charge the keyboard.
4.Do not use over-voltage and over-current power adapter to charge the keyboard.
5.Please keep away from high temperature equipment when charging
6. Please turn off the power switch if it is not used for a long time.
7. The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)

FN Key Combination Function Guide

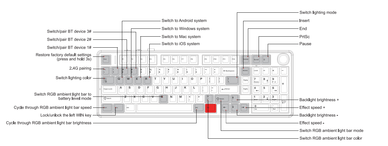

FN 키 조합 기능 안내

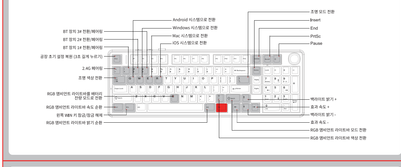

Guia de Funções das Combinações de Teclas FN

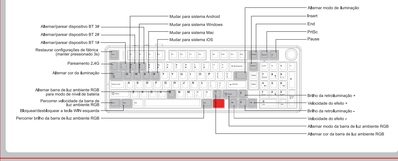

Guia de Funciones de Combinaciones de Teclas FN

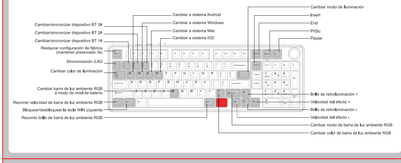

FN-Tastenkombinations-Funktionshandbuch

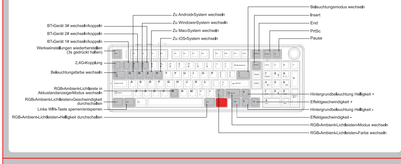

Guida alle Funzioni delle Combinazioni di Tasti FN

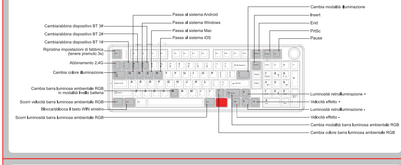

FN Tuş Kombinasyonları Fonksiyon Kılavuzu

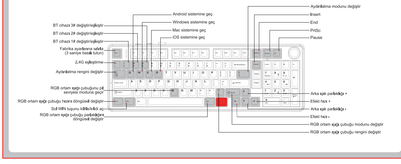

Руководство по функциям комбинаций клавиш FN

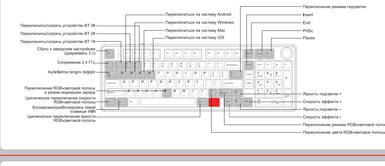

คู่มือฟังก์ชันการรวมปุ่ม FN

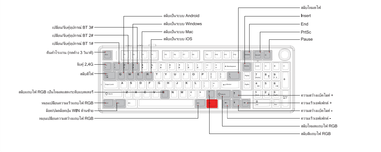

Guide des fonctions des combinaisons de touches FN

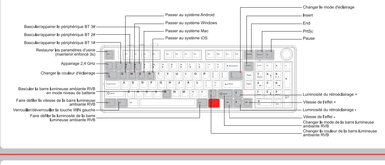

Посібник із функцій комбінацій клавіш FN

Panduan Fungsi Kombinasi Tombol FN

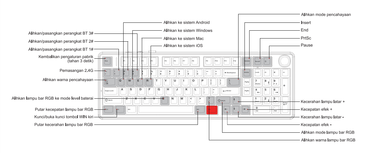

FN キーコンビネーション機能ガイド

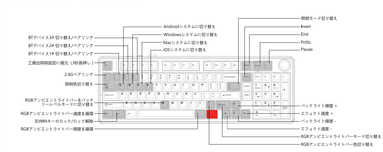

FN 组合键功能指南

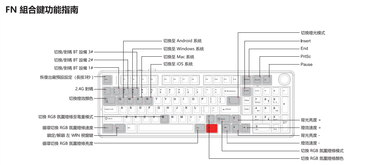

Hướng dẫn chức năng tổ hợp phím FN

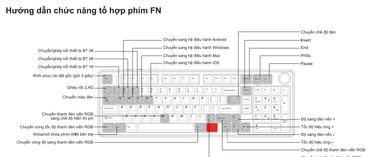

AULA

At AULA, passion isn't a feeling - it's our engineering standard. From our industrial roots to the global stage, we obsess over every micron of precision because we know what's at stake. We don't just build gear; we build the bridge between a player's instinct and their ultimate victory. Every click, every win, every heartbeat.

Fuel Your Passion

AULA

ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.
Спасибо за выбор продуктов AULA.
Компьютерные Клавиатура и мышь – основные устройства управления компьютером, предназначены для ввода данных (knt) с быть проводными или беспроводными (2.4 Гц с передатчиком в комплекте или Bluetooth без передатчика).
Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голос) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4Hz, Bluetooth, 2.4Hz и Bluetooth).
Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.
Стенд/Подставка для ноутбука/планшета необходимы для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.
Колонки 2.0/2.1 предназначены для воспроизведения музыки и других аудио файлов, подключается к ПК, ноутбуку, планшетам, смартфонам через разъем 3.5 мм, питается от USB.

USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопителя памяти, дополнительные мониторы и проводной интернет.
Подробные характеристика товара находятся на сайте www.aulagaming.ru
Подключение:
Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB(подрозумевает (для принтер) клавиш) и проверьте работоспособность.

www.aulagaming.ru

Dongguan Suwai Electronics CO.,LTD
www.aulastar.com
SOHO Industry Park, Huayu Street Changkeng
Village Huangjiang Town Dongguan City
Guangdong Province
Execution Standard:GB/T 14081-2010
Made in China

封底

说明书技术要求：
1.成品尺寸:170mm×80mm
2.材质:128g铜版纸
3.工艺:风琴折(四色正反面印刷)

1788 C　420 C

CMYK　100　00　00　00